

MEGAMAN[®]

2026 PRODUCT GULDE

INNOVATIVE LED SOLUTIONS

LIGHTING THE WAY

TO NET ZERO



W W W . M E G A M A N U K . C O M











Welcome to the MEGAMAN® Product Guide 2025. It's packed with innovative, great quality, and value for money LED lighting solutions: designed specifically to meet the day to day demands of our UK wholesaler partners and their contractor customers.



ADAPTABLE, HIGH PERFORMANCE & HIGH QUALITY LED FIXTURES





VALUE FOR MONEY, RELIABLE EVERYDAY LED FIXTURES



& ECONOMY LED LAMPS



We are excited to introduce our new and comprehensive range of high-quality LED lighting products, which includes:

Megaman Performa Range: This high-performance range features premium materials and advanced technologies such as motion sensors, emergency compatibility, dual beam technology (DBT), and colour change technology (CCT). Also included are the new eco-designed and sustainable **XChange**® modular fixtures, engineered to provide exceptional performance while balancing safety, sustainability, and energy efficiency.

Essentials Range: Known for its cost-effective and reliable solutions, the Essentials range remains the go-to choice for contractors and wholesalers. It delivers innovation, reliability, and excellent value for both retrofit and new-build installations.

Professional & Economy LED Lamp Collections: Megaman's trusted, ever-evolving LED lamp collections continue to offer ideal, budget-friendly lighting solutions for contractors and wholesalers across the UK.

TEMPUS® Emergency Lighting Range: Our expanding TEMPUS® range offers energy-efficient LED emergency lighting solutions for homes, offices, commercial spaces, and more.

With our well designed lighting product ranges - all actively supported with high levels of customer service - we're confident that you'll find the ideal solution for you.

MEGAMAN® UK-WIDE PROFESSIONAL SALES TEAM


The Megaman Business Development team have been specifically trained to enhance our relationship with our customers and to ensure that we offer the individual support that they require.

Technical product advice and suggestions to ensure that the correct lighting solutions are selected for each clients requirements.

Recommendations on how to reduce energy consumption and save on energy bills.

Help in lowering carbon emissions to meet Government targets and fulfil ISO accreditations.

Advice on changes in regulations. Guidance on new lamp and lighting technologies.

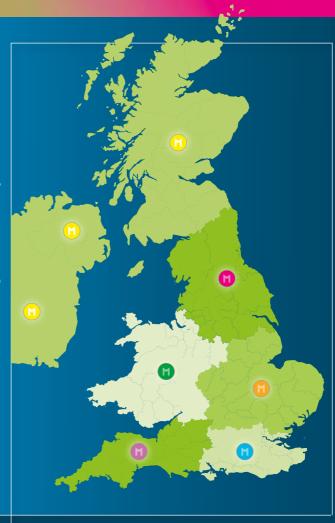

CALL: 01707 386000 EMAIL: sales@megamanuk.com SCOTLAND, N. IRELAND, ISLE OF MAN & REPUBLIC OF IRELAND CONTACT: 07931 817211

NORTH ENGLAND

CONTACT: 07958 172109

WALES & WEST MIDLANDS

CONTACT: 07931 817212

EAST MIDLANDS & ANGLIA CONTACT: 07813 695891

CONTACT: 07976 620377

SOUTH WEST

CONTACT: 07811 144540

CONTENT



xChange

LED PANELS	16-27
LED BATTENS	28-65
LED BULKHEADS	66-81
LED HIGH BAYS	82-93
LED FLOODLIGHTS	94-107
LED FIRE-RATED DOWNLIGHTS	108-123
BATHROOM FIXTURES	124-131
UNDER CABINET LIGHTING	132-139
TRACK LIGHT FITTINGS	140-145
EMERGENCY LIGHTING	146-161
ACCESSORIES	162-165
LED LAMPS	166-203
SPECIAL ORDERS	204-207
INDEX	208-214

SUSTAINABILITY

Sustainability is at the core of everything that we are and do. Like all responsible manufacturers we are dedicated to making a sustainable future possible.

With our specialist long-term partners we've worked hard to develop a culture of environmental awareness and mindset of sustainable operation to continually reduce our carbon and waste footprint in order to achieve Net Zero.

Responsible & Transparent Progress Towards Net Zero

Our parent company Yankon Lighting is participating in the internationally recognised CDP (Carbon Disclosure Project) and are sharing data on their set goals on improving sustainability and environmental performance. To date this has resulted in a current score of C (2023), with plans already in action to move to B by 2027

As a business, they not only disclose to CDP but they have also completed a company wide **Ecovadis** evaluation in 2024 and scored the "Fast mover badge" – and have implemented a plan to achieve a Bronze Medal by 2027.

Planned and identified ways Yankon Lighting intend to take positive action to achieve both of the above over the next 2 years:

- Replace high consumption equipment with low consumption alternatives
- Integrate equipment to use less machinery
- Optimise equipment
- Introduce smart lighting to the factory
- Introduce smart metering to monitor and track consumption
- · Increase our use of green energy

WORKING TOWARDS ACHIEVING NET ZERO

Starting from 1 September 2021, the Ecodesign Regulations and Energy Labeling Regulations were updated and the ultimate goal is to maintain a sustainable development in the lighting industry by a significant energy saving for lighting products and systems.

The Ecodesign Regulations (EU) 2019/2020

- Optimising the design of light sources and separated control gear for more sustainability and efficiency
- All products that failed to meet these regulatory requirements have been phased out
- Lighting installation will have to be renovated with new energy-efficient light sources

The Energy Labelling Regulation - empowerment through information

- Introduce a new energy label to empower end users to choose energy efficient products
- New scale reflects how efficient a product is - the definition of A to G will change based on new efficiency requirements.

	TOTAL .
Old	Lm/W
A**	120
A ⁺	65
Α	50
В	15
С	12
D	9
Е	0

New	Lm/W
Α	210
В	185
C	160
D	135
E	110
F	85
G	0

At the core of everything we are and do

Rigorous Quality and Management Systems

All MEGAMAN® products are designed, tested and produced in our own factories in Xiamen, China. Standards have been implemented factory-wide to ensure the MEGAMAN® manufacturing processes deliver innovative, reliable and safe products with high-quality standards now and in the future.

To ensure that MEGAMAN® products comply with the highest quality standards, company manufacturing plants are equipped with their own assembly lines.

The MEGAMAN® business runs under the most stringent management and quality systems. The green elements of the production process are maximised, employee welfare is prioritised and the company is socially responsible to the local community. To continually develop these areas, MEGAMAN® has undertaken a range of international accreditations. These include:

Quality Management System

MEGAMAN® UK Ltd operate an accredited ISO 9001:2015 quality management system.

Product Quality Assurance

MEGAMAN* lamps and luminaires are made using premium quality materials and innovative technologies within stringent control measures, to deliver maximum performance and energy efficiencies.













Innovative and Unique Lighting Products

With our patented LED design and technology, the MEGAMAN* LED luminaires and lamps are able to deliver superb performance, including low power consumption, excellent light output and low maintenance costs. They provide the highest quality lighting performance of any LED based product on the market consuming the same power!

Entering a New Era in LED Lighting and Luminaire Solutions

Unique Features

- Energy efficient replacement for traditional metal halide, CFL, halogen and incandescent luminaires
- Deliver superb lighting performance
- High luminous efficacy up to 210lm/W
- High lumen maintenance: rated lumen maintenance of 70% (L70) at up to 50,000 hours life
- High colour rendering up to Ra97
- High colour temperature consistency
- Long rated life up to 50,000 hours
- Simple installation and servicing
- High energy savings
- · No UV and IR radiation

Additional Benefits

- Mercury-free
- Instant start-up
- Wide range of operating temperatures

Applications

- Hospitality
- Retail lighting
- Offices
- Residential
- Decorative
- Industrial
- Outdoor



ON-SITE WARRANTY

MEGAMAN® 2 Year On-Site Warranty

In the event that a product covered by the 2 year On-Site Warranty fails within 2 years of the purchase date MEGAMAN® will, where possible, authorise the installer to replace the failed product and reimburse fair and reasonable costs. In the event that an agreement can not be reached, MEGAMAN® engineers will carry out the repair or replacement.





The warranty shall be void in the following circumstances:-

- Non-compliance with installation and safety regulations given in the installation instructions
- Modification or repair of any product by the installer, end user or anyone unauthorised to do so
- Improper use or installation, damage by accident or neglect, of any product by the installer, end user or any third party
- If the product is operated outside of the stated operating temperature of the lamp or luminaire.



2 Year On-Site Warranty



Weatherproof Integrated LED Batten with Single and Dual Lumen Output

Go to Page 56 for full details on the HAGON IP66 Weatherproof Batten range





ESSENTIALS ROCCA IP65 BATTEN

IP65 Weatherproof Integrated LED Batten with Single and Twin Output, Emergency and MS

Go to Pages 48 for full details on the ROCCA range of IP65 Weatherproof LED Battens







ESSENTIALS

BERTO BACKLIT TPa UGR<19 LED PANEL

UGR<19 Square and Rectangular Backlit TPa LED Panels with Non-Dimming Driver

Go to Page 18 for full details on BERTO BACKLIT TPa LED Panels





MEGAMAN®

Performa

MEGAMAN®

ssentials

WE'RE HERE FOR YOU!

It's simple. We want to be your trusted and long-term partner in providing innovative, energy saving, and affordable LED lighting solutions.

With over 30 years of experience in developing innovative, energy-saving lighting solutions, we consistently meet the industry's demand for reliable, affordable, and sustainable products. These expertise and experience has allowed us to make better decisions, react quickly, and stay ahead, making us the ideal partner for all UK wholesaler businesses.



EXTENSIVE RANGE OF ENERGY EFFICIENT & RELIABLE LED PRODUCTS



Highest levels of Customer Service & Support

A TRUSTED CUSTOMER SERVICE THAT'S DESIGNED TO ALWAYS DELIVER



























MEGAMAN® XChange®

A conscious decision to be the leaders in sustainable and affordable lighting solutions

As a global leader in LED lighting manufacturing, we bring decades of experience and a deep-rooted dedication to energy efficiency and sustainability. This commitment drives us to continuously innovate, developing cutting-edge lighting technologies that shape the future while delivering practical, cost-effective solutions to enhance energy savings and minimise waste.





Our focus on environmentally conscious lighting has led to the development of the XChange® patented eco-design range — modular LED fixtures that offer the perfect balance of safety, sustainability, and high efficiency.

The future of lighting is here.

It's MEGAMAN® XChange®.



NEW RENZO XCHANGE & FONDA XCHANGE flexible plug-andplay Eco-design bulkheads with replaceable light source















Innovative & Sustainable Lighting Solution





EFFORTLESS, SUSTAINABLE LIGHTING MAINTENANCE

With our innovative XChange™ LED module design, maintaining your lighting has never been easier or more cost-effective. Instead of replacing complete fiftings, you can quickly swap out the entire XChange™ module in just 10 seconds—no tools, no rewiring. This approach not only saves time but also reduces long-term costs.



EXTENDED LIFESPAN AND LESS WASTE

Our MEGAMAN® XChange™ LED modules are designed for longevity. When the light source eventually reaches the end of its life, you only need to replace the module, not the entire fixture. This helps to minimize waste and supports a more sustainable, circular approach to lighting.



VERSATILE AND REUSABLE

The XChange™ module is compatible with a wide range of MEGAMAN® fixtures, from different series and generations, ensuring seamless integration across your lighting system. This means you can re-purpose your existing luminaires without needing to replace everything, reducing both costs and waste.



EASY UPGRADES AND FUTURE-PROOFING

As LED technology evolves, upgrading to more efficient modules is simple. There's no need to replace the entire fixture—just swap out the module to stay up to date with the latest advancements, reducing the need for new products and supporting sustainability.



New



MINIMISED DOWNTIME AND HASSLE-FREE MAINTENANCE

For professional settings, quick and easy module replacement minimizes downtime. This is especially useful for property management, where efficiency and minimal disruption are key.





TAILOR TO YOUR NEEDS

With a variety of XChange™ LED modules to choose from, you can easily customize your lighting to suit different applications and environments, ensuring the perfect lighting solution for any space.

practical, sustainable & cost effective

lighting

solutions



SUSTAINABLE AND COMPLIANT

With growing emphasis on repairability in lighting projects, our replaceable light source modules meet the latest sustainability standards and regulatory requirements, ensuring you stay compliant while contributing to a more sustainable future.

By focusing on reusing, recycling, and re-purposing components, our solutions are built to help you reduce waste, save energy, and create a more sustainable future for us all.

IP RATING

What is IP?

An IP rating is shorthand for an Ingress Protection mark. An IP rating is usually a two-digit grading system that relates to the degree of protection the lighting fixture or luminaire provides against solid object, dust and water ingress.

The higher the IP rating number, the better the protection offered will generally be.

In the UK, IP codes are assigned in accordance with British Standard BS EN 60529:1992. In Europe, they fall in line with IEC standard 60509:1989, and internationally they conform to EN 60529 certification.

IP rating relate to three key metrics:

- Resistance to ingress, accidental or otherwise, by the user
- Resistance to ingress from foreign bodies (dust, dirt etc)
- · Resistance to moisture/water ingress











FOR EXPERT HELP AND ALL THE INFORMATION YOU NEED FOR SELECTING THE RIGHT LIGHTING FIXTURE FOR YOU. CONTACT YOUR LOCAL MEGAMAN® BDM



Ingress Protection (IP) Rating

IP65

SOLID OBJECT & DUST

WATER

1

>50mm Protected against a solid object such as back of hand. No protection against deliberate contact

2

>12.5mm Protected against a solid object such as a finger

3

>2.5mm Protected against a solid object such as tools and thick wire

4

>1mm Protected against a solid object such as tools, most wires, nails, and screws

5

Dust protected Limited ingress of dust permitted. Will not interfere with operation of the equipment

6

Dust tight No ingress of dust; full protection against dust and other particulates

Dripping Water Protected against vertical drops of water. Limited ingress permitted

2

Dripping Water (tilted) Protected against water droplets when tilted up to 15 degrees from vertical

3

Spraying Water Protected against water spray from all directions up to angle of 60 degrees from vertical

4

Splashing Water Protected against water splashes from all directions

5

Water Jets Protection against low pressure jets of water from any direction

6

Powerful Water Jets Protection against high pressure jets of water from any direction

7

Watertight Full Immersion Watertight protection from full immersion in water up to 1m for 30 minutes

8

Vatertight Full Immersion Watertight protection from full immersion in water under defined conditions for long periods of time

KNOW YOUR IP RATING

Written as IPXX, the first X defines the level of protection provided from the ingress of dust or solid objects. The second X defines the level of protection against harmful ingress of water.

IK RATING

What is IK?

An IK rating is a number comprised of 2 digits used to provide an indication of a product's resistance to damage from an impact. The rating scale is from 00 to 10, indicating the amount of protection provided by an electrical enclosure (including luminaires) against an impact.

General figures:

IKO4 rated products are protected against 0.5 joules of impact, which is the approximate equivalent of a 0.25kg mass being dropped from 200mm.

IKO7 rated products are protected against 2 joules of impact. This is equivalent to a 0.5kg mass being dropped from 400mm.

IKO8 rated products are protected against 5 joules of impact. This is the equivalent of a 1.7kg mass being dropped from 300mm.

IKO9 rated products are protected against 10 joules of impact, which is the equivalent of a 5kg mass being dropped from 200mm.

IK10 rated products are protected against 20 joules of impact, which is the equivalent of a 5kg mass being dropped from 400mm.



NEW IK08 & IP65 HERA flexible bulkhead with 3 different frame design options in 1 box. Page 78



TPa & TPb

MEGAMAN® Thermoplastic (TP) diffusers: Helping you make a more informed choice

Making the choice between TP(a) and TP(b) panels? It's an important decision, and one that comes down to some fine details. While the differences between the two are subtle, they can have a big impact on the performance of your lighting system. Here we give you the lowdown on each type, along with the key differences you'll want to keep in mind.

Let's start with TP. It stands for Thermoplastic, a term used to describe the material's flammability characteristics, which are vital when selecting the right product for your setup. Common thermoplastic materials include polycarbonate (PC), acrylic (PMMA), and polystyrene (PS). The TP rating becomes a key consideration when the diffuser is part of the ceiling structure or penetrates the ceiling barrier. If the product is surface - mounted or suspended, the TP rating doesn't tend to play much of a role.


TP(a) usually relates to any polycarbonate diffuser thicker than 3mm. That's also true for materials that self-extinguish within 5 seconds after a flame is removed. TP(a)

panels are generally unrestricted in most uses, with the exception of protected stairways and fire-resistant exit routes.

One thing to bear in mind: TP(a) panels can impact light output or beam angle due to the thickness of the diffuser. So, while they're fire-safe, you might lose out a bit on performance when compared to TP(b) panels.

Speaking of TP(b), these panels do come with a few more restrictions. There are specific rules about how they're spaced and how many can be installed in a given room. For instance, groups of recessed TP(b) panels can't exceed 5m, and you need a 3m gap between each panel group. Plus, they must not burn faster than 50mm per minute. On the flip side, TP(b) panels actually improve light output and beam angle compared to TP(a) panels. Take Megaman's BERTO panels, for example: TP(a) panels have a 90° beam angle, while TP(b) panels offer a wider 110° beam angle.

While most lighting designers tend to favour TP(a) due to current spacing guidelines, both TP(a) and TP(b) panels have their own distinct advantages. So, it really comes down to the specifics of your project and what works best for your needs and budget.

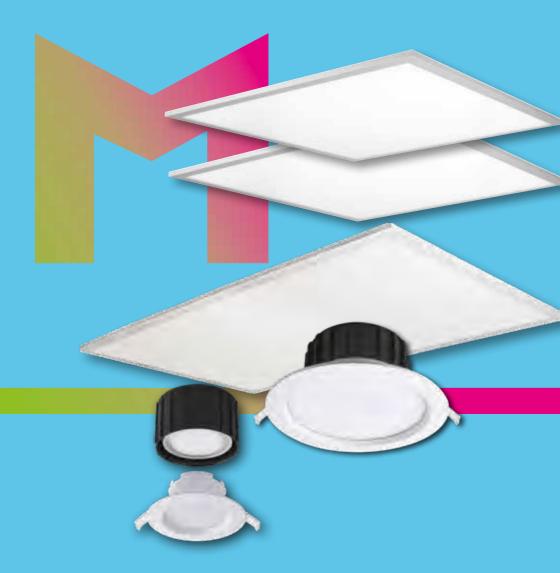





LED PANELS

MEGAMAN®
Performa and
Essentials LED
panel solutions
are easy and
quick to install
and come with a
generous 5 Year
Warranty on
both panel and
driver.

Ideal for offices, retail, education and a wide range of commercial environments and applications









BERTO BACKLIT TPa



















Applications

- Conference rooms
- Offices
- Classrooms
- Corridors



Loop through wiring adaptor



Features & Benefits

- UGR<19
- SQUARE & RECTANGULAR **VERSIONS AVAILABLE**
- 4000K AND 6500K
- UP TO 5000 LUMENS
- UP TO 116LM/W
- 50,000 HOURS
- 5 YEAR WARRANTY

- IP40
- · 5 Year warranty on panel & driver
- · 2 Year On-Site Warranty
- · Surface & suspension mounting kits available separately
- · Perfect for shallow ceiling voids
- · Quick & easy installation
- · Lightweight LED panel with non discolouring TPa rated diffusers
- Suitable for use in exposed T-grid ceilings
- Flicker free <3%
- · Long maintenance period and low lumen depreciation
- · Flexible loop in/loop out function



600x600 BERTO BACKLIT TPa

UGR<19 INTEGRATED LED PANEL with Non-Dimming Driver





UGR19

UGR19

4000K 100 LM/W



IP40





_	∐ 33mm	
	33mm	

Code
710675

Description	
UGR19 BACKLIT TPa (SQUARE	=)
PANEL WITH DRIVER - 2 PAC	K

Watts 36W

4000K

Lumens 3600 Beam Angle 90° Hrs Life 50,000

ACCESSORIES AVAILABLE - PAGE 27













595mm 33mm

Code 710676

6	UGR19 BACKLIT TPa (SQUARE)
	PANEL WITH DRIVER - 2 PACK

 Watts
 K
 Lumens
 Beam Angle
 Hrs Life

 36W
 6500K
 3600
 90°
 50,000

ACCESSORIES AVAILABLE - PAGE 27

Description

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +45°C

Cost effective

Backlit LED panels

that deliver reliable

Flicker Free and

UGR<19 low glare

performance

Photometric data: Please refer to our wates for up to a content of the content



1200x600 BERTO BACKLIT TPa

UGR<19/UGR<22 INTEGRATED LED PANEL with Non-Dimming Driver







5YR WARRANT

4000K 100 LM/W

50.000

HRS


2YR



IP40







Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711081	UGR19 BACKLIT TPa (RECTANGULAR) PANEL WITH DRIVER	50W	4000K	5000	90°	50,000

ACCESSORIES AVAILABLE - PAGE 27





5YR WARRANT





HRS



IP40



895mm

1195mm 33mm

Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711082	UGR22 BACKLIT TPa (RECTANGULAR) PANEL WITH DRIVER	43W	6500K	5000	110°	50,000

ACCESSORIES AVAILABLE - PAGE 27

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30 °C to +45 °C



SCAN THE QR CODE FOR MORE INFORMATION



Photometric data: Please refer to our website for up to date photometric information.















MILENA





























Applications

- · Retails
- Bathrooms
- Hotels
- Kitchens
- Offices
- Restaurants



MILENA's modular design allows quick and easy install and maintenance



Features & Benefits

- 6.5W-23W
- SELECTABLE 2 CCT
- DUAL LUMEN OUTPUT
- UP TO 2400LM

- UP TO 104LM/W
- 2 PANEL SIZES
- 50,000 HOURS
- 5 YEAR WARRANTY
- Round LED panel unit consists of dual-lumen output and dual-CCT LED light engine with reflector or diffuser module available on certain models
- Switchable CCT of warm 3000K or cool 4000K light
- Built-in driver
- Flicker free ≤3%
- · Emergency available
- Total control and flexibility from Milena modular downlight system is ideal for retrofit in existing conventional installations and their ceiling cut-outs
- · Tool-less install allows for quick install and maintenance
- · Wide and uniform light distribution



MILENA 4"
SELECTABLE WATTAGE, LUMEN OUTPUT & 2 CCT
Round Modular Integrated LED Panel





















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
710709	4" ROUND LED PANEL WITH SELECTABLE DUAL CCT & DUAL LUMEN OUTPUT	6.5W/9W	3000K/ 4000K	560/770 (3000K) 600/830 (4000K)	100°	50,000

ACCESSORIES AVAILABLE - PAGE 27

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

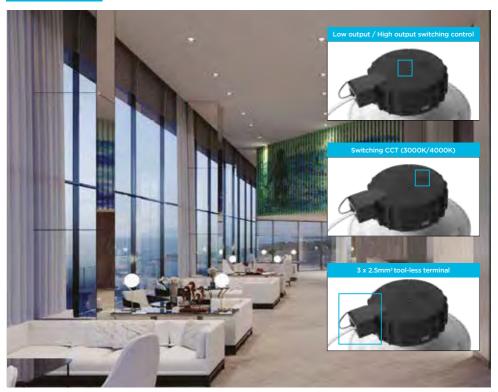



MILENA 6"

SELECTABLE WATTAGE, LUMEN OUTPUT & 2 CCT Round Modular Integrated LED Panel





Description



5YR WARRANT



50.000

HRS









Ø172mm

Code 710689

6" ROUND LED PANEL WITH SELECTABLE DUAL CCT & **DUAL LUMEN OUTPUT**

18W/23W

Watts

3000K/ 4000K

IP54

1670/2140 (3000K) 1800/2300 (4000K)

Beam Angle Hrs Life 100° 50,000

ACCESSORIES AVAILABLE - PAGE 27

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

Lumens



Description

WATTAG

WARRANT




HRS









Ø172mm

Code 710692

6" ROUND LED PANEL WITH FACET REFLECTOR SELECTABLE DUAL CCT & **DUAL LUMEN OUTPUT**

18W/23W

Watts

3000K/ 4000K

1670/2230 (3000K) 1800/2400 (4000K)

Beam Angle Hrs Life 90° 50,000

ACCESSORIES AVAILABLE - PAGE 27

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

Lumens



ACCESSORIES | LED PANELS

ESSENTIALS BERTO BACKLIT TPa UGR19 LED PANEL



710502BACKLIT Emergency Kit for Backlit panels with Connectors



50W Dimmable LED Driver



710941 37W DALi 2 Dimming Driver



Loop Through
Junction Box with
3 Pin



711048 Self-Test Emergency Kit



Y Type Suspension Kit for Panel



Surface Mounted Frame 600x600x64mm

Surface Mounted Frame 1200x600x64mm

PERFORMA MILENA ROUND LED PANEL



Emergency Module





LED BATTENS

MEGAMAN[®] flexible range of quick and easy to install integrated LED battens are ideal for a wide range of retail, commercial. educational and industrial applications & environments.







OUTPUT. MS & EMG OPTIONS



MS & EMG OPTIONS







EMERGENCY & MS



WEATHERPROOF BATTEN









essentials





TONO 3

















5YR WARRANTY



TRI-WATTAGE & 4 CCT CONTROL

Easy access and control of Wattage, Lumen and Colour Temperature

Applications

- · Residential lighting
- · Under cabinet
- Staircases
- Corridors
- Factories
- Warehouse

Features & Benefits

- SELECTBLE 4 CCT
- TRI-LUMEN OUTPUT
- 3 SELECTABLE WATTAGES
- UP TO 7500 LUMENS
- UP TO 135LM/W
- 5 LENGTHS AVAILABLE
- 50,000 HOURS
- 5 YEAR WARRANTY



UK BESA box compatible

- IP20
- New MEGAMAN® TONO 3 is an integrated LED batten, and is an ideal alternative to T5 and T8 fluorescent fittings
- Tri-Wattage and 4 CCT switchable offers a variety of applications and flexibility
- · BESA box compatible
- · Flicker free
- · Available in 2ft, 3ft, 4ft, 5ft and 6ft lengths
- · Enhancing efficacy up to 135lm/W
- · Long maintenance period and low lumen depreciation

MEGAMAN®
Performa



TONO 3 | IP20

SELECTABLE WATTAGE & LUMEN OUTPUT & 4 CCT Integrated LED Indoor Batten






















Code	Description	Watts	K	Lumens	LM/W	Beam Angle	Hrs Life
712287	2FT SLIM INDOOR BATTEN WITH SELECTABLE CCT, LUMEN OUTPUT AND WATTAGE	10W/ 15W/ 20W	3000K 4000K 5000K 6500K	10W 1200lm [3000K] 15W 1730lm [3000K] 20W 2200lm [3000K] 10W 1250lm [4000K] 15W 1850lm [4000K] 10W 1250lm [5000K] 10W 1250lm [5000K] 15W 1850lm [5000K] 20W 2400lm [5000K] 10W 1200lm [6500K] 15W 1730lm [6500K] 20W 2200lm [6500K]	120 115 110 125 123 120 125 123 120 120 120 115 110	110°	50,000

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30 °C to +40 °C

























Code	Description	Watts	K	Lumens	LM/W	Beam Angle	Hrs Life
712288	3FT SLIM INDOOR BATTEN WITH SELECTABLE CCT, LUMEN OUTPUT AND WATTAGE	15W/ 20W/ 30W	3000K 4000K 5000K 6500K	15W 1800lm [3000K] 20W 2300lm [3000K] 30W 3300lm [3000K] 15W 1950lm [4000K] 20W 2500lm [4000K] 30W 3600lm [4000K] 15W 1950lm [5000K] 20W 2500lm [5000K] 30W 3600lm [5000K] 15W 1800lm [6500K] 20W 2300lm [6500K] 30W 3300lm [6500K]	120 115 110 130 125 120 130 125 120 120 115 110	110°	50,000



TONO 3 | IP20

SELECTABLE WATTAGE & LUMEN OUTPUT & 4 CCT Integrated LED Indoor Batten






















Code	Description	Watts	K	Lumens	LM/W	Beam Angle	Hrs Life
712289	4FT SLIM INDOOR BATTEN WITH SELECTABLE CCT, LUMEN OUTPUT AND WATTAGE	20W/ 30W/ 40W	3000K 4000K 5000K 6500K	20W 2400lm [3000K] 30W 3450lm [3000K] 40W 4400lm [3000K] 20W 2700lm [4000K] 30W 3900lm [4000K] 40W 5000lm [4000K] 20W 2700lm [5000K] 30W 3900lm [5000K] 40W 5000lm [5000K] 20W 2500lm [6500K] 30W 3600lm [6500K] 40W 4600lm [6500K]	120 115 110 135 130 125 135 130 125 125 125 125 120 115	110°	50,000
			6500K	30W 3900lm [4000K] 40W 5000lm [4000K] 20W 2700lm [5000K] 30W 3900lm [5000K] 40W 5000lm [5000K] 20W 2500lm [6500K] 30W 3600lm [6500K]	130 125 135 130 125 125 120		

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30 °C to +40 °C




















Code	Description	Watts	K	Lumens	LM/W	Beam Angle	Hrs Life	
712290	5FT SLIM INDOOR BATTEN WITH SELECTABLE CCT, LUMEN OUTPUT AND WATTAGE	30W/ 40W/ 50W	3000K 4000K 5000K 6500K	30W 3600lm [3000K] 40W 4600lm [3000K] 50W 5500lm [3000K] 30W 4050lm [4000K] 40W 5200lm [4000K] 50W 6250lm [4000K]	120 115 110 135 130 125	110°	50,000	
				30W 4050lm [5000K] 40W 5200lm [5000K] 50W 6250lm [5000K] 30W 3750lm [6500K] 40W 4800lm [6500K] 50W 5750lm [6500K]	135 130 125 125 120 115			

BATTENS



TONO 3 | IP20

SELECTABLE WATTAGE & LUMEN OUTPUT & 4 CCT Integrated LED Indoor Batten






















Code	Description	Watts	K	Lumens	LM/W	Beam Angle	Hrs Life
712291	6FT SLIM INDOOR BATTEN WITH SELECTABLE CCT, LUMEN OUTPUT AND WATTAGE	40W/ 50W/ 60W	3000K 4000K 5000K 6500K	40W 4800lm [3000K] 50W 5750lm [3000K] 60W 6600lm [3000K] 50W 5400lm [4000K] 50W 6500lm [4000K] 60W 7500lm [4000K] 50W 6500lm [5000K] 50W 6500lm [5000K] 60W 7500lm [6500K] 50W 6000lm [6500K] 60W 6900lm [6500K]	120 115 110 135 130 125 135 130 125 125 125 125 120 115	110°	50,000

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30 °C to +40 °C





SCAN THE OR CODE FOR MORE INFORMATION



Photometric data: Please refer to our website for up to date photometric information.



GARRON



















Applications

- Residential lighting
- Schools
- Factories
- Corridors
- Warehouses

Features & Benefits

- SINGLE & TWIN OUTPUT
- FLICKER FREE
- EMERGENCY & MS OPTIONS
- UP TO 7800 LUMENS
- UP TO 120LM/W
- 2FT,4FT, 5FT & 6FT LENGTHS
- 30,000 HOURS
- 3 YEAR WARRANTY
- · IP20 and IK08 rating
- MEGAMAN® GARRON is a flexible economy range of everyday LED batten, ideal replacement for conventional indoor battens
- Easy installation and tool-less wiring
- BESA box compatible
- · Flicker free
- · Available in 4 different lengths in both Single and Twin Output
- · Enhancing efficacy up to 120lm/W
- · Long maintenance period and low lumen depreciation

MEGAMAN®





SINGLE & TWIN OUTPUT
Integrated LED Indoor Batten







SCAN THE OR CODE FOR MORE INFORMATION



Photometric data: Please refer to our website for up to date photometric information.



2FT SINGLE OUTPUT STANDARD, EMERGENCY & MS Integrated LED Indoor Batten

















620mm



Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711338	2FT SINGLE OUTPUT INDOOR BATTEN	10W	4000K	1200	110°	30,000


















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712065	2FT SINGLE OUTPUT INDOOR BATTEN WITH EMERGENCY KIT	11W	4000	1200	110°	30,000















-	620r	nm	65mm
	Lumens	Beam Angle	Hrs Life

a real f

Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711338-MS	2FT SINGLE OUTPUT INDOOR BATTEN WITH MICROWAVE SENSOR	11W	4000K	1200	110°	30,000



2FT TWIN OUTPUT STANDARD, EMERGENCY & MS Integrated LED Indoor Batten



















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711334	2FT TWIN OUTPUT INDOOR BATTEN	17W	4000K	2040	110°	30,000

















code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712061	2FT TWIN OUTPUT INDOOR BATTEN WITH EMERGENCY KIT	18W	4000K	2040	110°	30,000















Code	Description	Mr. H.	, , , , , , , , , , , , , , , , , , ,	1	December 1	H 126-
			<u> </u>	620n	nm	65mm

Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711334-MS	2FT TWIN OUTPUT INDOOR BATTEN WITH MICROWAVE SENSOR	18W	4000K	2040	110°	30,000



GARRON | IP20

4FT SINGLE OUTPUT STANDARD, EMERGENCY & MS Integrated LED Indoor Batten



















			4mr
-	1200mm	65mm	Ó

Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711339	4FT SINGLE OUTPUT INDOOR BATTEN	20W	4000K	2400	110°	30,000



















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
7120	4FT SINGLE OUTPUT INDOOR BATTEN	21W	4000K	2400	110°	30,000
	WITH EMERGENCY KIT					















1200mm



Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711339-MS	4FT SINGLE OUTPUT INDOOR BATTEN WITH MICROWAVE SENSOR	21W	4000K	2400	110°	30,000



4FT TWIN OUTPUT STANDARD, EMERGENCY & MS Integrated LED Indoor Batten





























Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711335	4FT TWIN OUTPUT INDOOR BATTEN	40W	4000K	4800	110°	30,000


















ı	Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
Ī	712062	4FT TWIN OUTPUT INDOOR BATTEN	41W	4000K	4800	110°	30,000
L		WITH EMERGENCY KIT					















1200	65mm	v	
Lumens	Beam Angle	Hrs Life	

Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711335-MS	4FT TWIN OUTPUT INDOOR BATTEN WITH MICROWAVE SENSOR	41W	4000K	4800	110°	30,000

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +50°C

ı eniệ



GARRON | IP20

5FT SINGLE OUTPUT STANDARD, EMERGENCY & MS **Integrated LED Indoor Batten**























Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711340	5FT SINGLE OUTPUT INDOOR BATTEN	30W	4000K	3600	110°	30,000



Description

5FT SINGLE OUTPUT INDOOR BATTEN

















1500mm



WITH EMERGENCY KIT





Watts


31W











Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711340-MS	5FT SINGLE OUTPUT INDOOR BATTEN WITH MICROWAVE SENSOR	31W	4000K	3600	110°	30,000

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +50°C

Code

712067



5FT TWIN OUTPUT STANDARD, EMERGENCY & MS Integrated LED Indoor Batten




















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711336	5FT TWIN OUTPUT INDOOR BATTEN	60W	4000K	7200	110°	30,000











IP20







	Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
Γ	712063	5FT TWIN OUTPUT INDOOR BATTEN	61W	4000K	7200	110°	30,000
		WITH EMERGENCY KIT					



TWIN OUTPUT











-	1500mm	65m

Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711336-MS	5FT TWIN OUTPUT INDOOR BATTEN WITH MICROWAVE SENSOR	61W	4000K	7200	110°	30,000



GARRON | IP20

6FT SINGLE OUTPUT STANDARD, EMERGENCY & MS Integrated LED Indoor Batten





















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711341	6FT SINGLE OUTPUT INDOOR BATTEN	40W	4000K	4800	110°	30,000


















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712068	6FT SINGLE OUTPUT INDOOR BATTEN WITH EMERGENCY KIT	41W	4000K	4800	110°	30,000

















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711341-MS	6FT SINGLE OUTPUT INDOOR BATTEN WITH MICROWAVE SENSOR	41W	4000K	4800	110°	30,000



6FT TWIN OUTPUT STANDARD, EMERGENCY & MS Integrated LED Indoor Batten



















-	1800mm	65mm	•

Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711337	6FT TWIN OUTPUT INDOOR BATTEN	65W	4000K	7800	110°	30,000

























Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
, · · ·	6FT TWIN OUTPUT INDOOR BATTEN WITH EMERGENCY KIT	66W	4000K	7800	110°	30,000

















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711337-MS	6FT TWIN OUTPUT INDOOR BATTEN WITH MICROWAVE SENSOR	66W	4000K	7800	110°	30,000



GARRON 2





















Applications

- · Car parks
- Warehouses
- Stairwells
- Corridors
- Patios

Features & Benefits

- SELECTABLE LUMEN OUTPUT
- SELECTABLE 3 CCT
- UP TO 10080 LUMENS
- UP TO 130LM/W

- AVAILABLE IN 2FT, 4FT, 5FT **& 6FT LENGTHS**
- 50,000 HOURS
- 5 YEAR WARRANTY
- New MEGAMAN® GARRON 2 is a high-performance indoor LED batten with option of a plug-and-play microwave sensor and 3 hour emergency kit. Providing an ideal flexible solution to replace conventional indoor battens
- · Easy installation and tool-less wiring
- Flicker free
- · 3-direction cable inlet design
- · Enhancing efficacy up to 130lm/W
- Long maintenance period and low lumen depreciation

MEGAMAN®

Performa



GARRON 2 | IP20 SELECTABLE LUMEN OUTPUT & 3 CCT Integrated LED Indoor Batten





















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712206	2FT INDOOR BATTEN WITH 3 CCT AND SELECTABLE LUMEN OUTPUT	10W/20W	3000K/4000K/ 6500K	1300/ 2400	110°	50,000

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +50°C






















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712207	4FT INDOOR BATTEN WITH 3 CCT AND SELECTABLE LUMEN OUTPUT	20W/40W	3000K/4000K/ 6500K	2600/ 4800	110°	50,000

ACCESSORIES



712210 GARRON 2 Sensor Module



712211 GARRON 2 Self-Test Emergency Module



SCAN THE QR CODE FOR MORE INFORMATION



Please refer to our website for up to date photometric information.



GARRON 2 | IP20 SELECTABLE LUMEN OUTPUT & 3 CCT Integrated LED Indoor Batten






















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712208	5FT INDOOR BATTEN WITH 3 CCT AND SELECTABLE LUMEN OUTPUT	30W/60W	3000K/4000K/ 6500K	3900/ 7200	110°	50,000

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +50°C



























Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712209	6FT INDOOR BATTEN WITH 3 CCT AND SELECTABLE LUMEN OUTPUT	42W/84W	3000K/4000K/ 6500K	5460/ 10080	110°	50,000

ACCESSORIES AVAILABLE

ACCESSORIES



712210 GARRON 2 Sensor Module



712211 GARRON 2 Self-Test Emergency Module



SCAN THE QR CODE FOR MORE INFORMATION



otometric data: Please refer to our website for up to date photometric information.







Integrated LED Indoor Batten with Selectable Wattages, 3 CCT and Dual Lumen Output. Emergency and Microwave Sensor options available. BESA box compatible.



ROCCA

























Applications

- · Car parks
- Warehouses
- Stairwells
- Corridors
- Patios

Features & Benefits

- SINGLE & DUAL OUTPUT
- IP65 WEATHERPROOF
- BESA BOX COMPATIBLE
- **UP TO 9100 LUMENS**
- UP TO 130LM/W
- EMERGENCY & MS OPTIONS
- 40,000 HOURS
- 3 YEAR WARRANTY
- MEGAMAN® ROCCA is a flexible economy range of reliable everyday LED battens. An ideal replacement for traditional waterproof battens & fluorescent lamps
- · Emergency Kit and Microwave Sensor options available
- · Easy installation and tool-less wiring
- Flicker free
- · Vandal resistant IK08 rating
- Available in 3 different lengths in both Single and Dual Output and both Emergency and MS versions
- · Enhancing efficacy up to 130lm/W
- · Long maintenance period and low lumen depreciation
- · 2 Year On-Site Warranty





ROCCA IP65

4FT SINGLE OUTPUT STANDARD, EMERGENCY & MS Weatherproof Integrated LED Batten

























Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711345	4FT SINGLE OUTPUT WEATHERPROOF IP65 BATTEN	20W	4000K	2500	110°	40,000





















76mm

Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711345-EMG	4FT SINGLE OUTPUT EMERGENCY WEATHERPROOF IP65 BATTEN	21W	4000K	2500	110°	40,000





















	Lumens	Beam Angle	Hrs Life
,	0500	****	40.000

Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711345-MS	4FT SINGLE OUTPUT MICROWAVE SENSOR IP65 BATTEN	21W	4000K	2500	110°	40,000



ROCCA | IP65

5FT SINGLE OUTPUT STANDARD, EMERGENCY & MS Weatherproof Integrated LED Batten

















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711346	5FT SINGLE OUTPUT WEATHERPROOF IP65 BATTEN	28W	4000K	3600	110°	40,000






















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711346-EMG	5FT SINGLE OUTPUT EMERGENCY WEATHERPROOF IP65 BATTEN	29W	4000K	3600	110°	40,000

















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711346-MS	5FT SINGLE OUTPUT MICROWAVE	29W	4000K	3600	110°	40,000
	SENSOR IP65 BATTEN					



ROCCA | IP65

6FT SINGLE OUTPUT STANDARD, EMERGENCY & MS Weatherproof Integrated LED Batten





























Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711347	6FT SINGLE OUTPUT WEATHERPROOF IP65 BATTEN	34W	4000K	4200	110°	40,000





















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712120	6FT SINGLE OUTPUT EMERGENCY WEATHERPROOF IP65 BATTEN	35W	4000K	4200	110°	40,000



















	A	E
		86mm
4		
	148mm	

Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711347-MS	6FT SINGLE OUTPUT MICROWAVE SENSOR IP65 BATTEN	35W	4000K	4200	110°	40,000



ROCCA | IP65

4FT DUAL OUTPUT STANDARD, EMERGENCY & MS Weatherproof Integrated LED Batten



























-			_	7
			127	'n

12	70mm	10

coue	Description	Mqff2	N	Luillells	Bediii Aligie	HI2 FII6
711342	4FT DUAL OUTPUT WEATHERPROOF IP65 BATTEN	40W	4000K	4800	110°	40,000






















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life	
712069	4FT DUAL OUTPUT EMERGENCY WEATHERPROOF IP65 BATTEN	41W	4000K	4800	110°	40,000	



















1270mm



Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711342-MS	4FT DUAL OUTPUT MICROWAVE	41W	4000K	4800	110°	40,000
	SENSOR IP65 BATTEN					



ROCCA | IP65

5FT DUAL OUTPUT STANDARD, EMERGENCY & MS Weatherproof Integrated LED Batten





















Beam Angle

110°



Hrs Life

40,000

Description
5FT DUAL OUTPUT WEATHERPROOF IP65 BATTEN



Watts



4000K



Lumens

6800
























Code	Description	Watts	K	Lumens	
712070	5FT DUAL OUTPUT EMERGENCY	60W	4000K	6800	
	WEATHERPROOF IP65 BATTEN				

6800	110°	40,000






















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711343-MS	5FT DUAL OUTPUT MICROWAVE SENSOR IP65 BATTEN	57W	4000K	6800	110°	40,000



ROCCA | IP65

6FT DUAL OUTPUT STANDARD, EMERGENCY & MS Weatherproof Integrated LED Batten





















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711344	6FT DUAL OUTPUT WEATHERPROOF	70W	4000K	9100	110°	40,000






















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712071	6FT DUAL OUTPUT EMERGENCY WEATHERPROOF IP65 BATTEN	71W	4000K	9100	110°	40,000



















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life	
711344-MS	6FT DUAL OUTPUT MICROWAVE SENSOR IP65 BATTEN	71W	4000K	9100	110°	40,000	

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30 °C to +50 °C







HAGON





























Applications

- · Car parks
- · Warehouses
- · Industrial areas
- Stairwells
- Corridors
- Underground areas

Features & Benefits

- SINGLE & DUAL OUTPUT
- FLICKER FREE
- IP66 & IK08 RATING
- UP TO 7000 LUMENS
- UP TO 140LM/W
- EMERGENCY & PIR SENSOR
- 50,000 HOURS
- 5 YEAR WARRANTY
- · Outdoor Integrated LED Batten with Opal diffuser
- · Concealed clip system
- Flicker free (flicker Ratio <3% @100Hz)
- Easy and flexible installation through sliding stainless steel clips. Enabling use of existing mounting holes to replace conventional light fittings
- Cable entries and through wiring allow for linear series connection
- Additional Live [L1, (L2), E, N] allows for connection of emergency kit and sensor; and also enables the forming of more than 1 group master/slave in PIR sensor module (710712), which operate independently of each other
- Ideal for harsh environments and applications
- · 2 Year On-Site Warranty



Performa



HAGON | IP66

SINGLE OUTPUT

Weatherproof Integrated LED Batten






















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711425	2FT SINGLE OUTPUT WEATHERPROOF IP66 BATTEN	17W	4000K	2380	120°/160° LAMBERTAIN	50,000

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30 °C to +50 °C



ACCESSORIES



710712 **HAGON & DINO 2** PIR Sensor



HAGON & DINO 2 **Emergency Kit**

5 Year Warranty on both PIR Sensor and Emergency Kit.

MFGAMAN® HAGON is designed to deliver consistent and reliable high performance lighting in the toughest of environments



SCAN THE OR CODE FOR MORE INFORMATION



Please refer to our website for up to date photometric



HAGON | IP66

SELECTABLE DUAL LUMEN OUTPUT Weatherproof Integrated LED Batten
























Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711426	4FT DUAL OUTPUT AND DUAL LUMEN WEATHERPROOF IP66 BATTEN	17W/33W	4000K	2380/ 4600	120°/160° LAMBERTAIN	50,000

ACCESSORIES AVAILABLE

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +50°C

ACCESSORIES



710712 HAGON & DINO 2 PIR Sensor



711102 HAGON & DINO 2 Emergency Kit

5 Year Warranty on both PIR Sensor and Emergency Kit.



SCAN THE QR CODE FOR MORE INFORMATION



Photometric data: Please refer to our website for up to date photometric information.





HAGON XCHANGE®

































Applications

- · Car parks
- Warehouses
- Stairwells
- Corridors
- · Underground areas

Features & Benefits

REMOVE

- SINGLE & TWIN OUTPUT
- SELECTABLE 3 CCT
- IP66 & IK08 RATING
- UP TO 8200 LUMENS
- UP TO 122LM/W
- EMERGENCY & MS OPTIONS
- 70.000 HOURS
- 5 YEAR WARRANTY
- · Eco-design with replaceable light source
- · Compact and slim profile achieved by one-piece extruded diffuser, it guarantees 100% no water intrusion
- Dual Lumen Output in one luminaires, enhancing inventory flexibility
- Compatible with attachable PIR Sensor (710712), allowing to form a master and slave in lighting system
- Energy saving with efficacy up to 122lm/W
- Tool-less installation (loop-in/loop-out with push-in terminal)
- Compatible with 4 x 2.5mm² and 6 x 2.5mm² cable with M20 cable gland for ON/OFF and DALI version respectively
- · Flicker free





HAGON XCHANGE | IP66

SELECTABLE LUMEN OUTPUT AND 3 CCTWeatherproof Integrated LED Batten
























Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712509	2FT WEATHERPROOF IP66 BATTEN WITH SELECTABLE WATTAGE AND 3 CCT	9W/17W	3000K 4000K 6500K	1100/1850 (3000K) 1100/2000 (4000K/6500K)	120°	70,000

ACCESSORIES AVAILABLE

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +50°C

XCHANGE

ACCESSORIES



710712 HAGON & DINO 2 PIR Sensor



711102 HAGON & DINO 2 Emergency Kit

5 Year Warranty on both PIR Sensor and Emergency Kit.





SCAN THE QR CODE FOR MORE INFORMATION



Please refer to our website for up to date photometric information.



HAGON XCHANGE | IP66

SELECTABLE LUMEN OUTPUT AND 3 CCT Weatherproof Integrated LED Batten































1500mm

Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712511	5FT WEATHERPROOF IP66 BATTEN WITH SELECTABLE WATTAGE AND 3 CCT	33W/50W	3000K 4000K 6500K	3650/5500 (3000K) 4000/6000 (4000K/6500K)	120°	70,000

ACCESSORIES AVAILABLE







HAGON XCHANGE | IP66

SELECTABLE LUMEN OUTPUT AND 3 CCT Weatherproof Integrated LED Batten





















60mm		
60mm	1500mm	

Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712512	5FT WEATHERPROOF IP66 BATTEN WITH SELECTABLE WATTAGE AND 3 CCT	55W/68W	3000K 4000K 6500K	6000/7500 (3000K) 6600/8200 (4000K/6500K)	120°	70,000

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +50°C

New ECO-Design MEGAMAN® **HAGON XCHANGE** is designed to deliver high performance with a more sustainable and longer working life



Emergency Kit.









HAGON FARM XCHANGE®

























Applications

- Agricultural environments
- Livestock husbandry poultry, cattle and pig buildings
- Stables
- Workshops
- Greenhouses
- Outdoor areas





Performa

Features & Benefits

- AMMONIA RESISTANT
- SELECTABLE 3 CCT
- SELECTABLE LUMEN OUTPUT
- IP66 AND IK08 RATING
- **UP TO 6000 LUMENS**
- UP TO 121LM/W
- 70,000 HOURS
- 5 YEAR WARRANTY
- · Patented Eco-design with replaceable light source
- · Permanent live option
- · Chemical resistant housing
- · Offering 4-pole option
- Ideal low energy alternative to T5 and T8 linear fluorescent luminaires
- Simple fast-fix stainless steel mounting clips for easy installation
- · PIMMA End Cap and PIMMA Diffuser
- Option to conceal cable entry
- · Control lighting when not in use
- Wide and even light distribution
- · Reduced maintenance costs



HAGON FARM XCHANGE | IP66

SELECTABLE LUMEN OUTPUT AND 3 CCT Anti-Corrosive Integrated LED Batten






















Max. number of connections

- · 34 units for ?
- * Based on using 1.5mm² wire
- * Number of looping up to 6A Max.



Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712786	5FT ANTI-CORROSIVE WEATHERPROOF IP66 BATTEN	33W/50W	3000K 4000K 6500K	3650/5500 (3000K) 4000/6000 (4000K/6500K)	120°	70,000

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +50°C



ACCESSORIES



190750 DINO 2 **End Covers**



190740 DINO 2 Suspension Clips (X2)



190742 DINO 2 Brackets for theft protection



SCAN THE OR CODE FOR MORE INFORMATION



Photometric data: Please refer to our website for up to date photometric







LED BULKHEADS

A flexible range of tough and durable high performance integrated LED bulkheads with new eco-design and easily replaceable modular plug & play features for improved and longer product working life.











RENZO XCHANGE®





























Applications

- Hotels
- Bathrooms
- Kitchens
- Corridors
- Residential applications



website for up to



Performa

Features & Benefits

- SELECTABLE 3 CCT
- SELECTABLE TRI-LUMEN OUTPUT
- IP44 AND IK05 RATING
- UP TO 2400 LUMENS

- UP TO 120LM/W
- EMERGENCY & MICROWAVE **SENSOR OPTIONS**
- 100,000 HOURS
- 5 YEAR WARRANTY
- · Eco-design with replaceable light source
- · Plug-and-play modular design enhances installation flexibility
- Tri-CCT (3000K/4000K/6500K) by integral built-in switch
- Tri-lumen (2400lm/1800lm/1200lm) Output selection for MEGAMAN® RENZO XChange M and L sizes
- XChange features offers flexible stock management
- High Power factor > 0.9
- · Flicker free
- 5 Year Warranty



MEGAMAN® RENZO XChange is available in S, M and L sizes



RENZO XCHANGE | IP44

SELECTABLE LUMEN OUTPUT AND 3 CCT Modular Plug-and-Play Integrated LED Bulkhead











5YR



100.000



IP44













Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712351	SELECTABLE LUMEN OUTPUT AND 3 CCT MODULAR PLUG-AND-PLAY LED BULKHEAD	10W	3000K 4000K 6500K	1150(3000K) 1200 (4000K/6500K)	140°	100,000

ACCESSORIES AVAILABLE

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -20°C to +40°C Operating temperature with RENZO XChange Emergency Kit 0°C to +35°C









ACCESSORIES



712278 RENZO XChange Microwave Motion Sensor



712279 RENZO XChange **Emergency Kit**

3 Year Warranty on both Microwave Sensor and Emergency Kit modules.





SCAN THE OR CODE FOR MORE INFORMATION



Photometric data: Please refer to our vebsite for up to date photometric information.



RENZO XCHANGE | IP44

SELECTABLE LUMEN OUTPUT AND 3 CCT
Modular Plug-and-Play Integrated LED Bulkhead









2400



5YR WARRANT



100,000









Code Description	Watts	K	Lumens	Beam Angle	Hrs Life
712352 ECO-DESIGN MODULAR L BULKHEAD WITH SELECTABLE CCT & LUME OUTPUT	15W/	3000K/ 4000K/ 6500K	1150/1730/2300 (3000K) 1200/1800/2400 (4000K/6500K)	110°	100,000

ACCESSORIES AVAILABLE

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C











100.000









Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712353	ECO-DESIGN MODULAR LED BULKHEAD WITH SELECTABLE CCT & LUMEN OUTPUT	10W/ 15W/ 20W	3000K/ 4000K/ 6500K	1150/1730/2300 (3000K) 1200/1800/2400 (4000K/6500K)	110°	100,000


ACCESSORIES AVAILABLE



RENZO XCHANGE | IP44

SELECTABLE LUMEN OUTPUT AND 3 CCT
Modular Plug-and-Play Integrated LED Bulkhead



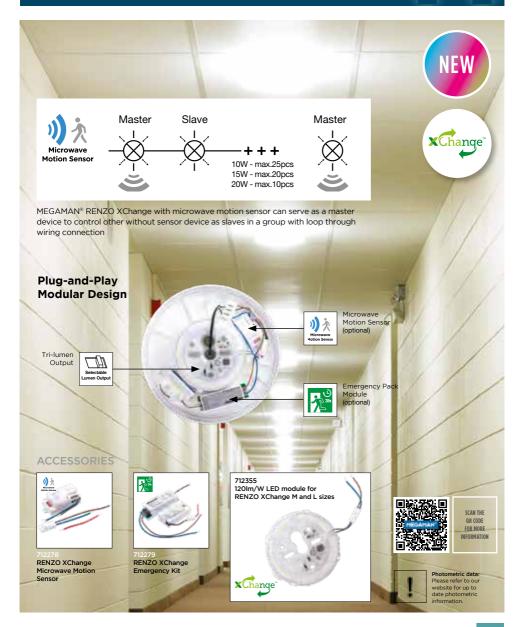



FONDA XCHANGE®





























Features & Benefits

- SELECTABLE 3 CCT
- SELECTABLE TRI-LUMEN OUTPUT
- IP66 AND IK10 RATING
- UP TO 2400 LUMENS

- UP TO 120LM/W
- EMERGENCY & MICROWAVE **SENSOR OPTIONS**
- 100,000 HOURS
- 5 YEAR WARRANTY
- · Eco-design with replaceable light source
- IP66 waterproof protection and with IK10 rated vandal resistant
- · Corrosion free tough polycarbonate enclosure & UV resistant
- High operating temperature of up to 50°C allows use in outdoor environments
- · Theft-proof screws are applied for deterring thieves and vandals
- · Emergency kit with 300lm output lasting for 3 hours
- MEGAMAN® FONDA XChange with microwave motion sensor can serve as a master device to control other FONDA XChange with out sensor as slaves in a group with loop through wiring connection, with maximum 250W loading
- DC input compatible 180V-260V

Applications

- · Car parks
- Warehouses
- Stairwells
- Corridor



website for up to







FONDA XCHANGE | IP66

SELECTABLE TRI-LUMEN OUTPUT AND 3 CCT Integrated LED Bulkhead









7400





100.000



IP66









Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712282	SELECTABLE 3 CCT AND TRI-LUMEN OUTPUT LED BULKHEAD	10W/ 15W/ 20W	3000K/ 4000K/ 6500K	1100/1680/2220 (3000K) 1200/1800/2400 (4000K/6500K)	110°	100,000

ACCESSORIES AVAILABLE

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -20 °C to +50 °C $\,$









ACCESSORIES



712278 XChange Microwave Motion Sensor



712279 XChange Emergency Kit

3 Year Warranty on both Microwave Sensor and Emergency Kit modules.







SCAN THE QR CODE FOR MORE INFORMATION



Photometric data: Please refer to our website for up to date photometric information.



EasyFix 2D Replacement



























NEW **EASY RETROFIT SOLUTION FOR THE FAST & HASSLE FREE** UPGRADE OF EXISTING FITTINGS WITH OLD 2D & PL FLUORESCENT LAMPS

Applications

· All fittings with old fluorescent 2D lamps

Features & Benefits

- SELECTABLE 3 CCT
- SELECTABLE TRI-LUMEN OUTPUT
- UP TO 3100 LUMENS
- UP TO 155LM/W

- MAGNETIC MOUNTING FEET **& 3M MATERIAL SUPPLIED**
- 100,000 HOURS
- 5 YEAR WARRANT



- New eco-design replaceable LED light source designed to enable the quick and easy retrofit of old fittings with fluorescent technology to help extend their useful working life
- High operating temperature of up to 40°C allows use in indoor environments
- · Perfect for easy and quick retrofit for old decorative fittings that require upgrade to energy and money saving LED technology
- MEGAMAN® EasyFix supplied with 3 magnetic feet and 3M material to enable mounting into any existing fittings housing
- Flexible sustainable solution enables for tool-free wiring into old fittings existing module. No need to change fitting housing.
- DC input compatible 220V-240V









EASYFIX 2D REPLACEMENT

EASY RETROFIT 2D REPLACEMENT
SELECTABLE TRI-LUMEN OUTPUT AND 3 CCT









3100






100.000







Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712492	EASYFIX RETROFIT 2D REPLACEMENT WITH SELECTABLE 3 CCT AND TRI-LUMEN OUTPUT LED LIGHT SOURCE	10W/ 15W/ 20W	3000K/ 4000K/ 6500K	1400/2100/2800 (3000K) 1550/2330/3100 (4000K/6500K)	140°	100,000

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30 °C to +40 °C





LYRA






























Applications

Residential

· Car parks Warehouses


Stairwells

Corridor

Features & Benefits

- IP65 & IK10 RATING
- SELECTABLE 3 CCT
- SELECTABLE LUMEN OUTPUT
- REPLACEABLE LIGHT SOURCE
- UP TO 1800 LUMENS

- UP TO 100LM/W
- EMERGENCY & MICROWAVE **SENSOR OPTIONS**
- 50,000 HOURS
- 5 YEAR WARRANTY



- · Tough and durable modular bulkhead
- · Switchable 3 Wattage 9W, 14W, 18W
- 3-CCT switchable 3000K, 4000K, 6000K
- · Plug-and-play modular microwave sensor
- · Plug-and-play modular emergency, SELF-TEST, 3 Hrs duration.
- · Full arc surface slim design for even light distribution
- · Replaceable light source for improved sustainability
- · BESA box compatible
- · 4-side conduit entries
- · Detachable push-in terminal for tool-less quick and easy wiring
- 5 Year Warranty



website for up to







LYRA | IP65

SELECTABLE LUMEN OUTPUT AND 3 CCT Modular Plug-and-Play Integrated LED Bulkhead









1800





50.000














Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712501	IP65 LED BULKHEAD WITH SELECTABLE 3 CCT AND SELECTABLE LUMEN OUTPUT	9W/14W/ 18W	3000K/ 4000K/ 6000K	800/1250/1620 (3000K) 900/1400/1800 (4000K) 850/1350/1700 (6000K)	110°	50,000

ACCESSORIES AVAILABLE

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +50°C

Plug-and-Play Modular Design





Quick and hassle free replaceable



Easy twist action access enables quick BESA box cable entry installation & flexible contractor choice of 4-side conduit entries

ACCESSORIES



712502 LYRA Microwave **Motion Sensor**

- No.

712503 LYRA Emergency Self-Test Kit

3 Year Warranty on both Microwave Sensor and Emergency Self-Test Kit modules.

712554 - LYRA Black Ring 712556 - LYRA Chrome Ring





SCAN THE QR CODE FOR MORE INFORMATION



Photometric data: Please refer to our website for up to date photometric information.



HERA ROUND & SQUARE





















Applications

- · Car parks
- · Public area
- Stairwells
- Corridors
- · Garden and balcony

Features & Benefits

- IP65 AND IK08 RATING
- UP TO 600 LUMENS
- UP TO 67LM/W
- TOOL-LESS WIRING
- 3 DESIGN STYLE OPTIONS IN 1 BOX
- 30,000 HOURS
- 3 YEAR WARRANTY

Photometric data: Please refer to our website for up to date photometric





MEGAMAN® HERA is an integrated LED Wall Lamp with IP65 protection suitable for numerous outdoor applications. Brilliant modern outdoor bulkhead with 3 different frame design options to provide flexible solutions to meet all tastes. Easy installation for wall mounted application makes Hera the ideal robust everyday economy lighting solution.

- · 3 different frame design options in 1 box
- · Optimise stock control and storage space
- IP65 protection
- · Life time up to 30,000hrs
- · Tool-less wiring
- Anti-UV polycarbonate housing



HERA ROUND | IP65

SINGLE OUTPUT **Outdoor Integrated LED Bulkhead**









30.000













Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712452	ROUND OUTDOOR IP65 BULKHEAD COMPLETE WITH 3 FRAME OPTIONS	9W	2700K	600	110°	30,000

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C





HERA SQUARE | IP65

SINGLE OUTPUT **Outdoor Integrated LED Bulkhead**









30.000











Description

SQUARE OUTDOOR IP65 BULKHEAD COMPLETE WITH 3 FRAME OPTIONS K/ CRI 2700K Lumens 600 110°

Beam Angle Hrs Life 30.000

ACCESSORIES AVAILABLE

Code

712453

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C





Watts

9W



ALL 3 FRAME DESIGN OPTIONS SUPPLIED

Competitive priced MEGAMAN® HERA is supplied with 3 stylish and easy to fit frame options for even greater flexibility




SCAN THE QR CODE FOR MORE INFORMATION



Please refer to our website for up to date photometric information.





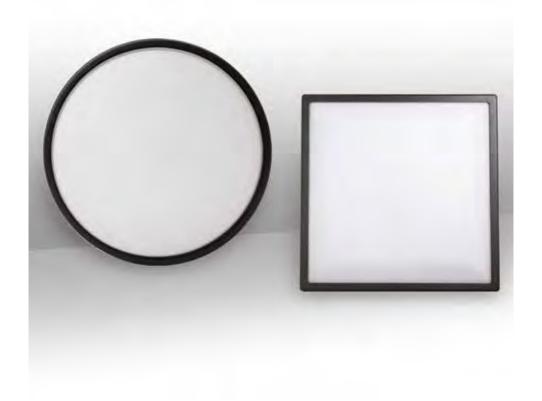

HERA | IP65 Robust and great value

Robust and great value for money Integrated LED Outdoor Round and Square Bulkhead







LED HIGH BAYS

Impressive range of robust, energy efficient high bays with instant and controllable high lumen output performance.

Designed to last and work effectively in demanding large area industrial and commercial environments.



KEO 2 IP65
ANTI-CORROSIVE HIGH BAY
WITH SELECTABLE WATTAGE
& LUMEN OUTPUT



GEO 2 IP65
DIMMING HIGH BAY
WITH SELECTABLE WATTAGE
& LUMEN OUTPUT



MEGAMAN®

Performa

MEGAMAN® **e**ssentials





KEO 2





































Applications

- · High-ceiling areas
- Halls
- Stables
- Warehouses
- Distribution centres
- · General manufacturing

Features & Benefits

- SELECTABLE WATTAGE
- SELECTABLE LUMEN OUTPUT
- UP TO 31000 LUMENS
- UP TO 165LM/W

- TWIST & LOCK MICROWAVE **SENSOR OPTION**
- 50.000 HOURS
- 5 YEAR WARRANTY

- · Replacement for traditional high bay in durable die-cast aluminium with anti-corrosion powder coating
- Easy installation with single point hook mounting design
- IP65 protection and high vandal resistant with IK08
- Dimming via microwave sensor
- Modular plug and play microwave motion sensor (configuring by optional remote controller).
- Equipped with 30cm length H05RN-F 3*1.0mm2 power cable with IP65 connector
- · Emergency kit with replaceable LiFeP04 battery
- High surge protection level: 6kV (L-N); 6kV (L,N-PE)
- Operation temperature -30° to +50°
- · 2 Year On-site warranty









KEO 2 | IP65

SELECTABLE WATTAGE & LUMEN OUTPUT Anti-Corrosive Integrated LED High Bay
































Code	Description	Watts	K	Lumens	LM/W	Beam Angle	Hrs Life
712147	IP65 ANTI-CORROSIVE SLIM HIGH BAY WITH SELECTABLE & VARIABLE WATTAGE AND LUMEN OUTPUT	60W 80W 100W	4000K	60W [9900lm] 80W [12800lm] 100W [15500lm]	165 160 155	90°	50,000

ACCESSORIES AVAILABLE

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30 °C to +50 °C

MEGAMAN® KEO 2 is the ultimate 'go to' for a cost-effective and durable high bay that can withstand the toughest of environments. This smart looking slim design high bay delivers flexible high performance natural 4000K bright lighting, ideal for demanding commercial and industrial applications. Modular plug and play microwave motion sensor enables dimming control for more energy saving capability when configured with remote controller option.


ACCESSORIES



711264 KEO 2 Microwave Motion Sensor



711320 KEO 2 Motion Sensor Remote Control



MEGAMAN® KEO 2 microwave sensor detects movement within around 5-6m radius horizontally and / or 10-12m vertically beneath sensor, and only lights up when movement detected for energy saving.

HIGH BAYS



KEO 2 | IP65

SELECTABLE WATTAGE & LUMEN OUTPUT Anti-Corrosive Integrated LED High Bay





























	141mm
Ø320mm	-

Code	Description	Watts	K	Lumens	LM/W	Beam Angle	Hrs Life
712148	IP65 ANTI-CORROSIVE SLIM HIGH BAY WITH SELECTABLE WATTAGE AND LUMEN OUTPUT	80W 120W 150W	4000K	80W [13200lm] 120W [19200lm] 150W [23250lm]	165 160 155	90°	50,000

ACCESSORIES AVAILABLE

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30 $^{\circ}$ C to +50 $^{\circ}$ C





























Ø360mm

Code	Description	Watts	K	Lumens	LM/W	Beam Angle	Hrs Life
712145	IP65 ANTI-CORROSIVE SLIM HIGH BAY WITH SELECTABLE WATTAGE AND LUMEN OUTPUT	100W 150W 200W	4000K	100W [16500lm] 150W [24000lm] 200W [31000lm]	165 160 155	90°	50,000

ACCESSORIES AVAILABLE

HIGH BAYS



KEO 2 EMERGENCY | IP65

SELECTABLE & VARIABLE WATTAGE & LUMEN OUTPUT Anti-Corrosive Integrated LED High Bay
































Code	Description	Watts	K	Lumens	LM/W	Beam Angle	Hrs Life
712219	IP65 ANTI-CORROSIVE EMERGENCY SLIM HIGH BAY WITH SELECTABLE WATTAGE AND LUMEN OUTPUT	60W 80W 100W	4000K	60W [9900lm] 80W [12800lm] 100W [15500lm]	165 160 155	90°	50,000

ACCESSORIES AVAILABLE

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +50°C





























Ø320m	nm

Code	Description	Watts	K	Lumens	LM/W	Beam Angle	Hrs Life
712220	IP65 ANTI-CORROSIVE EMERGENCY SLIM HIGH BAY WITH SELECTABLE WATTAGE AND LUMEN OUTPUT	80W 120W 150W	4000K	80W [13200lm] 120W [19200lm] 150W [23250lm]	165 160 155	90°	50,000

ACCESSORIES AVAILABLE



KEO 2 EMERGENCY | IP65

SELECTABLE & VARIABLE WATTAGE & LUMEN OUTPUT Anti-Corrosive Integrated LED High Bay
































Ø360mm

Code	Description	Watts	K	Lumens	LM/W	Beam Angle	Hrs Life
712221	IP65 ANTI-CORROSIVE EMERGENCY SLIM HIGH BAY WITH SELECTABLE WATTAGE AND LUMEN OUTPUT	100W 150W 200W	4000K	100W [16500lm] 150W [24000lm] 200W [31000lm]	165 160 155	90°	50,000

ACCESSORIES AVAILABLE

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +50°C



Emergency Kit 5W 3 Hour is included with all KEO 2 Emergency High Bays


ACCESSORIES




711264 KEO 2 Microwave Motion Sensor



711320 KEO 2 Motion Sensor Remote Control



MEGAMAN* KEO 2 microwave sensor detects movement within around 5-6m radius horizontally and / or 10-12m vertically beneath sensor, and only lights up when movement detected for energy saving.

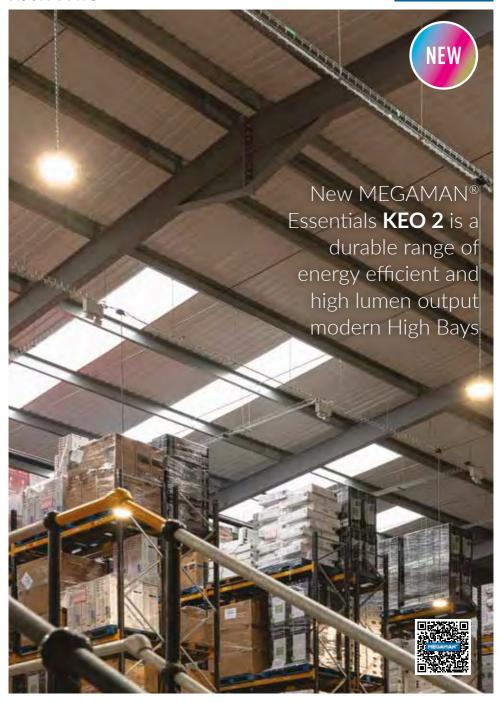



GEO₂

























Applications

- · High-ceiling areas
- Halls
- Stables
- Warehouses
- · Distribution centres
- · General manufacturing

Features & Benefits

- 5 SELECTABLE WATTAGES
- SELECTABLE LUMEN OUTPUT
- UP TO 21000 LUMENS
- UP TO 150LM/W

- DIMMING VIA REMOTE **CONTROLLABLE SENSOR**
- 50,000 HOURS
- 5 YEAR WARRANTY

- · IP65 protection and high vandal resistant with IK08
- Easy installation with single point hook mounting design
- Eye hook included
- Dimming via microwave sensor only
- Anti-surge protected fitting
- In-line flex connector with push fit. Allows PCR2000 flex to be connected without using additional adaptable box. Reducing installation time dramatically
- Flicker free to avoid stroboscopic effect with rotating machines
- · Counter balance included with Microwave Motion Sensor to ensure balanced install
- Operation temperature -30° to +50°
- · 2 Year On-site warranty







GEO 2 | IP65

DIMMING SELECTABLE WATTAGE & LUMEN OUTPUTIntegrated LED High Bay































Ø300mm

Code	Description	Watts	K	Lumens	LM/W	Beam Angle	Hrs Life
710931	IP65 DIMMING HIGH BAY WITH SELECTABLE WATTAGE AND LUMEN OUTPUT	70W 90W 100W 125W 150W	4000K	70W [10500lm] 90W [13500lm] 100W [15000lm] 125W [18900lm] 150W [21000lm]	150 150 150 150 140	110°	50,000

ACCESSORIES AVAILABLE

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30 °C to +50 °C



Microwave Sensor Module option



ACCESSORIES



710729 GEO 2 Microwave Motion Sensor



710842 GEO 2 Motion Sensor Remote Control



710971 GEO 2 0-10V Dimming wire 300mm



190704 90° Aluminium Reflector





GEO 2 EMERGENCY | IP65

DIMMING SELECTABLE WATTAGE & LUMEN OUTPUTIntegrated LED High Bay

































Ø300mm

Code	Description	Watts	K	Lumens	LM/W	Beam Angle	Hrs Life
710931EMG	IP65 EMERGENCY DIMMING HIGH BAY WITH SELECTABLE WATTAGE AND LUMEN OUTPUT	70W 90W 100W 125W 150W	4000K	70W [10500lm] 90W [13500lm] 100W [15000lm] 125W [18900lm] 150W [21000lm]	150 150 150 150 140	110°	50,000

ACCESSORIES AVAILABLE

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30 $^{\circ}$ C to +50 $^{\circ}$ C

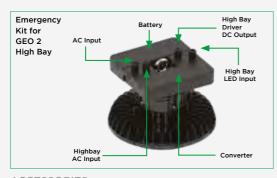

MEGAMAN* GEO 2 microwave sensor detects movement within around 4m radius horizontally when mounted at 16m height and an optimal 16m radius when mounted at 8m height.

ACCESSORIES



710729 GEO 2 Microwave Motion Sensor



710842 GEO 2 Motion Sensor Remote Control




710971 GEO 2 0-10V Dimming wire 300mm



190704 90° Aluminium Reflector





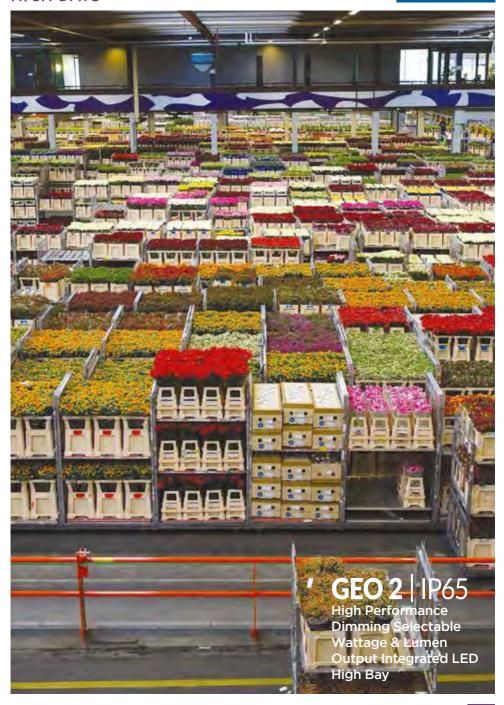





LED FLOODLIGHTS

MEGAMAN® floodlight range of modern, durable and corrosion-free powerful LED floodlights.

Including new IP66 marine grade HUGO Coastal floodlight.









VOSS



























Applications

- Industrial areas
- Warehouses
- Distribution centres
- Commercial and retail environments
- · Industrial environments
- Facade
- · Billboards
- · Gate areas







Features & Benefits

- 6 DIFFERENT SIZE AND WATTAGE OPTIONS
- PRE-FLEXED WITH 500MM FLY LEAD
- WIDE AREA FLOODLIGHT
- UP TO 18000 LUMENS
- UP TO 90LM/W
- 30,000 HOURS
- 3 YEAR WARRANTY
- · IP65 protection and high vandal resistant with IK08
- Available in 10W, 20W, 30W, 50W, 100W and 200W
- With 0.5m H05RN-F 3G.0mm² cable
- · Easy and quick installation
- · Slim and extra light in weight
- Constructed from UV resistant and UV resistant die-cast aluminium housing
- Adjustable tilting +180° fixing bracket for flexible positioning
- · Wide area floodlight without glare
- Tempered glass
- · Robust weatherproof construction suitable for outdoor use
- Operation temperature -30° to +50°
- 3 Year Warranty



VOSS | IP65

PRE-FLEXED WITH 500MM FLY LEAD
Corrosion-Free Integrated LED Floodlight







3YR WARRANT



30,000




IP65









Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711285	IP65 LED FLOODLIGHT WITH ANGLE BRACKET & 500MM FLY LEAD	10W	4000K	900	110°	30,000

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30 °C to +50 °C






3YR WARRANTY











Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711286	IP65 LED FLOODLIGHT WITH ANGLE BRACKET & 500MM FLY LEAD	20W	4000K	1800	110°	30,000



VOSS | IP65

PRE-FLEXED WITH 500MM FLY LEAD Corrosion-Free Integrated LED Floodlight







3YR WARRANTY





IP65




CORROSION









Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711287	IP65 LED FLOODLIGHT WITH ANGLE BRACKET & 500MM FLY LEAD	30W	4000K	2700	110°	30,000

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +50°C





3YR WARRANTY








CORROSION







Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711288	IP65 LED FLOODLIGHT WITH ANGLE BRACKET & 500MM FLY LEAD	50W	4000K	4500	110°	30,000



VOSS | IP65

PRE-FLEXED WITH 500MM FLY LEAD
Corrosion-Free Integrated LED Floodlight







3YR WARRANT






IP65









Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711289	IP65 LED FLOODLIGHT WITH ANGLE BRACKET & 500MM FLY LEAD	100W	4000K	9000	110°	30,000

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +50°C



SINGLE OUTPUT














Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711291	IP65 LED FLOODLIGHT WITH ANGLE BRACKET & 500MM FLY LEAD	200W	4000K	18000	110°	30,000



VOSS PIR SENSOR



















TIME: 3 SECONDS - 8 MINUTES SENSITIVITY CAN BE ADJUSTED LUX CAN BE ADJUSTED









Applications

- Industrial areas
- Warehouses
- · Distribution centres
- · Commercial and retail environments
- Industrial environments
- Facade
- Billboards
- Gate areas



MEGAMAN®

essentials

Features & Benefits

- 3 DIFFERENT SIZE AND WATTAGE OPTIONS
- PRE-FLEXED WITH 500MM **FLY LEAD**
- WIDE AREA FLOODLIGHT
- UP TO 4500 LUMENS
- UP TO 88LM/W
- 30.000 HOURS
- 3 YEAR WARRANTY
- IP54 protection and high vandal resistant with IK08
- Available in 11W, 21W and 51W
- With 0.5m H05RN-F 3G.0mm² cable
- · Easy and quick installation
- · Slim and extra light in weight
- · Constructed from UV resistant and UV resistant die-cast aluminium housing
- Adjustable tilting +180° fixing bracket for flexible positioning
- · Wide area floodlight without glare
- Tempered glass
- · Robust weatherproof construction suitable for outdoor use
- Operation temperature -30° to +50°
- Directly connected PIR Sensor can not be removed



VOSS PIR SENSOR | IP54

PRE-FLEXED WITH 500MM FLY LEAD Corrosion-Free Integrated LED Floodlight







3YR



30,000











Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711292	IP54 LED FLOODLIGHT WITH PIR SENSOR & 500MM FLY LEAD	11W	4000K	900	110°	30,000

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +50°C


















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711293	IP54 LED FLOODLIGHT WITH PIR SENSOR & 500MM FLY LEAD	21W	4000K	1800	110°	30,000



VOSS PIR SENSOR | IP54

Corrosion-Free Integrated LED Floodlight









30.000






CORROSIO







Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711295	IP54 LED FLOODLIGHT WITH PIR SENSOR & 500MM FLY LEAD	51W	4000K	4500	110°	30,000

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +50°C

Quick and easy to install range of durable outdoor LED floodlights with PIR sensor for instant illumination and added security



OR CODE FOR MORE INFORMATION



Please refer to our website for up to date photometric





HUGO COASTAL



























Applications

- · Coastal area buildings
- Parking areas
- Sport venues and stadiums
- Outdoor floodlighting for recreational sports venues and fields
- · Industrial facilities
- · Commercial complexes
- Public areas





Performa

Features & Benefits

- SYMMETRICAL AND ASYMMETRICAL OPTICAL LENS OPTIONS
- SWITCHABLE CCT AND
 SELECTABLE LUMEN OUTPUT
- COASTAL ANTI-CORROSIVE PROTECTION
- IP66 AND IK08 RATING
- UP TO 22500 LUMENS
- UP TO 150LM/W
- 70,000 HOURS
- 5 YEAR WARRANTY
- Anti-corrosion function thanks to stainless-steel mounting bracket and aluminium die-cast housing
- High luminous efficiency up to 150 lm/W
- Symmetrical / Asymmetrical optics can be used in a wide range of application areas
- Energy savings of up to 90% compared to halogen lamp floodlights
- Energy savings of up to 45% compared to luminaires that use conventional discharge lamps
- High surge protection: up to 6 kV (L/N-PE), 6 kV (L-N)
- · Tilt-angle degree marks for accurate tilting adjustment
- · Air ventilating gland for air pressure balancing



HUGO COASTAL IP66

SYMMETRIC & ASYMMETRIC OPTIC

Coastal & Anti-Corrosion Integrated LED Floodlight







HUGO COASTAL | IP66

SYMMETRIC OPTIC

Coastal & Anti-Corrosion Integrated LED Floodlight































361mm

55mm

Code	Description	Watts	K	Lumens	LM/W	Beam Angle	Hrs Life
712456	IP66 ANTI-CORROSION FLOODLIGHT WITH SELECTABLE CCT AND LUMEN OUTPUT SYMMETRIC OPTICS	70W 70W 70W 90W 90W 90W	3000K 4000K 5700K 3000K 4000K 5700K	70W [9500lm] 70W [10500lm] 70W [10200lm] 90W [12200lm] 90W [13500lm] 90W [13000lm]	136 150 146 136 150 145	90°	70,000

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C



Description

IP66 ANTI-CORROSION

SELECTABLE CCT AND

FLOODLIGHT WITH

SYMMETRIC OPTICS

LUMEN OUTPUT



5YR



70.000



IP66



147











3000K

4000K

5700K

3000K

4000K

5700K

Lumens

120W [15700lm]

120W [18000lm]

120W [17500lm]

150W [20500lm]

150W [22500lm]

150W [22000lm]



	30 1111111	3711111
LM/W	Beam Angle	Hrs Life
131 150 146 137 150	90°	70,000

Code

712457

Watts

120W

120W

120W

150W

150W

150W



HUGO COASTAL | IP66

ASYMMETRIC OPTIC

Coastal & Anti-Corrosion Integrated LED Floodlight





































361mm

55mm

Code	Description	Watts	K	Lumens	LM/W	Beam Angle	Hrs Life
712458	IP66 ANTI-CORROSION FLOODLIGHT WITH SELECTABLE CCT AND LUMEN OUTPUT ASYMMETRIC OPTICS	70W 70W 70W 90W 90W 90W	3000K 4000K 5700K 3000K 4000K 5700K	70W [9800lm] 70W [10500lm] 70W [10500lm] 90W [12200lm] 90W [13000lm] 90W [13000lm]	140 150 150 136 145 145	TP3A 135°x60°	70,000

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C



DUAL WATTAGE

5YR



70,000



IP66



ANTI CORROSIOI











ASYMMETRIC





Code	Description	Watts	K	Lumens	LM/W	Beam Angle	Hrs Life
712459	IP66 ANTI-CORROSION FLOODLIGHT WITH SELECTABLE CCT AND LUMEN OUTPUT ASYMMETRIC OPTICS	120W 120W 120W 150W 150W	3000K 4000K 5700K 3000K 4000K	120W [15700lm] 120W [18000lm] 120W [18000lm] 150W [20500lm] 150W [22000lm]	131 150 150 137 147	TP3A 135°x60°	70,000





LED FIRE-RATED DOWNLIGHTS

A range of versatile, high performance, fixed and tilt fire-rated integrated LED downlights.

Providing fast, secure, tool-less & cost-effective energy efficient installations for contractors.







TEGO SLIM IP65

FIRE-RATED DOWNLIGHT



















24 MEGA MEGA MITTER



Applications

- Hotels
- Restaurants
- · Commercial and retail environments
- · Rental accommodation
- New builds

Features & Benefits

- COMPACT DOWNLIGHT CAN WITH GU10 BASE
- FULLY FIRE-RATED FOR 30/60/90 MINUTE CEILING
- SIMPLE MEGAQUICK LEVER **CONNECTOR INCLUDED FOR FAST FIRST & SECOND FIX**
- TOTAL FLEXIBILITY WITH REPLACEABLE GU10 LAMP
- RANGE OF EASY TWIST AND **LOCK DETACHABLE IP65 & IP20 BEZELS I**
- 5 YEAR WARRANTY



website for up to



Performa

- · Simple MEGAquick Loop in/loop out lever connector with easy push-in terminals for ultra fast 'Connect & Go' tool-less wiring
- Translucent lid to visibly check wiring if required
- · Compact size for small ceiling voids only 65 mm deep
- 30/60/90 minute fire-rated
- · Can house ANY Megaman GU10 lamp allowing greater versatility for end user with easy replacing or changeover of GU10 lamp
- · IP65 and IP20 bezels available in various colour options both IP ratings fit same can
- 5 Year Warranty



FR-PRO | IP65/IP20

FULLY FIRE-RATED COMPACT DOWNLIGHT CAN With GU10 Base







FR-PRO | IP65/IP20 FULLY FIRE-RATED COMPACT DOWNLIGHT CAN With GUIO Base















21	0mm
Ø72mm	
2/2111111	

Code	Description	Power Rating	Light Source	Lamp Bases	Hole Cut-out (mm)
712038*	IP65/IP20 FULLY FIRE-RATED CAN WITH GU10 BASE	VARIABLE DEPENDING ON GU10	PAR16	GU10	68

ACCESSORIES AVAILABLE

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30 °C to +40 °C

*Please purchase bezel separately



FR-PRO works with MEGAMAN® TEMPUS GU10 Emergency Pack EMC Compliant

Order Code: 711369



FR-PRO works with MEGAMAN® TEMPUS GUIO Emergency Pack

EMC Compliant

Order Code: EMG147247





SCAN THE QR CODE FOR MORE INFORMATION



Photometric data: Please refer to our website for up to date photometric information.



ACCESSORIES | FR-PRO

PERFORMA FR-PRO IP65 TWIST-LOCK BEZELS





712045 FR-PRO IP65 White Bezel



FR-PRO IP65 Chrome Bezel



FR-PRO IP65 Brushed Nickel Bezel



FR-PRO IP65 Black Bezel



712049 FR-PRO IP65 Antique Brass Bezel

PERFORMA FR-PRO IP20 TWIST-LOCK BEZELS





712040 FR-PRO IP20 White Bezel



712041 FR-PRO IP20 Chrome Bezel



FR-PRO IP20 Brushed Nickel Bezel



FR-PRO IP20 Black Bezel



FR-PRO IP20 Antique Brass Bezel

PERFORMA XL D110 FR-PRO BEZEL | IP65

MEGAMAN® have produced the ideal instant solution to costly ceiling make good for contractors. The new larger twist-lock Performa XL FR-Pro Bezel, is a 110mm diameter white IP65 bezel designed to work specifically with our FR-PRO Fully Fire-Rated Downlight. Offering contractors a really quick and effortless solution for concealing previous installation shadow marks or damaged ceiling plaster.



712316
PERFORMA XL
D110 FR-PRO IP65
White Bezel







PRO TILT





















Applications

- Hotels
- Restaurants
- · Commercial and retail environments
- · Rental accommodation
- New builds

Features & Benefits

- TILT ADJUSTABLE DOWN **LIGHT CAN WITH GU10 BASE**
- FULLY FIRE-RATED FOR 30/60/90 MINUTE CEILING
- SIMPLE MEGAQUICK LEVER **CONNECTOR INCLUDED FOR FAST FIRST & SECOND FIX**
- TOTAL FLEXIBILITY WITH REPLACEABLE GU10 LAMP
- RANGE OF EASY TWIST AND **LOCK DETACHABLE IP20** TILT BEZELS I
- 5 YEAR WARRANTY





- Easy adjustable 30° tilt angle for greater lighting control
- Simple MEGAquick Loop in/loop out lever connector with easy push-in terminals for ultra fast 'Connect & Go' tool-less wiring
- Translucent lid to visibly check wiring if required
- 30/60/90 minute fire-rated
- · Can house ANY Megaman GU10 lamp allowing greater versatility for end user with easy replacing or changeover of GU10 lamp
- · Stylish range of IP20 bezels available in various colour and finish options
- 5 Year Warranty



FR-PRO TILT | IP20

FULLY FIRE-RATED COMPACT DOWNLIGHT CAN Tilt Adjustable with GU10 Base


















Code	Description	Power Rating	Light Source	Lamp Bases	Hole Cut-out (mm)
712039*	IP20 FULLY FIRE-RATED CAN WITH GUIO BASE	VARIABLE DEPENDING ON GU10	PAR16	GU10	75

ACCESSORIES AVAILABLE

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

*Please purchase tilt bezel separately





FR-PRO works with MEGAMAN® TEMPUS GU10 Emergency Pack EMC Compliant

Order Code: 711369



FR-PRO works with MEGAMAN® TEMPUS GU10 Emergency Pack EMC Compliant

Order Code: EMG147247

ACCESSORIES



712050 FR-PRO IP20 White Bezel



712051 FR-PRO IP20 Chrome Bezel



712052 FR-PRO IP20 Brushed Nickel Bezel



712053 FR-PRO IP20 Black Bezel



712054 FR-PRO IP20 Antique Brass Bezel



TEGO 3



























Applications

- Hotels
- Restaurants
- · Commercial and retail environments
- · Rental accommodation
- New builds

Features & Benefits

- LOW PROFILE FIRE-RATE LED DOWNLIGHT
- FULLY FIRE-RATED FOR 30/60/90 MINUTE CEILING
- SELECTABLE DUAL LUMEN OUTPUT
- SELECTABLE 4 CCT

- +56% MORE ILLUMINATED AREA
- RANGE OF IP65 SIMPLE TWIST-LOCK BEZELS
- SMOOTH TRIAC DIMMING
- 50,000 HOURS
- 5 YEAR WARRANTY





Performa

- Selectable 4 CCT 2700K, 3000K, 4000K and 6500K
- Covered spring clips to prevent damage to ceilings
- Simple MEGAquick Loop in/ loop out lever connector with easy push-in terminals for ultra fast 'Connect & Go' tool-less wiring
- · Low profile design. Ideal for small ceiling voids only 43 mm deep
- · 30/60/90 minute fully fire-rated
- · Can be covered with thermal insulation material and installed without any insulation guard
- 5 Year Warranty



TEGO 3 IP65

DIMMING SELECTABLE 4 CCT & LUMEN OUTPUTFully Fire-Rated Integrated LED Downlight







TEGO 3 | IP65

DIMMING SELECTABLE 4 CCT & LUMEN OUTPUT Fully Fire-Rated Integrated LED Downlight
















IP65









Cut-out Ø68mm

Code	Description	Watts	K	Lumens	LM/W	Hole Cut-out (mm)	Beam Angle	Hrs Life
712212	IP65 DIMMING SELECTABLE 4 CCT & LUMEN OUTPUT FIRE RATED DOWNLIGHT	4W 4W 4W 7.5W 7.5W 7.5W 7.5W	2700K 3000K 4000K 6500K 2700K 3000K 4000K 6500K	440lm 450lm 480lm 460lm 750lm 780lm 830lm 800lm	110 113 120 115 100 104 111 107	ø68	60°	50,000

ACCESSORIES AVAILABLE

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

*Please purchase bezel separately



TEGO 3 works with **MEGAMAN® TEMPUS GU10 Emergency Pack** EMC Compliant

Order Code: 711369



TEGO 3 works with **MEGAMAN® TEMPUS GU10 Emergency Pack** EMC Compliant

Order Code: EMG147247



SCAN THE QR CODE FOR MORE INFORMATION



Please refer to our website for up to date photometric information.



ACCESSORIES | TEGO 3

PERFORMA TEGO 3 IP65 TWIST-LOCK BEZELS





TEGO 3 IP65 White Bezel



TEGO 3 IP65 Black Bezel



TEGO 3 IP65 Chrome Bezel



712216 TEGO 3 IP65 Brushed Nickel Bezel



TEGO 3 IP65 Antique Brass Bezel





TEGO SLIM

























Applications

- Hotels
- Restaurants
- · Commercial and retail environments
- · Rental accommodation
- New builds

Features & Benefits

- COMPACT & SLIM DESIGN **ECONOMY LED DOWNLIGHT**
- FULLY FIRE-RATED FOR 30/60/90 MINUTE CEILING
- TRIAC DIMMING
- IP65 RATING

- UP TO 450 LUMENS
- UP TO 81LM/W
- 25,000 HOURS
- 3 YEAR WARRANTY

- · IP65 rated. Ideal for high moisture areas e.g. bathrooms
- · Tool-less wiring block and push-in terminal ensure easy install
- Flexible Loop in/Loop out feature enables for quick connection
- · Triac Dimmable as standard
- Up to 81 lumen per system watt efficacy
- · Available in either White or Brushed Nickel finishes
- Fully fire-rated for 30/60/90 minute ceilings
- Slim and compact design ideal for shallow ceiling recesses
- · Competitively priced and budget friendly everyday FR downlight
- 3 Year Warranty



website for up to







TEGO SLIM | IP65

FULLY FIRE-RATED DIMMING Integrated LED Downlight





















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711126S	IP65 SLIM FIRE-RATED DIMMING DOWNLIGHT - WHITE	5.5W	2800K	450	90°	25,000























Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
711140S	IP65 SLIM FIRE-RATED DIMMING DOWNLIGHT - WHITE	5.5W	4000K	450	90°	25,000

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C



TEGO SLIM | IP65

FULLY FIRE-RATED DIMMING Integrated LED Downlight






















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
7111285	IP65 SLIM FIRE-RATED DIMMING DOWNLIGHT - BRUSHED NICKEL	5.5W	2800K	450	90°	25,000

















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
7111425	IP65 SLIM FIRE-RATED DIMMING DOWNLIGHT - BRUSHED NICKEL	5.5W	4000K	450	90°	25,000

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30 °C to +40 °C









BATHROOM LED FIXTURES (NEW



Our new IP44 bathroom mirror and wall lights add style and elegance to any modern bathroom

Easy to install and ideal for everyday domestic use.





MEGAMAN® essentials





NEPTUNE



















Applications

- Bathrooms
- Bedrooms
- · Residential application
- Hotels

Features & Benefits

- COMPACT AND STYLISH MODERN DIMMABLE WALL LIGHT
- HIGH IP44 RATING MAKES IT IDEAL FOR BATHROOMS
- ELEGANT SHADE IN FROSTED TEMPERED GLASS
- NIGHT LIGHT MODE (60LM)
- 25,000 HOURS
- · Great value for money modern design wall light
- · Provides an elegant and practical dimmable lighting solution ideal for bathroom interiors
- Available in either white or black finish
- Integrated 3-step dimming control 100%, 50% and night light (60 lumen) setting.
- · Neptune has memory and reset function when regular wall switch is turned off/on 5 times for easy and flexible control
- Neptune provides a pleasant natural light (RA90) to bathrooms
- 3 Year Warranty



website for up to





NEPTUNE | IP44
BATHROOM DIMMING WALL LIGHT
Integrated LED









25,000







92mm



Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712504	IP44 BATHROOM WALL LAMP WHITE FINISH	9.5W	3000K	900	120°	25,000
















85mm

Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712505	IP44 BATHROOM WALL LAMP BLACK FINISH	9.5W	3000K	900	120°	25,000

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C



JUPITER













Applications

- · Bathrooms
- Bedrooms
- · Residential application
- Hotels

Features & Benefits

- SLIM RECTANGULAR DESIGN ADDS STYLE TO ANY BATHROOM
- 3 DIFFERENT AND EASY INSTALLATION METHODS INCLUDED
- HIGH IP44 RATING
- NATURAL LIGHT (RA90)
- 25.000 HOURS
- 3 YEAR WARRANTY
- Great value for money modern slim design that enhances any bathroom interior
- Provides a pleasant and practical downward light ideal for bathroom mirrors
- · Great versatility as can be mounted onto mirrors, cabinets or walls
- Available in either white or chrome finish in 2 different sizes (300mm and 500mm) and 2 different wattages (9W and 13W)
- · Natural ambient light (RA90) enables bathrooms to be well-lit
- 3 Year Warranty



Photometric data: Please refer to our website for up to date photometric information







JUPITER | IP44

BATHROOM MIRROR LIGHT Integrated LED
















3YR WARRANTY







Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712413	IP44 LED BATHROOM MIRROR LIGHT WHITE FINISH	9W	4000K	900	120°	25,000












3YR WARRANTY







Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712414	IP44 LED BATHROOM MIRROR LIGHT CHROME FINISH	9W	4000K	900	120°	25,000

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30 °C to +40 °C



JUPITER | IP44

BATHROOM MIRROR Integrated LED Light






















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712416	IP44 LED BATHROOM MIRROR LIGHT WHITE FINISH	13W	4000K	1350	120°	25,000












3YR WARRANT

25,000 HRS





Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712417	IP44 LED BATHROOM MIRROR LIGHT CHROME FINISH	13W	4000K	1350	120°	25,000

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

BATHROOM











UNDER CABINET FIXTURES

All new MEGAMAN® collection of sleek and competitively priced under cabinet LED lights, that add style and help transform any dark under cabinet and shelving area.







mEGAMAN®
essentials





KARINA 3





Applications

- Under Cabinet
- Staircases
- Wardrobes

Features & Benefits

- SLIM DESIGN IDEAL FOR UNDER CABINET AND WARDROBE INSTALL
- EASY & QUICK TOOL-LESS WIRING CONNECTION
- ROTATABLE LUMINAIRE TO 170° DEGREE ANGLE
- SELECTABLE 3 CCT
- EASY STEP-DIMMING CONTROL
- 25.000 HOURS
- 3 YEAR WARRANTY







- New MEGAMAN® KARINA 3 is a versatile auxiliary lighting solution ideal for installation in and under kitchen cabinets and also for wardrobe furniture
- Easy 3 step-dim control: 100%/50%/10%
- Ultra slim 24mm height makes KARINA 3 perfect for under cabinet installation
- Tool-less wiring makes connection fast and easy
- · Wide light emitting area
- · True replacement for traditional T5 and T8 battens
- 3 Year Warranty



KARINA 3 | IP20

ROTATABLE STEP-DIM SLIM UNDER CABINET LIGHT Integrated LED







3YR WARRANTY



25,000 HRS




IP20









Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712514	STEP-DIM UNDER CABINET LED LIGHT WITH SELECTABLE 3CCT. WHITE FINISH	4W	3000K 4000K 6500K	400	110°	25,000



















Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712515	STEP-DIM UNDER CABINET LED LIGHT WITH SELECTABLE 3CCT. WHITE FINISH	8W	3000K 4000K 6500K	800	110°	25,000





KARINA 3 | IP20

ROTATABLE STEP-DIM SLIM UNDER CABINET LIGHT Integrated LED

























Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712516	STEP-DIM UNDER CABINET LED LIGHT WITH SELECTABLE 3CCT. WHITE FINISH	12W	3000K 4000K 6500K	1200	110°	25,000

UNDER CABINET







LAGOM



















Simple and Fast Magnet Mounting



Applications

- Under Cabinet
- Staircases
- Wardrobes
- Kitchen Cabinet

Features & Benefits

- ULTRA-SLIM DESIGN IDEAL **FOR UNDER CABINET AND** WARDROBE INSTALL
- EASY & QUICK TOOL-LESS WIRING CONNECTION
- FINGER TAP SENSITIVE
- EASY STEP-DIMMING **CONTROL BY FINGER TAP**
- 25,000 HOURS
- 3 YEAR WARRANTY
- ON/OFF CONTROL
- New MEGAMAN® LAGOM is a versatile auxillary lighting solution ideal for installation in and under kitchen cabinets and also for wardrobe furniture
- · ON/OFF control achieved by easy finger tap
- · Ultra-slim 11mm height makes LAGOM perfect for under cabinet installation
- Tool-less wiring makes connection fast and easy
- · Wide light emitting area
- Type C Rechargeable battery offers greater energy saving
- 3 Year Warranty









LAGOM | IP20

ULTRA-SLIM UNDER CABINET LIGHT Dimmable Integrated LED










25,000 HRS



IP20







Code	Description	Watts	K	Lumens	Hrs Life
712534	IP20 LED ULTRA-SLIM UNDER CABINET LIGHT WITH TOUCH DIM CONTROL	2.7W (CHARGING) 1W (USING)	4000K	100	25,000



















Code	Description	Watts	K	Lumens	Hrs Life
712535	IP20 LED ULTRA-SLIM UNDER CABINET LIGHT WITH TOUCH DIM CONTROL	3W (CHARGING) 1.5W (USING)	4000K	150	25,000





TRACK LIGHT FITTINGS

Compact and modern design MORA and MOSAIC provide cost-effective, flexible & multi directional accent lighting solutions. Both are compatible with most available GU10 PAR16 LED lamps.







MEGAMAN®essentials



MORA















Applications

- Galleries
- Restaurants
- Showrooms
- Hotels
- · Retail outlets
- Reception areas
- Residential

Features & Benefits

- COMPACT SERVICEABLE **GU10 TRACK LIGHT**
- FLEXIBLE MULTI-DIRECTION ACCENT LIGHTING
- COMPATIBLE WITH MOST
- AVAILABLE IN BOTH WHITE AND BLACK FINISHES
- 3 YEAR WARRANTY
- **AVAILABLE GU10 PAR16 LEDs**
- MEGAMAN® MORA is a flexible compact adjustable track light fitting for use with GU10 PAR16 LED reflectors
- Flexible adjustable arm offers multi-directional 330° horizontal rotation and 90° tilt angle lighting
- · Offers cost-effective lighting solution for common accent lighting applications
- · Adjustable lamp holder for easy installation
- · Track version has 3 circuit track adaptor as standard compatible with most 3 circuit systems
- 3 Year Warranty





ssentials



MORA | IP20

STYLISH MODERN TRACK LIGHT FITTING Compatible with **GU10** PAR16 LED Lamps








330 Degree Rotate











Code	Description	Max Wattage	Light Source	Lamp Base	Tilt Angle	Rotation
709166	TRACK LIGHT (FIXTURE ONLY) WITH ADJUSTABLE ARM. WHITE FINISH	8W (MAX)	LED PAR16	GU10	90°	330°





330 DEGREE ROTATE



3YR WARRANTY





Code	Description	Max Wattage	Light Source	Lamp Base	Tilt Angle	Rotation
709167	TRACK LIGHT (FIXTURE ONLY) WITH ADJUSTABLE ARM. BLACK FINISH	8W (MAX)	LED PAR16	GU10	90°	330°





MOSAIC

















Applications

- Galleries
- Restaurants
- Showrooms
- Hotels
- · Retail outlets
- · Reception areas

Features & Benefits

- COMPACT MODERN DESIGN **ADJUSTABLE LIGHT FITTING**
- FLEXIBLE MULTI-DIRECTION ACCENT LIGHTING
- COMPATIBLE WITH ALL
- AVAILABLE IN STYLISH WHITE FINISH
- 3 YEAR WARRANTY
- **MEGAMAN® GU10 PAR16 LEDs**
- MEGAMAN® MOSAIC is a flexible compact adjustable track light fitting for use with GU10 PAR16 LED reflectors
- Flexible multi-directional lighting: adjustable 330° rotation and 90° tilt angle, Ideal for use in galleries, restaurants, showrooms, hotels, retail outlets, reception areas, etc.
- · Offers visual comfort with minimal glare
- · Adjustable lamp holder for easy installation
- · Track version has 3 circuit track adaptor as standard compatible with most 3 circuit systems
- 3 Year Warranty





ssentials



MOSAIC | IP20

STYLISH MODERN TRACK LIGHT FITTING Compatible with GU10 PAR16 LED Lamps


















Code	Description	Max Wattage	Light Source	Lamp Base	Tilt Angle	Rotation
190516	TRACK LIGHT (FIXTURE ONLY) WITH ADJUSTABLE ARM. WHITE FINISH	8W (MAX)	LED PAR16	GU10	90°	330°

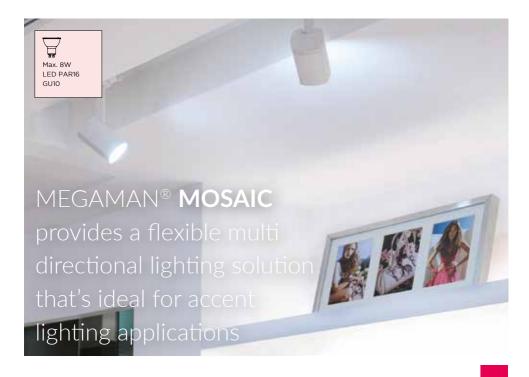













MEGAMAN® TEMPUS is a comprehensive range of easy to install 3 hour emergency lighting solutions that are ideal for effective UK compliant, safe building exit in emergency situations



SLIM BULKHEAD IP65 ANTI-CORROSION



148

ANTI-CORROSION METAL





150

EXIT SIGN WALL MOUNTED



DOUBLE-SIDED SUSPENDED



EXIT SIGN DOUBLE-SIDED RECESSED



TWIN SPOTLIGHT IP65 ANTI-CORROSION



OPEN AREA **DOWNLIGHT IP54**



DOWNLIGHT IP54



HIGH BAY DOWNLIGHT IP54



LOW BAY DOWNLIGHT IP54



OPEN AREA DOWNLIGHT RECESSED



DOWNLIGHT RECESSED





SLIM BULKHEAD | IP65

MAINTAINED/NON-MAINTAINED & SELF-TEST
Anti-Corrosion Polycarbonate Emergency LED Bulkhead











IK03




SURFACE MOUNTED









Code	Description	Watts	K	Lumens	Battery	Battery Duration
710474	IP65 EMERGENCY SLIM BULKHEAD MAINTAINED/NON-MAINTAINED ALL DIRECTION STICKERS INCLUDED	4W	6500K	140	3.6V 1500mAh-LiFePO ₄	3 Hours

SELF-TEST


















Code	Description	Watts	K	Lumens	Battery	Battery Duration
711052	IP65 EMERGENCY SLIM BULKHEAD SELF TEST MAINTAINED/NON-MAINTAINED ALL DIRECTION STICKERS INCLUDED	4W	6500K	140	3.6V 1500mAh-LiFePO ₄	3 Hours

Operating temperature 0°C to +40°C



METAL EXIT LIGHT BOX | IP20

MAINTAINED/NON-MAINTAINED & SELF-TEST Anti-Corrosion Steel Emergency LED Light Box







2YR WARRANT



IP20



IK03




SURFACE MOUNTED











Code	Description	Watts	K	Lumens	Battery	Battery Duration
710476	IP20 EMERGENCY EXIT LIGHT BOX MAINTAINED/NON-MAINTAINED ARROW DOWN LEGEND INCLUDED	5W	6500K	35	3.6V 1800mAh-Ni-Cd	3 Hours

ACCESSORIES AVAILABLE - PAGE 160

SELF-TEST



3 HRS	
EMERGENCY	










2YR WARRANT SURFACE MOUNTED IP20 **IK03**



Code	Description	Watts	K	Lumens	Battery	Battery Duration
711051	IP20 EMERGENCY SLIM BULKHEAD SELF TEST MAINTAINED/NON-MAINTAINED ARROW DOWN LEGEND INCLUDED	5W	6500K	35	3.6V 1800mAh-Ni-Cd	3 Hours

ACCESSORIES AVAILABLE - PAGE 160

Operating temperature 0°C to +40°C



EXIT SIGN | IP20

MAINTAINED & SELF-TEST

Wall Mounted Polycarbonate Emergency Exit Sign































Code	Description	Watts	K	Lumens	Battery	Battery Duration
710488	IP20 EMERGENCY EXIT SIGN MAINTAINED ARROW LEFT/RIGHT LEGENDS INCLUDED	3.5W	6500K	35	3.6V 1000mAh-Ni-MH	3 Hours

SELF-TEST















Code	Description	Watts	K	Lumens	Battery	Battery Duration
711050	IP20 EMERGENCY SLIM BULKHEAD SELF-TEST MAINTAINED ARROW LEFT/RIGHT LEGENDS INCLUDED	3.5W	6500K	35	3.6V 1000mAh-Ni-MH	3 Hours

Operating temperature 0°C to +40°C

24mm

316mm



DOUBLE-SIDED EXIT SIGN | IP20

MAINTAINED
Suspended Polycarbonate Emergency Exit Sign













CEILING & CORD







24mm

		350mm Max
	H	

Code	Description	Watts	K	Lumens	Battery	Battery Duration
710487	IP20 EMERGENCY EXIT SIGN MAINTAINED ARROW LEFT/RIGHT LEGENDS INCLUDED	3.5W	6500K	35	3.6V 1000mAh-Ni-MH	3 Hours

ACCESSORIES AVAILABLE - PAGE 160

Operating temperature 0°C to +40°C

316mm





DOUBLE-SIDED EXIT SIGN | IP20

MAINTAINED & SELF-TEST Recessed Polycarbonate & Metal Emergency Exit Sign


















365mm











90mm x 255mm

Code	Description	Watts	K	Lumens	Battery	Battery Duration
710978	IP20 EMERGENCY EXIT SIGN RECESSED DOUBLE-SIDED PICTOGRAM MAINTAINED	3.5W	6500K	35	3.6V 1000mAh-Ni-MH	3 Hours

SELF-TEST





2YR WARRANT



IP20




IK03









Code	Description	Watts	K	Lumens	Battery	Battery Duration
711049	IP20 EMERGENCY EXIT SIGN RECESSED DOUBLE-SIDED PICTOGRAM SELF-TEST MAINTAINED	3.5W	6500K	35	3.6V 1000mAh-Ni-MH	3 Hours

Operating temperature 0°C to +40°C



TWIN SPOT LIGHT | IP65

NON-MAINTAINED
Anti-Corrosion Polycarbonate Emergency Spot Light













FLEXIBLE & EASY INSTALL









					6211111	30011111	
Code	Description	Watts	K	Lumens	Battery	Battery Duration	
710485	IP65 EMERGENCY ROTATE & TILT TWIN SPOT LIGHT NON-MAINTAINED	2.3W	6500K	400	1500mAh-Ni-Cd	3 Hours	

Operating temperature 0°C to +40°C

The MEGAMAN® **TEMPUS**Emergency Lighting range includes products with built-in **Self-Test** feature for greater convenience, compliance and reducing costly manual testing and fault identification





OPEN AREA DOWNLIGHT | IP54

NON-MAINTAINED & SELF-TEST Compact Surface Mounted Emergency Downlight









































35mm

130mm

Code	Description	Watts	K	Lumens	Battery	Battery Duration
710482	IP54 EMERGENCY OPEN AREA DOWNLIGHT NON-MAINTAINED	1W	6000K	130	3.3V 1500mAh-LiFePO ₄	3 Hours

SELF-TEST







IP54



IK₀₂



50,000

OVER Emperatur

SURFACE MOUNTED








2YR WARRANT







Code	Description	Watts	K	Lumens	Battery	Battery Duration
711046	IP54 EMERGENCY OPEN AREA DOWNLIGHT SELF-TEST NON-MAINTAINED	1W	6000K	130	3.2V 1500mAh-LiFePO ₄	3 Hours

Operating temperature 0°C to +40°C



CORRIDOR DOWNLIGHT | IP54

NON-MAINTAINED & SELF-TEST
Compact Surface Mounted Emergency Downlight











IK₀₂



50,000



SURFACE



TOUCH TESTING BUTTON











35mm

130mm

Code	Description	Watts	K	Lumens	Battery	Battery Duration
710483	IP54 EMERGENCY CORRIDOR DOWNLIGHT NON-MAINTAINED	1W	6000K	130	3.2V 1500mAh-LiFePO ₄	3 Hours

SELF-TEST

Code

711047



Description

IP54 EMERGENCY OPEN AREA

DOWNLIGHT SELF-TEST

NON-MAINTAINED





IP54

Watts

1W



IK₀₂



50.000

Lumens

130



SURFACE MOUNTED







2YR WARRANT



35mm



Battery	Battery Duration	
3.2V	3 Hours	
1500mAh-LiFePO ₄		

Operating temperature 0°C to +40°C

6000K



HIGH BAY DOWNLIGHT | IP54

SELF-TEST HIGH LUMEN

Compact Surface Mounted Emergency Downlight



SELF-TEST



NON-MAINTAINED



2YR WARRANT



IK₀₂



SURFACE




TOUCH TESTING BUTTON











Code	Description	Watts	K	Lumens	Battery	Battery Duration
711365	IP54 EMERGENCY HIGH BAY DOWNLIGHT SELF-TEST	3W	6000K	200	3.3V 1500mAh-LiFePO	3 Hours

Operating temperature 0°C to +40°C



SCAN THE QR CODE FOR MORE INFORMATION



Please refer to our website for up to date photometric information.



LOW BAY DOWNLIGHT | IP54

SELF-TEST HIGH LUMEN

Compact Surface Mounted Emergency Downlight



SELF-TEST





2YR WARRANT





IKO2



SURFACE



TOUCH TESTING BUTTON














Code	Description	Watts	K	Lumens	Battery	Battery Duration
711366	IP54 EMERGENCY LOW BAY DOWNLIGHT SELF-TEST NON-MAINTAINED	3W	6000K	200	3.2V 1500mAh-LiFePO ₄	3 Hours

Operating temperature 0°C to +40°C



SCAN THE QR CODE FOR MORE INFORMATION



Please refer to our website for up to date photometric information.



OPEN AREA DOWNLIGHT | IP20

NON-MAINTAINED & SELF-TEST Slim & Compact Recessed Emergency Downlight



































40mm

Code	Description	Watts	K	Lumens	Battery	Battery Duration
710480	IP20 EMERGENCY OPEN AREA DOWNLIGHT NON-MAINTAINED	3W	6000K	120	3.3V 1500mAh-LiFePO ₄	3 Hours

SELF-TEST







IP20



IK₀₂



50.000



TOUCH TESTING BUTTON



2YR WARRANT



Code	Description	Watts	K	Lumens	Battery	Battery Duration
711044	IP20 EMERGENCY OPEN AREA DOWNLIGHT SELF-TEST NON-MAINTAINED	3W	6000K	120	3.2V 1500mAh-LiFePO ₄	3 Hours

Operating temperature 0°C to +40°C

40mm



CORRIDOR DOWNLIGHT | IP54

NON-MAINTAINED & SELF-TEST Slim & Compact Recessed Emergency Downlight







2YR



IK₀₂



50,000

HRS



SURFACE MOUNTED














Code	Description	Watts	K	Lumens	Battery	Battery Duration
710481	IP54 EMERGENCY CORRIDOR DOWNLIGHT NON-MAINTAINED	3W	6000K	120	3.2V 1500mAh-LiFePO ₄	3 Hours

SELF-TEST







IP54



IK₀₂




50,000

OVER Temperatur

SHORT CIRCUIT

TOUCH TESTING BUTTON



Code	Description	Watts	K	Lumens	Battery	Battery Duration
711045	IP54 EMERGENCY OPEN AREA DOWNLIGHT SELF-TEST NON-MAINTAINED	3W	6000K	120	3.2V 1500mAh-LiFePO ₄	3 Hours

Operating temperature 0°C to +40°C



ACCESSORIES | EMERGENCY LIGHTING

EXTRA DIRECTIONAL LEGENDS AND PVC FILM SIGNS



Extra Arrow Left Sign for 710476/711051 **Emergency Metal** Light Box. 380mm x 185mm



Extra Arrow Right Sign for 710476/711051 **Emergency Metal Light Box** 380mm x 185mm



Extra Arrow Up Sign for 710476/711051 **Emergency Metal Light Box** 380mm x 185mm



Direction PVC Film Arrow Left/Right for 710487/711050 and 710488/711049 Emergency Polycarbonate **Exit Signs** 295mm x 155mm




Direction PVC Film for 710487/711050 and 710488/711049 Emergency Polycarbonate Exit Signs 295mm x 155mm



Take a look at the complete MEGAMAN® **TEMPUS** range of affordable and UK compliant emergency LED lighting solutions





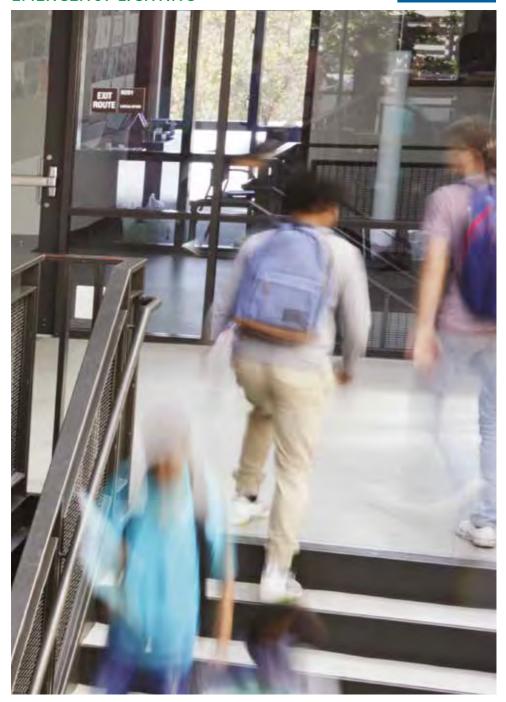







ACCESSORIES

MEGAMAN® MEGAQUICK is a hassle free and tool-free easy to use compact lever connector.

Designed to save time and add flexibility for installers and end users alike.

MEGAMAN®

Performa





MEGAquick





Applications

- · Lighting fixtures
- Electrical appliances

Features & Benefits

- COMPACT AND EASY TO USE LOOP IN/LOOP OUT LEVER CONNECTOR
- COST-EFFECTIVE SOLUTION FOR ULTRA FAST AND SAFE 1ST & 2ND FIX INSTALLS
- DESIGNED TO AID HASSLE FREE & TOOL-FREE WIRING FOR CONTRACTORS
- UNIQUE TRANSLUCENT COVERS FOR WIRING COMPLIANCE INSPECTION
- MEGAMAN® MEGAquick is a compact, cost-effective, and easy to use loop in/loop out lever connector
- Unique translucent quick release and lock covers to aid safe 1st and 2nd fix inspection
- Open and easy access for time and money saving tool-less wiring
- · Suitable for up to 2.5mm² wiring
- 2 direction strain relief design for stronger, longer lasting and improved wiring
- Simple mega-quick fix 3 Pole Push-in Connectors
- 16A 250V
- · Supplied in 40 piece display pack

MEGAMAN®



MEGAquick
LOOP IN/LOOP OUT LEVER CONNECTOR
Compact with Translucent Covers









LED LAMPS





MR16



PAR20/PAR30/PAR38































Our trusted and ever developing range of low energy **Economy and Professional** LED lamps.

Up to 3 years warranty and 50,000 hours rated life.



GU10 PAR16 Economy LED Lamp





3.3W GU10

PAR16 LED

- 124LM/WATT
- 410 LUMENS
- 15,000 HRS
- 2700K, 4000K, 6500K







140510E / 140512E / 140514E





Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
140510E	3.3W	2700K/80	410	N	GU10	36°	15,000	55x50
140512E	3.3W	4000K/80	410	N	GU10	36°	15,000	55×50
140514E	3.3W	6500K/80	410	N	GU10	36°	15,000	55×50



4.2W GU10 5 PACK

PAR16 LED


- 86LM/WATT
- 360 LUMENS
- 15,000 HRS
- 2700K, 4000K, 6500K







710390E / 710391E / 711921



Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
710390E	4.2W	2700K/80	360	N	GU10	36°	15,000	55x50
710391E	4.2W	4000K/80	360	N	GU10	36°	15,000	55x50
711921	4.2W	6500K/80	360	N	GU10	36°	15,000	55x50



GU10 DIMMING

PAR16 **Economy LED Lamp**



ж

140500E / 140502E / 711920



3.3W GU10 **DIMMING**

PAR16 LED

- 124LM/WATT
- 410 LUMENS
- 25,000 HRS
- 2700K, 4000K, 6500K









Order Code	Watts	Colour (K) /CRI	Lumens (Im)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
140500E	3.3W	2700K/80	410	Υ	GU10	36°	25,000	55x50
140502E	3.3W	4000K/80	410	Υ	GU10	36°	25,000	55x50
711920	3.3W	6500K/80	410	Υ	GU10	36°	25,000	55x50



GU10 DIMMING / DUAL BEAM

PAR16
Professional LED Lamp





4.1W/5.5W GU10 DIMMING

PAR16 LED


- 91/122LM/WATT
- 500 LUMENS
- 25,000 HRS
- 2700K, 4000K, 6500K







140504E / 140506E / 140508E



Order Code	Watts	Colour (K) /CRI	Lumens (Im)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
140504E	4.1W	2700K/80	500	Υ	GU10	36°	25,000	55x50
140506E	4.1W	4000K/80	500	Υ	GU10	36°	25,000	55x50
140508E	5.5W	6500K/80	500	Υ	GU10	36°	25,000	55×50



5.3W GU10 DIMMING

DUAL BEAM

PAR16 LED

- 104LM/WATT
- 550 LUMENS
- 25,000 HRS
- 2700K, 4000K
- 24°/35° DUAL BEAM





















Order Code	Watts	Colour (K) /CRI	Lumens (Im)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
140516E	5.3W	2700K/80	550	Υ	GU10	24°/35°	25,000	55x50
140518	5.3W	4000K/80	550	Υ	GU10	24°/35°	25,000	55×50



GU10 DIMMING

PAR16 **Economy LED Lamp**





4.3W GU10 **DIMMING 74MM**

PAR16 LED

- 106LM/WATT
- 460 LUMENS
- 25,000 HRS
- 2700K, 4000K



142220E / 142222E / 142224E









Order Code	Watts	Colour (K) /CRI	Lumens (Im)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
141510E	4.3W	2700K/80	460	Υ	GU10	90°	25,000	74×50
141580E	4.3W	4000K/80	460	Υ	GU10	90°	25,000	74x50



4.7W GU10 **DIMMING GLASS FINISH**

PAR16 LED

- 83LM/WATT
- 390 LUMENS
- 15,000 HRS
- 2700K, 4000K, 6500K







Order Code	Watts	Colour (K) /CRI	Lumens (Im)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
142220E	4.7W	2700K/80	390	Υ	GU10	36°	15,000	55x50
142222E	4.7W	4000K/80	390	Υ	GU10	36°	15,000	55x50
142224E	4.7W	6500K/80	390	Υ	GU10	36°	15,000	55x50

141510E / 141580E

4 1	100	tion or	de national	
1	1	1.0	-	10.46
17-	120	17		. 14
11/1	17 \X		-	
144	17.12	818	(80)	100
1011	10	-	-5%	. 5-
1	1 10			



MR16 GLASS

GU5.3 Economy LED Lamp






4.4W MR16 GLASS

GU5.3 LED

- 93LM/WATT
- 410 LUMENS
- 15,000 HRS
- 2700K, 4000K



142640E / 142642E









Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
142640E	4.4W	2700K/80	410	N	GU5.3	36°	15,000	46x50
142642E	4.4W	4000K/80	410	N	GU5.3	36°	15,000	46x50



AR111 DIMMING

G53/GU10 **Economy LED Lamp**



m



11.5W AR111 **DIMMING DUAL BEAM**

G53 LED

- 82LM/WATT
- 900/950 LUMENS
- 40,000 HRS
- 2800K
- 24°/45° DUAL BEAM










142620E







Order Code	Watts	Colour (K) /CRI	Lumens (Im)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
142620E	11.5W	2800K/80	900/950	Υ	G53	24°/ 45°	40,000	58x111



11W AR111 **DIMMING DUAL BEAM**

GU10 LED

- 86LM/WATT
- 870/950 LUMENS
- 40,000 HRS
- 2700K, 4000K
- 24°/45° DUAL BEAM












142624E /	142626E





Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
142624E	11W	2700K/80	870/950	Υ	GU10	24°/ 45°	40,000	82x111
142626E	11W	4000K/80	870/950	Υ	GU10	24°/ 45°	40,000	82x111



OPAL REFLECTORS

R50, R63 & R80 Economy LED Lamp





4.9W R50 OPAL REFLECTOR

E14 LED

- 96LM/WATT 15.000 HRS
- 470 LUMENS 2700K







Order Code	Watts	Colour (K) /CRI	Lumens (Im)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
711721	4.9W	2700K/80	470	N	E14	100°	15,000	81x50



4.9W R63 OPAL REFLECTOR

E27 LED

- 96LM/WATT 15,000 HRS
- 470 LUMENS 2700K







Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
709894	4.9W	2700K/80	470	N	E27	100°	15,000	102×63



8.6W R80 OPAL REFLECTOR

E27 LED

- 94LM/WATT 15,000 HRS
- 810 LUMENS 2700K







Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
709224	8.6W	2700K/80	810	N	E27	100°	15,000	110x80



PAR REFLECTORS

PAR20, PAR30 & PAR38
IP65 Outdoor Use Economy LED Lamp



IP65



7W PAR20 36° REFLECTOR

E27 LED

- 114LM/WATT 25,000 HRS
- 800 LUMENS 3000K





Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
711726	7W	3000K/80	800	N	E27	36°	25,000	63x90



11W PAR30 36° REFLECTOR

E27 LED

- 118LM/WATT 25,000 HRS
- 1300 LUMENS 3000K









Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
711496	11W	3000K/80	1300	N	E27	36°	25,000	95x105



16W PAR38 36° REFLECTOR

E27 LED

- 116LM/WATT 25,000 HRS
- 1850 LUMENS 3000K









Order Code	Watts	Colour (K) /CRI	Lumens (Im)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
711489	16W	3000K/80	1850	N	E27	36°	25,000	120x135



OPAL CLASSIC GLS

NON-DIMMABLE LED Lamp





4.8W OPAL CLASSIC GLS

E27 & B22 LED

- 98LM/WATT 15,000 HRS
- 470 LUMENS 2700K









Order Code	Watts	Colour (K)/CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
143360E	4.8W	2700K/80	470	N	E27	330°	15,000	109x60
143362E	4.8W	2700K/80	470	N	B22	330°	15,000	109x60



OPAL CLASSIC GLS

NON-DIMMABLE & DIMMABLE LED Lamp





8.6W OPAL CLASSIC GLS

E27 & B22 LED

- 94LM/WATT 2700K,
- 810 LUMENS 4000K,
- 15,000 HRS

6500K









Order Code	Watts	Colour (K) /CRI	Lumens (Im)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
143316E	8.6W	2700K/80	810	N	E27	330°	15,000	109x60
143318E	8.6W	2700K/80	810	N	B22	330°	15,000	109x60
143370E	8.6W	4000K/80	810	N	B22	330°	15,000	109x60
143372E	8.6W	4000K/80	810	N	E27	330°	15,000	109x60
143374E	8.6W	6500K/80	810	N	E27	330°	15,000	109x60
143376E	8.6W	6500K/80	810	N	B22	330°	15,000	109x60



8.5W OPAL CLASSIC GLS

DIMMING

E27 & B22 LED

- 95LM/WATT 2700K,
- 810 LUMENS 4000K,
- 25,000 HRS

4000K, 6500K











Order Code	Watts	Colour (K) /CRI	Lumens (Im)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
711181	8.5W	2700K/80	810	Υ	B22	330°	25,000	109x60
711182	8.5W	2700K/80	810	Υ	E27	330°	25,000	109x60
711115	8.5W	4000K/80	810	Υ	B22	330°	25,000	109x60
711116	8.5W	4000K/80	810	Υ	E27	330°	25,000	109x60
711925	8.5W	6500K/80	810	Υ	B22	330°	25,000	109x60
711262	8.5W	6500K/80	810	Υ	E27	330°	25,000	109x60



OPAL CLASSIC GLS

NON-DIMMABLE LED Lamp





9.6W OPAL CLASSIC GLS

E27 & B22 LED

- 110LM/WATT 15,000 HRS
- 1055 LUMENS 2700K









Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
142532E	9.6W	2700K/80	1055	N	E27	330°	15,000	109x60
142534E	9.6W	2700K/80	1055	N	B22	330°	15,000	109x60



9W/9.6W OPAL CLASSIC GLS

TRADE 10 PACK

E27 & B22 LED

- 110/117LM/WATT 15,000 HRS
- 1055 LUMENS 2700K, 4000K 6500K









Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
710464E	9W	2700K/80	1055	N	B22	330°	15,000	109×60
710466E	9.6W	2700K/80	1055	N	E27	330°	15,000	109x60
710467E	9.6W	4000K/80	1055	N	E27	330°	15,000	109×60
710465E	9W	4000K/80	1055	N	B22	330°	15,000	109x60
711922	9.6W	6500K/80	1055	N	E27	330°	15,000	109x60
711923	9.6W	6500K/80	1055	N	B22	330°	15,000	109x60



OPAL CLASSIC GLS

NON-DIMMABLE & DIMMABLE LED Lamp





13.3W OPAL CLASSIC GLS

E27 & B22 LED

- 114LM/WATT 15,000 HRS
- 1521 LUMENS 2700K









Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
148390E	13.3W	2700K/80	1521	N	E27	330°	15,000	114x60
148392E	13.3W	2700K/80	1521	N	B22	330°	15,000	114x60



OPAL CANDLE

NON-DIMMABLE & DIMMABLE LED Lamp





2.9W OPAL CANDLE

E14, E27, B15 & B22 LED

- 86LM/WATT 15,000 HRS
- 250 LUMENS 2700K









Order Code	Watts	Colour (K) /CRI	Lumens (Im)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
143300E	2.9W	2700K/80	250	N	E14	330°	15,000	100x35
143302E	2.9W	2700K/80	250	N	E27	330°	15,000	100x35
143304E	2.9W	2700K/80	250	N	B15	330°	15,000	100x35
143306E	2.9W	2700K/80	250	N	B22	330°	15,000	100x35



2.9W OPAL CANDLE

DIMMING

E14 LED

- 86LM/WATT 15,000 HRS
- 250 LUMENS 2700K











Order Code	Watts	Colour (K) /CRI	Lumens (Im)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
711163	2.9W	2700K/80	250	Υ	E14	330°	15,000	100x35



OPAL CANDLE

NON-DIMMABLE & DIMMABLE LED Lamp





4.9W OPAL CANDLE

E14, E27, B15 & B22 LED

- 96LM/WATT 15,000 HRS
- 470 LUMENS 2700K, 4000K









Order Code	Watts	Colour (K) /CRI	Lumens (Im)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
143308E	4.9W	2700K/80	470	N	E14	330°	15,000	100x35
143310E	4.9W	2700K/80	470	N	E27	330°	15,000	100x35
143312E	4.9W	2700K/80	470	N	B15	330°	15,000	100x35
143314E	4.9W	2700K/80	470	N	B22	330°	15,000	100x35
143350E	4.9W	4000K/80	470	N	E14	330°	15,000	100x35
143352E	4.9W	4000K/80	470	N	E27	330°	15,000	100x35
143354E	4.9W	4000K/80	470	N	B15	330°	15,000	100x35
143356E	4.9W	4000K/80	470	N	B22	330°	15,000	100x35



5.5W OPAL CANDLE DIMMING

- 86LM/WATT 25,000 HRS
- 470 LUMENS 2700K, 4000K











Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
711403	5.5W	2700K/80	470	Υ	E14	330°	25,000	100x35
711107	5.5W	2700K/80	470	Υ	B22	330°	25,000	100x35
711511	5.5W	2700K/80	470	Υ	E27	330°	25,000	100x35
711512	5.5W	2700K/80	470	Υ	B15	330°	25,000	100x35
711108	5.5W	4000K/80	470	Υ	E14	330°	25,000	100x35



OPAL GOLF BALL

NON-DIMMABLE LED Lamp





2.9W OPAL GOLF BALL

E14, E27 & B22 LED

• 86LM/WATT • 15,000 HRS

• 250 LUMENS • 2700K, 4000K









Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
143390E	2.9W	2700K/80	250	N	E14	330°	15,000	87x45
143392E	2.9W	2700K/80	250	N	E27	330°	15,000	87x45
143394E	2.9W	2700K/80	250	N	B22	330°	15,000	87x45
142254E	2.9W	4000K/80	250	N	E27	330°	15,000	87x45



OPAL GOLF BALL

DIMMABLE LED Lamp





5.5W OPAL GOLF BALL DIMMING

E14, E27 & B22 LED

- 86LM/WATT 25,000 HRS
- 470 LUMENS 2700K, 4000K











Order Code	Watts	Colour (K) /CRI	Lumens (Im)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
711109	5.5W	2700K/80	470	Υ	B22	330°	25,000	87x45
711110	5.5W	4000K/80	470	Y	B22	330°	25,000	87×45
711111	5.5W	2700K/80	470	Y	E14	330°	25,000	87x45
711112	5.5W	4000K/80	470	Y	E14	330°	25,000	87x45
711113	5.5W	2700K/80	470	Y	E27	330°	25,000	87x45
711114	5.5W	4000K/80	470	Υ	E27	330°	25,000	87x45



FILAMENT CLASSIC GLS

NON-DIMMABLE LED Lamp





4W FILAMENT CLASSIC GLS

E27, B22 LED

- 118LM/WATT 15,000 HRS
- 470 LUMENS 2700K









Order Code	Watts	Colour (K) /CRI	Lumens (Im)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
146210E	4W	2700K/80	470	N	E27	360°	15,000	104x60
146376E	4W	2700K/80	470	N	B22	360°	15,000	104x60



FILAMENT CLASSIC GLS

NON-DIMMABLE & DIMMABLE LED Lamp





6.8W FILAMENT CLASSIC GLS

E27, B22 LED

- 119LM/WATT 15,000 HRS
- 810 LUMENS 2700K









Order Code	Watts	Colour (K) /CRI	Lumens (Im)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
146212E	6.8W	2700K/80	810	N	E27	360°	15,000	104x60
707171E	6.8W	2700K/80	810	N	B22	360°	15,000	104x60



7.2W FILAMENT CLASSIC GLS

DIMMING

E27, B22 LED

- 113LM/WATT 15,000 HRS
- 810 LUMENS 2700K











Order Code	Watts	Colour (K) /CRI	Lumens (Im)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
711166	7.2W	2700K/80	810	Υ	E27	360°	15,000	104x60
712087	7.2W	2700K/80	810	Y	B22	360°	15,000	104x60



FILAMENT CLASSIC GLS

NON-DIMMABLE & DIMMABLE LED Lamp





7.8W FILAMENT CLASSIC GLS

E27. B22 LED

- 135LM/WATT 15,000 HRS
- 1055 LUMENS 2700K









Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
146214E	7.8W	2700K/80	1055	N	E27	360°	15,000	104x60
710337E	7.8W	2700K/80	1055	N	B22	360°	15,000	104x60



7.8W FILAMENT CLASSIC GLS

DIMMING

E27, B22 LED

- 135LM/WATT 15,000 HRS
- 1055 LUMENS 2700K










Order Code	Watts	Colour (K) /CRI	Lumens (Im)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
711133	7.8W	2700K/80	1055	Υ	E27	360°	15,000	104x60
711481	7.8W	2700K/80	1055	Y	B22	360°	15,000	104x60

FILAMENT GLS LEDS



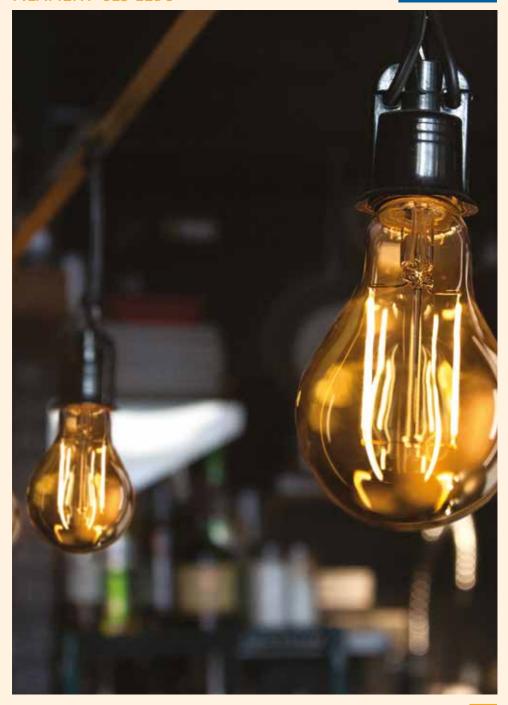



FILAMENT CANDLE

NON-DIMMABLE LED Lamp





2.1W FILAMENT CANDLE

E14 LED

- 119LM/WATT 15,000 HRS
- 250 LUMENS 2700K









Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
146222E	2.1W	2700K/80	250	N	E14	360°	15,000	97x35



FILAMENT CANDLE

NON-DIMMABLE & DIMMABLE LED Lamp





4W FILAMENT CANDLE

E14, E27, B15 & B22 LED

- 112LM/WATT 15,000 HRS
- 470 LUMENS 2700K









Order Code	Watts	Colour (K) /CRI	Lumens (Im)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
146224E	4W	2700K/80	470	N	E14	360°	15,000	97x35
710506E	4W	2700K/80	470	N	B22	360°	15,000	97x35
709927E	4W	2700K/80	470	N	E27	360°	15,000	97x35
710505E	4W	2700K/80	470	N	B15	360°	15,000	97x35



4.2W FILAMENT CANDLE

DIMMING

- 112LM/WATT 15,000 HRS
- 470 LUMENS 2700K











Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
711370	4.2W	2700K/80	470	Υ	E27	360°	15,000	97x35
710509E	4.2W	2700K/80	470	Υ	B22	360°	15,000	97x35
711371	4.2W	2700K/80	470	Υ	B15	360°	15,000	97x35
146226E	4.2W	2700K/80	470	Υ	E14	360°	15,000	97x35



FILAMENT GOLF BALL

NON-DIMMABLE LED Lamp





4W FILAMENT GOLF BALL

- 118LM/WATT 15,000 HRS
- 470 LUMENS 2700K









Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
146230E	4W	2700K/80	470	N	E14	360°	15,000	79x45
709926E	4W	2700K/80	470	N	E27	360°	15,000	79x45
712090	4W	2700K/80	470	N	B15	360°	15,000	79x45
712091	4W	2700K/80	470	N	B22	360°	15,000	79x45



FILAMENT GOLF BALL

DIMMABLE LED Lamp





4.2W FILAMENT GOLF BALL

- 112LM/WATT 15,000 HRS
- 470 LUMENS 2700K









Order Code	Watts	Colour (K) /CRI	Lumens (Im)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
711385	4.2W	2700K/80	470	Υ	E14	360°	15,000	79x45
711455	4.2W	2700K/80	470	Y	E27	360°	15,000	79x45
712088	4.2W	2700K/80	470	Υ	B15	360°	15,000	79x45
712089	4.2W	2700K/80	470	Υ	B22	360°	15,000	79x45



FILAMENT ST64

NON-DIMMABLE LED Lamp





4W FILAMENT ST64

E27 LED

- 118LM/WATT 15,000 HRS
- 470 LUMENS 2700K









Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
146234E	4W	2700K/80	470	N	E27	360°	15,000	140x64



6.8W FILAMENT ST64

- 119LM/WATT 15,000 HRS
- 810 LUMENS 2700K









Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
146236E	6.8W	2700K/80	810	N	E27	360°	15,000	140x64



FILAMENT ST64 DIMMABLE LED Lamp





7.2W FILAMENT ST64 DIMMING

- 113LM/WATT 15,000 HRS
- 810 LUMENS 2700K









Order Code	Watts	Colour (K) /CRI	Lumens (Im)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
712092	7.2W	2700K/80	810	Υ	E27	360°	15,000	140x64



FILAMENT GLOBE

NON-DIMMABLE LED Lamp





4W FILAMENT GLOBE

- 210LM/WATT 50,000 HRS
- 840 LUMENS 2700K









Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
712093	4W	2700K/80	840	N	E27	360°	50,000	137×95



FILAMENT GLOBE

DIMMABLE LED Lamp





7.2W FILAMENT GLOBE DIMMING

- 112LM/WATT 15,000 HRS
- 810 LUMENS 2700K









Order Code	Watts	Colour (K) /CRI	Lumens (Im)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
710026	7.2W	2700K/80	810	Υ	E27	360°	15,000	137x95



T8 TUBE

WITH SHATTERPROOF PET COATING LED Lamp





9-24.5W T8 TUBE SHATTERPROOF

G13 LED

- 123-147LM/ WATT
- UP TO 3100 LUMENS
- MAGNETIC BALLAST COMPATIBLE
- NO REWIRING NEEDED
- SHATTER-PROOF PET COATING AS STANDARD*
 - 30,000 HRS4000K.
 - 6500K












Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
711926	9W	4000K/80	1150	N	G13	330°	30,000	603x28 (2FT)
711927	9W	6500K/80	1150	N	G13	330°	30,000	603x28 (2FT)
711928	16W	4000K/80	2000	N	G13	330°	30,000	1212x28 (4FT)
711929	16W	6500K/80	2000	N	G13	330°	30,000	1212x28 (4FT)
711930	22W	4000K/80	2700	N	G13	330°	30,000	1513x28 (5FT)
711931	22W	6500K/80	2700	N	G13	330°	30,000	1513x28 (5FT)
711932	24.5W	4000K/80	3100	N	G13	330°	30,000	1779x28 (6FT)*
711933	24.5W	6500K/80	3100	N	G13	330°	30,000	1779x28 (6FT)*

^{*6}FT size not available as shatterproof

SINGLE ENDED INPUT







RETROFIT



T8 TUBE MICROWAVE SENSOR

WITH SHATTERPROOF PET COATING LED Lamp





6-20W T8 TUBE SHATTERPROOF MICROWAVE SENSOR

- 150-155LM/ WATT
- UP TO 3100 LUMENS
- MAGNETIC BALLAST COMPATIBLE
- NO REWIRING NEEDED
- SHATTER-PROOF PET COATING AS STANDARD*
- 50,000 HRS4000K














Order Code	Watts	Colour (K) /CRI	Lumens (Im)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
711934	6W	4000K/80	900	N	G13	330°	50,000	603x28 (2FT)
711936	12W	4000K/80	1800	N	G13	330°	50,000	1212x28 (4FT)
711939	18W	4000K/80	2700	N	G13	330°	50,000	1513x28 (5FT)
711940	20W	4000K/80	3100	N	G13	330°	50,000	1779x28 (6FT)*

*6FT size not available as shatterproof



New flexible 'fits all' range of MEGAMAN® Professional T8 LED tube lamps with shatterproof PET coating as standard*. Offers an instant and safe retrofit solution to replace outdated MAGNETIC BALLAST and HF fittings.

Intelligent Microwave Sensor option automatically dims down to 2W after 30 seconds of non-detection for a safe and intelligent solution, to even greater long-term energy and cost savings.












SINGLE ENDED INPUT









EASYFIX2D REPLACEMENT







EASYFIX 2D REPLACEMENT

EASY RETROFIT 2D REPLACEMENT SELECTABLE TRI-LUMEN OUTPUT AND 3 CCT



EASY

RETROFIT

NO REWIRING NEEDED



EASYFIX 2D REPLACEMENT 10/15/20W

RETROFIT LED LIGHT SOURCE

- 155LM/WATT
- UP TO 3100
- LUMENS
- SELECTABLE
- TRI-LUMEN OUTPUT
- NO REWIRING NEEDED
- EASY RETROFIT
- SELECTABLE 3CCT FLICKER FREE
 - 50,000 HRS
 - 3000K, 4000K. 6500K













Code	Description	Watts	K	Lumens	Beam Angle	Hrs Life
712492	EASYFIX RETROFIT SELECTABLE 3 CCT AND TRI-LUMEN OUTPUT LED LIGHT SOURCE	10W/ 15W/ 20W	3000K/ 4000K/ 6500K	1400/2100/2800 (3000K) 1550/2330/3100 (4000K/6500K)	140°	50,000

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

NEW MEGAMAN® FASYFIX COMES WITH MAGNETIC MOUNTING FFFT & 3M MATERIAL TO OFFFR THE ULTIMATE EASY RETROFIT SOLUTION TO UPGRADE EXISTING FITTINGS WITH OLD 2D FLUORESCENT LAMP TECHNOLOGY







SCAN THE QR CODE FOR MORE INFORMATION



Please refer to our website for up to date photometric information.



GX53 NON-DIMMING LED Lamp





3.2W GX53

GX53 LED

- 94LM/WATT
- 300 LUMENS
- 15,000 HRS
- 2700K, 4000K







Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
147365E	3.2W	2700K/80	300	N	GX53	N/A	15,000	24x75
147379E	3.2W	4000K/80	300	N	GX53	N/A	15,000	24x75





G4 & G9 NON-DIMMABLE & DIMMABLE LED Lamp





1.7W G4 12V

LED

- 105LM/WATT 15,000 HRS
- 180 LUMENS 2700K







Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
711180	1.7W	2700K/80	180	N	G4	330°	15,000	40x10



2.1W G9

LED

- 100LM/WATT 15,000 HRS
- 180 LUMENS 2700K







Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
142400E	2.1W	2700K/80	180	N	G9	330°	15,000	43x19



2.5W G9 DIMMING

LED

• 112LM/WATT L

28 0

LUMENS
• 25.000 HRS

13 PEDICTI MODICAL COMP



Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
142403E	2.5W	2700K/80	280	Υ	G9	330°	25,000	56x18



CLUSTERLITE®

ACTIVE COOLING LED Lamp





22W CLUSTERLITE®

F27 I FD

- 136LM/WATT 4000K
- 3000 LUMENS 4kV SURGE
- 45,000 HRS PROTECTION










Order Code	Watts	Colour (K) /CRI	Lumens (lm)	Dimmable	Lamp Base	Beam Angle	Hrs Lamp Life (max)	Dimensions (LxDia mm)
711746	22W	4000K/80	3000	N	E27	N/A	45,000	196x63

MEGAMAN® LED
CLUSTERLITE® is
specifically designed as a
high lumen output,
energy efficient, quick
and simple retrofit
replacement for Metal
Halide and SON lamps



CLUSTERLITE® LEDs



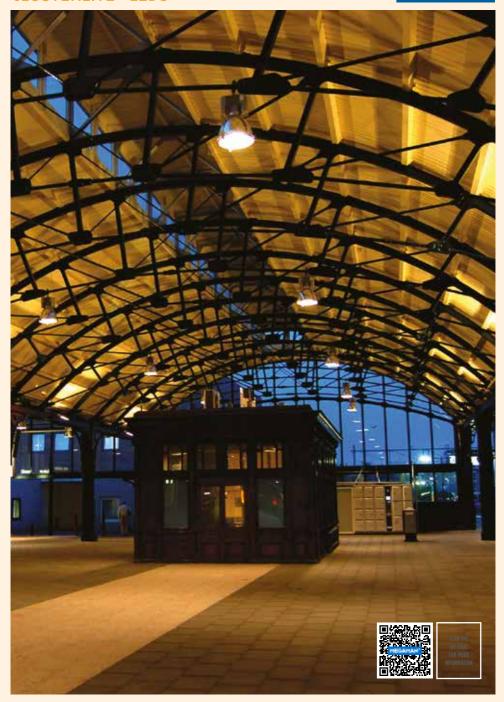

SPECIAL ORDERS

MEGAMAN® Special Order range of innovative lighting products is designed to add strength and value to any wholesale business. Minimum Order Quantities (MOQ) on all products is 3,000 pieces per SKU: with a 10/12 week lead time from placement of order.

NARROW BEAM GU10



DIMMABLE PAR16 LED

- 6° & 12° UI TRA NARROW BEAM ANGLES
- HIGH CRI90
- UP TO 93I M/W
- UP TO 560LM
- 25,000HRS
- 2700K



EXTRA WARM 2000K GU10



- 2000K AMBER LIGHT
- 36° BEAM ANGI F
- HIGH CRI90
- UP TO 91I M/W
- 4101 M
- 25,000HRS





4.5W 2000K - LR232045/DM/R9-HRV00-WF

HIGH LUMEN GU10



DIMMABLE PAR16 LED

- 36° BEAM ANGLE
- HIGH 700LM PERFORMANCE
- UP TO 140LM/W
- 25.000HRS
- 2700K





WIDE FLOOD 90° DEGREE GU10



- 90° WIDE BEAM **ANGLE**
- UP TO 133LM/W
- 600LM
- 25.000HRS
- 2700K





NEW

NEW

4.5W 90 DEGREE - LR237045/DM-HRV00-SF

ALL PRODUCTS BY ORDER ONLY





ALL PRODUCTS BY ORDER ONLY

2700K/80

2700K/80

2700K/80

2700K/80

2700K/80

3000K/80

840

485

840

1055

1521

430

Ν

Ν

Ν

Ν

Ν

4W

2.3W

4W

5W

7.2W

2 1\//

LG226040-CSV00

LG295023-OPV00

LG295040-OPV00

LG295050-OPV00

LG295072-OPV00

LR6302.1LN-WFL

FILAMENT ST64

PAR16 GLASS 36°

GLS

GLS

GLS

GLS

E14, E27, B15, B22

GUIO

50.000

50.000

50.000

50.000

50,000

50.000

SPECIAL ORDERS

MEGAMAN® Special Order range of innovative lighting products is designed to add strength and value to any wholesale business. Minimum Order Quantities (MOQ) on all products is 3,000 pieces per SKU: with a 10/12 week lead time from placement of order.

T5 TUBE CLASS D



G5 LFD 7.5-34W

- 3000K, 4000K, 6500K
- AVAILABLE IN 3 LENGTHS
- 300° BEAM ANGLE
- HIGH CRI90
- UP TO 150I M/W
- UP TO 5100LM 50.000HRS

T8 FEP TUBE



MAGNETIC G13 LED 9-22W

- 4000K, 6500K
- AVAII ABI F IN 3 **LENGTHS**
- UP TO 150I M/W
- UP TO 2700LM
- 30.000HRS



7.5W 563MM - LT201075/ac-06v00 16W 1163MM - LT201160/ac-12v00 26W 1163MM - LT201260/ac-12v00 26W 1463MM - LT201260/ac-15v00 34W 1463MM - LT201340/ac-15v00

9W 2FT - LT205090/mb/sf-06v03 16W 4FT - LT205160/mb/sf-12v03 22W 5FT - LT205220/mb/sf-15v03

T8 TUBE INSECT TRAP RETROFIT

G13 LED

- UVA I ED LIGHT
- SPECIAL WAVELENGTHS AT 36nm UV LIGHT TO ATTRACT A WIDER RANGE OF FLYING INSECTS
- · 2 WATTAGES AND LENGTHS AVAII ARI F
- 15.000HRS
- MAGNETIC AC/MAINS
- EASY RETROFIT REPLACEMENT FOR TRADITIONAL FLUORESCENT T8 TUBES

5W - LT207050/mb/uv-04v03 - 451mm 9W - LT207090/mb/uv-06v03 - 603mm



ALL PRODUCTS BY ORDER ONLY



EKON IP66 IK09 OUTDOOR STADIUM INTEGRATED LED FLOODLIGHT

MEGAMAN® EKON delivers up to 140lm/W and 175000 lumen high performance with substantial 50,000 hours lifetime. Strong and durable powder coated aluminium housing allows protection against corrosion. EKON offers symmetric and asymmetric options for uniform lighting, which delivers highly focused light beams, low glare and enhanced photometric control. With fully adjustable 180 degree joints, allows to project the light at different angles.

NO MOQ - PRICE ON REQUEST











XAVIER 2 INTEGRATED LED TRACK PANEL



FTK73900v0-ds FTK739001v0-ds FTK74000v0-da/ds

- DOUBLE
 ASYMMETRICAL
 & LAMBERTAIN
 DISTRIBUTION
- 3 PHASE TRACK MOUNTING SYSTEM
- UP TO 160LM/W
- UP TO 9600LM
- 50,000HRS
- 3000K, 4000K, 6500K

MEGAMAN® PERFORMA XAVIER is a complete and highly flexible modular optic LED Track system especially designed to deliver a perfect and uniform distribution of light that's ideal for shop and retail applications.

NO MOQ - PRICE ON REQUEST

ALL PRODUCTS BY ORDER ONLY





PRODUCT INDEX GUIDE

To find the page that the MEGAMAN® LED fixture or LED lamp is within the product guide, use the product order code listed in the following index pages.

PRODUCT GUIDE INDEX

PRODUCT CODE	CATEGORY	PAGE	PRODUCT CODE	CATEGORY	PAGE
EMG147247	EMERGENCY LIGHTING - ACCESSORIES	112/115/118/123	143314E	LED LAMPS - OPAL CANDLE	181
110110	LED PANELS - ACCESSORIES	27	143316E	LED LAMPS - OPAL CLASSIC	177
130342	LED PANELS - BERTO	23	143318E	LED LAMPS - OPAL CLASSIC	177
130344	LED PANELS - ACCESSORIES	27	143350E	LED LAMPS - OPAL CANDLE	181
140500E	LED LAMPS - GU10	169	143352E	LED LAMPS - OPAL CANDLE	181
140502E	LED LAMPS - GU10	169	143354E	LED LAMPS - OPAL CANDLE	181
140504E	LED LAMPS - GU10	170	143356E	LED LAMPS - OPAL CANDLE	181
140506E	LED LAMPS - GU10	170	143360E	LED LAMPS - OPAL CLASSIC	176
140508E	LED LAMPS - GU10	170	143362E	LED LAMPS - OPAL CLASSIC	176
140510E	LED LAMPS - GU10	168	143370E	LED LAMPS - OPAL CLASSIC	177
140512E	LED LAMPS - GU10	168	143372E	LED LAMPS - OPAL CLASSIC	177
140514E	LED LAMPS - GU10	168	143374E	LED LAMPS - OPAL CLASSIC	177
140516E	LED LAMPS - GU10	170	143376E	LED LAMPS - OPAL CLASSIC	177
140518	LED LAMPS - GU10	170	143390E	LED LAMPS - OPAL GOLF BALL	182
141510E	LED LAMPS - GU10	171	143392E	LED LAMPS - OPAL GOLF BALL	182
141580E	LED LAMPS - GU10	171	143394E	LED LAMPS - OPAL GOLF BALL	182
142220E	LED LAMPS - GU10	171	146210E	LED LAMPS - FILAMENT CLASSIC	184
142222E	LED LAMPS - GU10	171	146212E	LED LAMPS - FILAMENT CLASSIC	185
142224E	LED LAMPS - GU10	171	146214E	LED LAMPS - FILAMENT CLASSIC	186
142254E	LED LAMPS - OPAL GOLF BALL	182	146222E	LED LAMPS - FILAMENT CANDLE	188
142400E	LED LAMPS - G9	201	146224E	LED LAMPS - FILAMENT CANDLE	189
142403E	LED LAMPS - G9	201	146226E	LED LAMPS - FILAMENT CANDLE	189
142532E	LED LAMPS - OPAL CLASSIC	178	146230E	LED LAMPS - FILAMENT GOLF BALL	190
142534E	LED LAMPS - OPAL CLASSIC	178	146234E	LED LAMPS - ST64	192
142620E	LED LAMPS - AR111	173	146236E	LED LAMPS - ST64	192
142624E	LED LAMPS - AR111 GU10	173	146376E	LED LAMPS - FILAMENT CLASSIC	184
142626E	LED LAMPS - AR111 GU10	173	147365E	LED LAMPS - GX53	200
142640E	LED LAMPS - MR16	172	147379E	LED LAMPS - GX53	200
142642E	LED LAMPS - MR16	172	148390E	LED LAMPS - OPAL CLASSIC	179
143300E	LED LAMPS - OPAL CANDLE	180	148392E	LED LAMPS - OPAL CLASSIC	179
143302E	LED LAMPS - OPAL CANDLE	180	190516	TRACK LIGHT FITTINGS - MOSAIC	145
143304E	LED LAMPS - OPAL CANDLE	180	190704	LED HIGH BAYS - ACCESSORIES	91/92
143306E	LED LAMPS - OPAL CANDLE	180	190740	LED BATTENS - ACCESSORIES	65
143308E	LED LAMPS - OPAL CANDLE	181	190742	LED BATTENS - ACCESSORIES	65
143310E	LED LAMPS - OPAL CANDLE	181	190750	LED BATTENS - ACCESSORIES	65
143312E	LED LAMPS - OPAL CANDLE	181			
			-		



PRODUCT CODE	CATEGORY	PAGE	PRODUCT CODE	CATEGORY	PAGE
707171E	LED LAMPS - FILAMENT CLASSIC	185	710676	LED PANELS - BERTO	19
709166	TRACK LIGHT FITTINGS - MORA	143	710689	LED PANELS - MILENA	26
709167	TRACK LIGHT FITTINGS - MORA	143	710692	LED PANELS - MILENA	26
709224	LED LAMPS - R80	174	710709	LED PANELS - MILENA	25
709894	LED LAMPS - R63	174	710712	LED BATTENS - ACCESSORIES	57/58/61/63/65
709926E	LED LAMPS - FILAMENT GOLF BALL	190	710729	LED HIGH BAYS - ACCESSORIES	91/92
709927E	LED LAMPS - FILAMENT CANDLE	189	710842	LED HIGH BAYS - ACCESSORIES	91/92
710026	LED LAMPS - GLOBE	195	710931	LED HIGH BAYS - GEO 2	91
710337E	LED LAMPS - FILAMENT CLASSIC	186	710931EMG	LED HIGH BAYS - GEO 2 EMG	92
710390E	LED LAMPS - GU10	168	710933	LED PANELS - ACCESSORIES	27
710391E	LED LAMPS - GU10	168	710940	LED PANELS - ACCESSORIES	27
710464E	LED LAMPS - OPAL CLASSIC	178	710941	LED PANELS - ACCESSORIES	27
710465E	LED LAMPS - OPAL CLASSIC	178	710971	LED HIGH BAYS - ACCESSORIES	91/92
710466E	LED LAMPS - OPAL CLASSIC	178	710978	EMERGENCY LIGHTING - EXIT BOX	152
710467E	LED LAMPS - OPAL CLASSIC	178	711044	EMERGENCY LIGHTING - DOWNLIGHT	158
710474	EMERGENCY LIGHTING - BULKHEAD	148	711045	EMERGENCY LIGHTING - DOWNLIGHT	159
710476	EMERGENCY LIGHTING - EXIT BOX	149	711046	EMERGENCY LIGHTING - DOWNLIGHT	154
710478	EMERGENCY LIGHTING - ACCESSORIES	160	711047	EMERGENCY LIGHTING - DOWNLIGHT	155
710479	EMERGENCY LIGHTING - ACCESSORIES	160	711048	EMERGENCY LIGHTING - ACCESSORIES	27
710480	EMERGENCY LIGHTING - DOWNLIGHT	158	711049	EMERGENCY LIGHTING - EXIT BOX	152
710481	EMERGENCY LIGHTING - DOWNLIGHT	159	711050	EMERGENCY LIGHTING - EXIT BOX	150
710482	EMERGENCY LIGHTING - DOWNLIGHT	154	711051	EMERGENCY LIGHTING - EXIT BOX	149
710483	EMERGENCY LIGHTING - DOWNLIGHT	155	711052	EMERGENCY LIGHTING - BULKHEAD	148
710485	EMERGENCY LIGHTING - TWIN SPOT	153	711081	LED PANELS - BERTO	20
710487	EMERGENCY LIGHTING - EXIT BOX	151	711082	LED PANELS - BERTO	20
710488	EMERGENCY LIGHTING - EXIT BOX	150	711102	LED BATTENS - ACCESSORIES	57/58/61/63/65
710489	EMERGENCY LIGHTING - ACCESSORIES	160	711107	LED LAMPS - OPAL CANDLE	181
710491	EMERGENCY LIGHTING - ACCESSORIES	160	711108	LED LAMPS - OPAL CANDLE	181
710492	EMERGENCY LIGHTING - ACCESSORIES	160	711109	LED LAMPS - OPAL GOLF BALL	183
710502BACKLIT	LED PANELS - ACCESSORIES	27	711110	LED LAMPS - OPAL GOLF BALL	183
710502SIDELIT	LED PANELS - ACCESSORIES	27	711111	LED LAMPS - OPAL GOLF BALL	183
710505E	LED LAMPS - FILAMENT CANDLE	189	711112	LED LAMPS - OPAL GOLF BALL	183
710506E	LED LAMPS - FILAMENT CANDLE	189	711113	LED LAMPS - OPAL GOLF BALL	183
710509E	LED LAMPS - FILAMENT CANDLE	189	711114	LED LAMPS - OPAL GOLF BALL	183
710675	LED PANELS - BERTO	19	711115	LED LAMPS - OPAL CLASSIC	177
			711116	LED LAMPS - OPAL CLASSIC	177

PRODUCT GUIDE INDEX

PRODUCT CODE	CATEGORY	PAGE	PRODUCT CODE	CATEGORY	PAGE
711126S	LED FR DOWNLIGHTS - TEGO SLIM	121	711341	LED BATTENS - GARRON	42
711128S	LED FR DOWNLIGHTS - TEGO SLIM	122	711341-MS	LED BATTENS - GARRON MS	42
711133	LED LAMPS - FILAMENT CLASSIC	186	711342	LED BATTENS - ROCCA	52
711140S	LED FR DOWNLIGHTS - TEGO SLIM	121	711342-MS	LED BATTENS - ROCCA MS	52
711142S	LED FR DOWNLIGHTS - TEGO SLIM	122	711343	LED BATTENS - ROCCA	53
711163	LED LAMPS - OPAL CANDLE	180	711343-MS	LED BATTENS – ROCCA MS	53
711166	LED LAMPS - FILAMENT CLASSIC	185	711344	LED BATTENS - ROCCA	54
711180	LED LAMPS - G4	201	711344-MS	LED BATTENS - ROCCA MS	54
711181	LED LAMPS - OPAL CLASSIC	177	711345	LED BATTENS - ROCCA	49
711182	LED LAMPS - OPAL CLASSIC	177	711345-EMG	LED BATTENS – ROCCA EMG	49
711262	LED LAMPS - OPAL CLASSIC	177	711345-MS	LED BATTENS - ROCCA MS	49
711264	LED HIGH BAYS - ACCESSORIES	85/88	711346	LED BATTENS - ROCCA	50
711285	LED FLOODLIGHT - VOSS	97	711346-EMG	LED BATTENS - ROCCA EMG	50
711286	LED FLOODLIGHT - VOSS	97	711346-MS	LED BATTENS - ROCCA MS	50
711287	LED FLOODLIGHT - VOSS	98	711347	LED BATTENS - ROCCA	51
711288	LED FLOODLIGHT - VOSS	98	711347-MS	LED BATTENS - ROCCA MS	51
711289	LED FLOODLIGHT - VOSS	99	711365	EMERGENCY LIGHTING - DOWNLIGHT	156
711291	LED FLOODLIGHT - VOSS	99	711366	EMERGENCY LIGHTING - DOWNLIGHT	157
711292	LED FLOODLIGHT - VOSS PIR	101	711369	EMERGENCY LIGHTING - ACCESSORIES	27/112/115/118
711293	LED FLOODLIGHT - VOSS PIR	101	711370	LED LAMPS - FILAMENT CANDLE	189
711295	LED FLOODLIGHT - VOSS PIR	102	711371	LED LAMPS - FILAMENT CANDLE	189
711320	LED HIGH BAYS - ACCESSORIES	85/88	711385	LED LAMPS - FILAMENT GOLF BALL	191
711334	LED BATTENS - GARRON	37	711403	LED LAMPS - OPAL CANDLE	181
711334-MS	LED BATTENS - GARRON MS	37	711425	LED BATTENS - HAGON	57
711335	LED BATTENS - GARRON	39	711426	LED BATTENS - HAGON	58
711335-MS	LED BATTENS - GARRON MS	39	711427	LED BATTENS - HAGON	58
711336	LED BATTENS - GARRON	41	711455	LED LAMPS - FILAMENT GOLF BALL	191
711336-MS	LED BATTENS - GARRON MS	41	711473	LED PANELS - ACCESSORIES	27
711337	LED BATTENS - GARRON	43	711481	LED LAMPS - FILAMENT CLASSIC	186
711337-MS	LED BATTENS - GARRON MS	43	711489	LED LAMPS - PAR38	175
711338	LED BATTENS - GARRON	36	711496	LED LAMPS - PAR30	175
711338-MS	LED BATTENS - GARRON MS	36	711511	LED LAMPS - OPAL CANDLE	181
711339	LED BATTENS - GARRON	38	711512	LED LAMPS - OPAL CANDLE	181
711339-MS	LED BATTENS - GARRON MS	38	711721	LED LAMPS - R50	174
711340	LED BATTENS - GARRON	40	711726	LED LAMPS - PAR20	175
711340-MS	LED BATTENS - GARRON MS	40	711746	LED LAMPS - CLUSTERLITE	202



PRODUCT CODE	CATEGORY	PAGE	PRODUCT CODE	CATEGORY	PAGE
711920	LED LAMPS - GU10	169	712062	LED BATTENS - GARRON EMG	39
711921	LED LAMPS - GU10	168	712063	LED BATTENS - GARRON EMG	41
711922	LED LAMPS - OPAL CLASSIC	178	712064	LED BATTENS - GARRON EMG	43
711923	LED LAMPS - OPAL CLASSIC	178	712065	LED BATTENS - GARRON EMG	36
711925	LED LAMPS - OPAL CLASSIC	177	712066	LED BATTENS - GARRON EMG	38
711926	LED LAMPS - T8 TUBE	196	712067	LED BATTENS - GARRON EMG	40
711927	LED LAMPS - T8 TUBE	196	712068	LED BATTENS - GARRON EMG	42
711928	LED LAMPS - T8 TUBE	196	712069	LED BATTENS - ROCCA EMG	52
711929	LED LAMPS - T8 TUBE	196	712070	LED BATTENS - ROCCA EMG	53
711930	LED LAMPS - T8 TUBE	196	712071	LED BATTENS - ROCCA EMG	54
711931	LED LAMPS - T8 TUBE	196	712087	LED LAMPS - FILAMENT CLASSIC	185
711932	LED LAMPS - T8 TUBE	196	712088	LED LAMPS - FILAMENT GOLF BALL	191
711933	LED LAMPS - T8 TUBE	196	712089	LED LAMPS - FILAMENT GOLF BALL	191
711934	LED LAMPS - T8 TUBE MS	197	712090	LED LAMPS - FILAMENT GOLF BALL	190
711936	LED LAMPS - T8 TUBE MS	197	712091	LED LAMPS - FILAMENT GOLF BALL	190
711939	LED LAMPS - T8 TUBE MS	197	712092	LED LAMPS - ST64	193
711940	LED LAMPS - T8 TUBE MS	197	712093	LED LAMPS - GLOBE	194
712002	LED PANELS - ACCESSORIES	27	712120	LED BATTENS - ROCCA EMG	51
712038	LED FR DOWNLIGHTS - FR-PRO	112	712145	LED HIGH BAYS - KEO 2	86
712039	LED FR DOWNLIGHTS - FR-PRO TILT	115	712147	LED HIGH BAYS - KEO 2	85
712040	LED FR DOWNLIGHTS - ACCESSORIES	113	712148	LED HIGH BAYS - KEO 2	86
712041	LED FR DOWNLIGHTS - ACCESSORIES	113	712194	ACCESSORIES - MEGAQUICK	165
712042	LED FR DOWNLIGHTS - ACCESSORIES	113	712206	LED BATTENS - GARRON 2	45
712043	LED FR DOWNLIGHTS - ACCESSORIES	113	712207	LED BATTENS - GARRON 2	45
712044	LED FR DOWNLIGHTS - ACCESSORIES	113	712208	LED BATTENS - GARRON 2	46
712045	LED FR DOWNLIGHTS - ACCESSORIES	113	712209	LED BATTENS - GARRON 2	46
712046	LED FR DOWNLIGHTS - ACCESSORIES	113	712210	LED BATTENS - ACCESSORIES	45/46
712047	LED FR DOWNLIGHTS - ACCESSORIES	113	712211	LED BATTENS - ACCESSORIES	45/46
712048	LED FR DOWNLIGHTS - ACCESSORIES	113	712212	LED FR DOWNLIGHTS - TEGO 3	118
712049	LED FR DOWNLIGHTS - ACCESSORIES	113	712213	LED FR DOWNLIGHTS - ACCESSORIES	119
712050	LED FR DOWNLIGHTS - ACCESSORIES	115	712214	LED FR DOWNLIGHTS - ACCESSORIES	119
712051	LED FR DOWNLIGHTS - ACCESSORIES	115	712215	LED FR DOWNLIGHTS - ACCESSORIES	119
712052	LED FR DOWNLIGHTS - ACCESSORIES	115	712216	LED FR DOWNLIGHTS - ACCESSORIES	119
712053	LED FR DOWNLIGHTS - ACCESSORIES	115	712217	LED FR DOWNLIGHTS - ACCESSORIES	119
712054	LED FR DOWNLIGHTS - ACCESSORIES	115	712219	LED HIGH BAYS - KEO EMG	87
712061	LED BATTENS - GARRON EMG	37	712220	LED HIGH BAYS - KEO EMG	87

PRODUCT GUIDE INDEX

PRODUCT CODE	CATEGORY	PAGE
712221	LED HIGH BAYS - KEO EMG	88
712278	LED BULKHEADS - ACCESSORIES	69/71/73
712279	LED BULKHEADS - ACCESSORIES	69/71/73
712282	LED BULKHEADS - FONDA XCHANGE	73
712287	LED BATTENS - TONO 3	31
712288	LED BATTENS - TONO 3	31
712289	LED BATTENS - TONO 3	32
712290	LED BATTENS - TONO 3	32
712291	LED BATTENS - TONO 3	33
712316	LED FR DOWNLIGHTS - ACCESSORIES	113
712351	LED BULKHEADS - RENZO XCHANGE	69
712352	LED BULKHEADS - RENZO XCHANGE	70
712353	LED BULKHEADS - RENZO XCHANGE	70
712354	LED BULKHEADS - ACCESSORIES	69
712355	LED BULKHEADS - ACCESSORIES	71/73
712413	BATHROOM LED FIXTURES - JUPITER	129
712414	BATHROOM LED FIXTURES - JUPITER	129
712416	BATHROOM LED FIXTURES - JUPITER	130
712417	BATHROOM LED FIXTURES - JUPITER	130
712452	LED BULKHEADS - HERA	79
712453	LED BULKHEADS - HERA	80
712456	LED FLOODLIGHT - HUGO	106
712457	LED FLOODLIGHT - HUGO	106
712458	LED FLOODLIGHT - HUGO	107
712459	LED FLOODLIGHT - HUGO	107
712492	EASYFIX 2D REPLACEMENT	75
712501	LED BULKHEADS - LYRA	77
712502	LED BULKHEADS - ACCESSORIES	77
712503	LED BULKHEADS - ACCESSORIES	17
712504	BATHROOM LED FIXTURES - NEPTUNE	127
712505	BATHROOM LED FIXTURES - NEPTUNE	127
712509	LED BATTENS - HAGON XCHANGE	61
712511	LED BATTENS - HAGON XCHANGE	62
712512	LED BATTENS - HAGON XCHANGE	63
712514	UNDER CABINET FIXTURES - KARINA 3	135
712515	UNDER CABINET FIXTURES - KARINA 3	135

PRODUCT CODE	CATEGORY	PAGE
712516	UNDER CABINET FIXTURES - KARINA 3	136
712534	UNDER CABINET FIXTURES - LAGOM	139
712535	UNDER CABINET FIXTURES - LAGOM	139
712554	LED BULKHEADS - ACCESSORIES	77
712556	LED BULKHEADS - ACCESSORIES	77
712786	LED BATTEN - HAGON FARM XCHANGE	65

For more information on any product in the MEGAMAN® Product Guide 2025, please contact the Sales Team on **01707 386000**



Scan the QR code to find full details on all products in our comprehensive range of LED lighting solutions.

www.megamanuk.com

MEGAMAN®

Delivering innovative and cost effective LED lighting solutions for a more sustainable future

Megaman (UK) Limited Megaman House 2 Quadrant Park Mundells Welwyn Garden City Herts AL7 1FS

CALL: 01707 386000

EMAIL: sales@megamanuk.com

www.megamanuk.com





Follow us @megamanukltd

© MEGAMAN® (UK) LTD JANUARY 2026

All information stated is correct at the time of printing and subject to change without prior notice.