MEGAMAN®

WWW.MEGAMANUK.COM



# PRODUCT GUIDE 2024


Performa
ADAPTABLE, HIGH PERFORMANCE & HIGH QUALITY LED FIXTURES

TEMPUS®
EMERGENCY LIGHTING

essentials
VALUE FOR MONEY, RELIABLE EVERYDAY LED FIXTURES

LEDLamps
RANGE OF PROFESSIONAL & ECONOMY LED LAMPS

# 30 YEARS OF DELIVERING LIGHTING EXCELLENCE

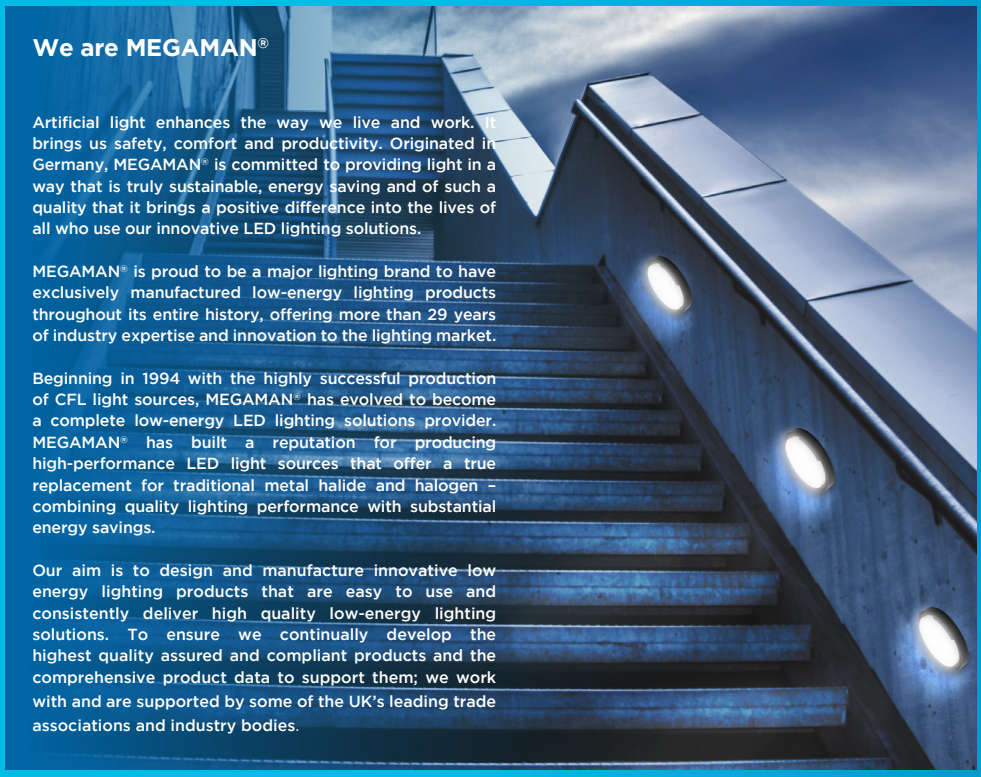

## We are MEGAMAN®

Artificial light enhances the way we live and work. It brings us safety, comfort and productivity. Originated in Germany, MEGAMAN® is committed to providing light in a way that is truly sustainable, energy saving and of such a quality that it brings a positive difference into the lives of all who use our innovative LED lighting solutions.

MEGAMAN® is proud to be a major lighting brand to have exclusively manufactured low-energy lighting products throughout its entire history, offering more than 29 years of industry expertise and innovation to the lighting market.

Beginning in 1994 with the highly successful production of CFL light sources, MEGAMAN® has evolved to become a complete low-energy LED lighting solutions provider. MEGAMAN® has built a reputation for producing high-performance LED light sources that offer a true replacement for traditional metal halide and halogen – combining quality lighting performance with substantial energy savings.

Our aim is to design and manufacture innovative low energy lighting products that are easy to use and consistently deliver high quality low-energy lighting solutions. To ensure we continually develop the highest quality assured and compliant products and the comprehensive product data to support them; we work with and are supported by some of the UK's leading trade associations and industry bodies.

Member of theLIA

epim putting data first

EDA ELECTRICAL DISTRIBUTORS' ASSOCIATION

DATA

# Providing flexible lighting solutions for a wide range of indoor and outdoor applications, introducing MEGAMAN®'s new and improved fixture and lamp portfolio for 2024.

**Performa**
ADAPTABLE, HIGH PERFORMANCE & HIGH QUALITY LED FIXTURES

For adaptable, high-performance fixture solutions, look no further than our Performa range. Combining quality materials and value-added features like motion sensors, emergency compatibility, dual beam technology (DBT) and colour change technology (CCT), performance is at the heart of all Performa solutions.

**essentials**
VALUE FOR MONEY, RELIABLE EVERYDAY LED FIXTURES

For cost-effective, staple products, the Essentials range should be every contractor and wholesaler's go-to. Providing reliability and innovation, Essentials solutions are there for the day-to-day, delivering in terms of cost and results for both retrofit and new-build installations.

Collectively these two ranges provide you with more choice and echo Megaman's long-standing LED lamp collections – Professional and Economy – with a product for every eventuality.

**TEMPUS®**
EMERGENCY LIGHTING

Designed with ease of installation in mind, these new fixture ranges emphasise our ongoing commitment to supporting and making life easier for our contractors and stockists. Simple, one-box solutions, they're ideal to keep in the back of the van; and for our wholesalers' and ease of stock control was also at the forefront during product development.

**LEDLamps**
RANGE OF PROFESSIONAL & ECONOMY LED LAMPS

Alongside our staple lamps and expanding TEMPUS® emergency lighting range, Megaman can now meet the full spectrum of lighting needs for homes, offices, commercial applications and even farms, with energy efficient LED solutions at its core.

# MEGAMAN® UK-WIDE SALES TEAM


**The Megaman Business Development team have been specifically trained to enhance our relationship with our customers and to ensure that we offer the individual support that they require.**

Technical product advice and suggestions to ensure that the correct lighting solutions are selected for each clients requirements.

Recommendations on how to reduce energy consumption and save on energy bills.

Help in lowering carbon emissions to meet Government targets and fulfil ISO accreditations.

Advice on changes in regulations. Guidance on new lamp and lighting technologies.

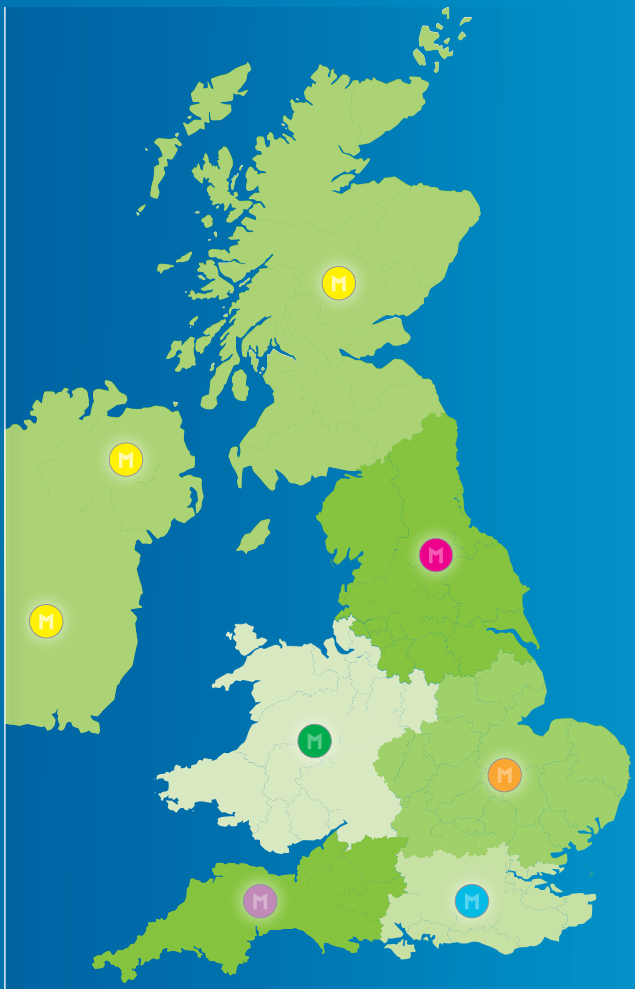

**SCOTLAND, N. IRELAND, ISLE OF MAN & REPUBLIC OF IRELAND**
CONTACT: 07931 817211

**NORTH ENGLAND**
CONTACT: 07958 172109

**WALES & WEST MIDLANDS**
CONTACT: 07931 817212

**EAST MIDLANDS & ANGLIA**
CONTACT: 07813 695891

**LONDON & SOUTH EAST**
CONTACT: 07976 620377

**SOUTH WEST**
CONTACT: 07811 144540

KEY



IP RATING



IMPACT RATING



WARRANTY PERIOD



FLICKER FREE


SHATTER PROOF



GLARE RATING



MICROWAVE MOTION FUNCTION



ELECTRICAL CLASS RATING



PRODUCT DISCOUNT GROUP



LIGHT DISTRIBUTION



SWITCHABLE BEAM ANGLE



COLOUR CHANGING FUNCTION



DIMMING FUNCTION



UNIVERSAL DIMMING



HIGH CRI RATING



ACOUSTIC RATING



PIR SENSOR FUNCTION



MICROWAVE MOTION SENSOR



VARIABLE POWER OUTPUT



EMERGENCY FUNCTION


FIRE-RATED DOWNLIGHT



PUSH-FIT CONNECTION



SHATTERPROOF T8 TUBE



EARTH CONTINUITY



2 YEAR ON-SITE WARRANTY

# CONTENT


**Performa** | ADAPTABLE, HIGH PERFORMANCE & HIGH QUALITY LED FIXTURES

PERFORMA LED FIXTURES 08-19

TEMPUS® SELF-TEST EMERGENCY LIGHTING 20-27

**essentials** | VALUE FOR MONEY, RELIABLE EVERYDAY LED FIXTURES

ESSENTIALS LED FIXTURES RANGE 28-41

TEMPUS® EMERGENCY LIGHTING 42-49

**LEDLamps** | RANGE OF PROFESSIONAL & ECONOMY LED LAMPS

PROFESSIONAL & ECONOMY LED LAMPS 50-81

PRODUCT GUIDE INDEX 83-85

ON-SITE WARRANTY 06-07

# SUSTAINABILITY

Sustainability is at the core of everything that we are and do. Like all responsible manufacturers we are dedicated to making a sustainable future possible.

With our specialist partners we've worked hard to develop a culture of environmental awareness and mindset of sustainable operation to continually reduce our carbon and waste footprint in order to achieve Net Zero.

- Zero Waste Policy implemented throughout our UK operations
- 99% of cardboard & shrink wrap waste is used as shredded packing filler
- Our waste management partner recycles all remaining cardboards & plastics
- Megaman products delivered on recyclable cardboard paletts
- Entire UK headquarters energy consumption cut by a third

## WORKING TOWARDS ACHIEVING NET ZERO

**Starting from 1 September 2021, the Ecodesign Regulations and Energy Labelling Regulations were updated and the ultimate goal is to maintain a sustainable development in the lighting industry by a significant energy saving for lighting products and systems.**

### The Ecodesign Regulations (EU) 2019/ 2020

- Optimizing the design of light sources and separated control gear for more sustainability and efficiency
- Product which fail to meet the requirements will be phased out, for example halogen G9, G4 and GY6.35 capped lamps and fluorescent T8 lamps will be phased out starting 1 September 2023
- Lighting installation will have to be renovated with new energy-efficient light sources

### The Energy Labelling Regulation – empowerment through information

- Introduce a new energy label to empower end users to choose energy efficient products
- New scale reflects how efficient a product is – the definition of A to G will change based on new efficiency requirements.



# At the core of everything we are and do

## Rigorous Quality and Management Systems

All MEGAMAN® products are designed, tested and produced in our own factories in Xiamen, China. Standards have been implemented factory-wide to ensure the MEGAMAN® manufacturing processes deliver innovative, reliable and safe products with high-quality standards now and in the future.

To ensure that MEGAMAN® products comply with the highest quality standards, company manufacturing plants are equipped with their own assembly lines.

The MEGAMAN® business runs under the most stringent management and quality systems. The green elements of the production process are maximised, employee welfare is prioritised and the company is socially responsible to the local community. To continually develop these areas, MEGAMAN® has undertaken a range of international accreditations. These include:

### Quality Management System

MEGAMAN® lamps and luminaires are manufactured and certified to ISO 9001:2015.

### Product Quality Assurance

MEGAMAN® lamps and luminaires are made using premium quality materials and innovative technologies within stringent control measures, to deliver maximum performance and energy efficiencies.

CE | TÜVRheinland | DEKRA | CNAS | ISO 9001 | ISO 14001

## Innovative and Unique Products

With our patented LED design and technology, the MEGAMAN® LED luminaires and lamps are able to deliver superb performance, including low power consumption, excellent light output and low maintenance costs. They provide the highest quality lighting performance of any LED based product on the market consuming the same power!

### Entering a New Era in LED Lighting and Luminaire Solutions

Unique Features

- Energy efficient replacement for traditional metal halide, CFL, halogen and incandescent luminaires
- Deliver superb lighting performance
- High luminous efficacy up to 210lm/W
- High lumen maintenance: rated lumen maintenance of 70% (L70) at up to 50,000 hours life
- High colour rendering up to Ra97
- High colour temperature consistency
- Long rated life up to 50,000 hours
- Simple installation and servicing
- High energy savings
- No UV and IR radiation

Additional Benefits

- Mercury-free
- Instant start-up
- Wide range of operating temperatures

Applications

- Hospitality
- Retail lighting
- Offices
- Residential
- Decorative
- Industrial
- Outdoor

# ON-SITE WARRANTY

## MEGAMAN® 2 Year On-Site Warranty

In the event that a product covered by the 2 year On-Site Warranty fails within 2 years of the purchase date MEGAMAN® will, where possible, authorise the installer to replace the failed product and reimburse fair and reasonable costs. In the event that agreement can not be reached MEGAMAN® engineers will carry out the repair or replacement.

PERFORMA
### GEO 2 HIGH BAY
IP65 Dimming LED High Bay with Selectable Wattage and Remote Controllable Sensor



Go to Page 11 for full details on GEO 2 High Bay

5YR WARRANTY & 2YR ON-SITE WARRANTY

ESSENTIALS
### KEO HIGH BAY
IP65 Dimming LED High Bay with Selectable Wattage and Remote Controllable Sensor



Go to Page 31 for full details on KEO High Bay

3YR WARRANTY & 2YR ON-SITE WARRANTY


**The warranty shall be void in the following circumstances:-**

- Non-compliance with installation and safety regulations given in the installation instructions
- Modification or repair of any product by the installer, end user or anyone unauthorised to do so
- Improper use or installation, damage by accident or neglect, of any product by the installer, end user or any third party
- If the product is operated outside of the stated operating temperature of the lamp or luminaire.

# 2 Year On-Site Warranty

## PERFORMA
## HAGON BATTEN

IP66 Weatherproof Integrated LED Batten with Dual Lumen Output

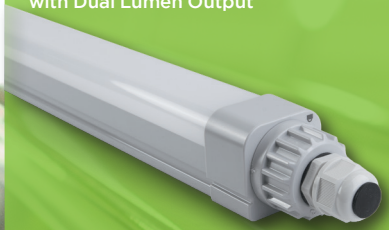

Go to Page 14 for full details on HAGON IP66 Weatherproof Batten

5YR WARRANTY

& 2YR ON-SITE WARRANTY

& 2YR ON-SITE WARRANTY

## ESSENTIALS
## BERTO BACKLIT TPa UGR<19 LED PANEL

UGR<19 Square and Rectangular Backlit TPa LED Panels with Non-Dimming Driver



Go to Page 30 for full details on BERTO BACKLIT TPa LED Panels

5YR WARRANTY ON LED PANEL & DRIVER

& 2YR ON-SITE WARRANTY

## ESSENTIALS
## ROCCA & ROCCA EMERGENCY BATTEN

IP65 Weatherproof Integrated LED Batten Single and Twin Output




Go to Pages 38 & 39 for full details on ROCCA & ROCCA Emergency Battens

3YR WARRANTY

& 2YR ON-SITE WARRANTY

# Performa

# ADAPTABLE AND HIGH PERFORMANCE RANGE OF LED FIXTURES

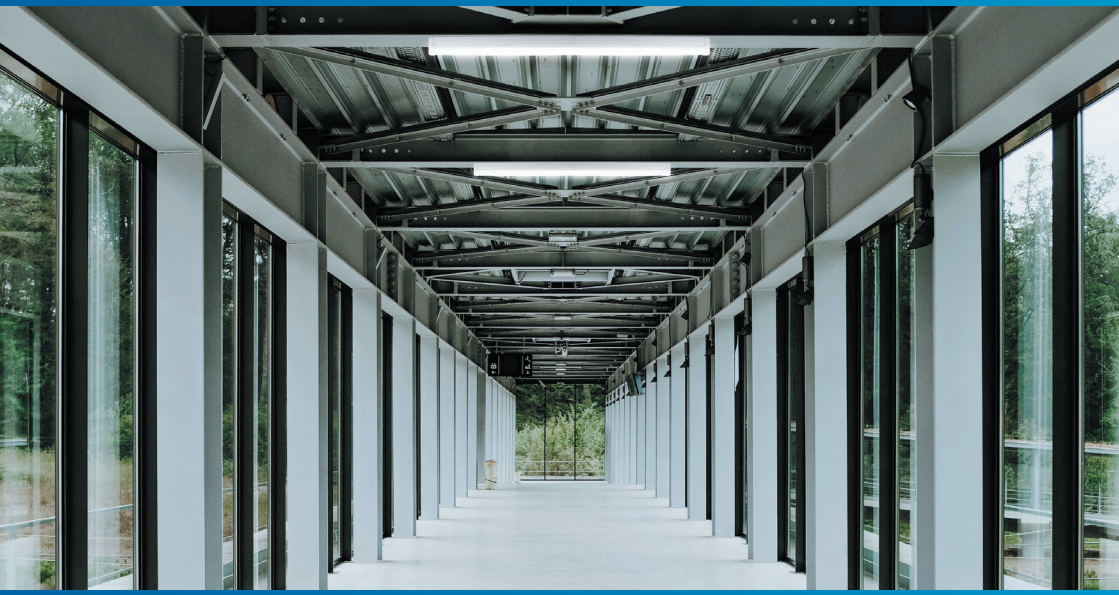

# High Quality & Performance LED Fixtures

For adaptable, high-performance fixture solutions, look no further than our Performa range. Combining quality materials and value-added features like motion sensors, emergency compatibility, dual beam (DBT) and colour change technology (CCT), intelligent and reliable performance is at the heart of all MEGAMAN® Performa solutions.



BERTO SIDELIT TPa LED PANEL 10


GEO 2 LED HIGH BAY 11


RENZO MODULAR LED BULKHEAD 12


TONO SLIM INDOOR LED BATTEN 13


HAGON IP66 WEATHERPROOF BATTEN 14


DINO 2 FARM IP66 ANTI-CORROSIVE BATTEN 15


TEGO 2 FIRE-RATED LED DOWNLIGHT - DBT & CCT 16


5W TEGO FIRE-RATED LED DIMMING DOWNLIGHT 17


FR-PRO IP65/IP20 FIRE-RATED LED CAN 18


5YR WARRANTY

MEGAMAN®

# BERTO SIDELIT

## UGR<22 Square Sidelit TPb LED Panel 600mmx600mm


Performa PANEL

IP40 | CLASS I | 11 PRODUCT DISCOUNT GROUP | UGR 22 | Flicker Free ≤3% | 3h | PUSH-FIT CONNECTOR | PER BOX 1/8

5YR WARRANTY ON LED PANEL & DRIVER



- IP40
- IK04
- Comes with Non-Dimming Driver
- Surface and suspension mounting kits available separately
- Up to 100 lumen per system watt efficacy
- Perfect for shallow ceiling voids
- Quick & easy installation
- Lightweight LED panel with non discolouring TPb rated diffusers
- Suitable for use in exposed T-grid ceilings
- Ideal for general lighting use
- Long maintenance period and low lumen depreciation
- Can be used as part of a Part L building compliance




SCAN THE QR CODE FOR MORE INFORMATION

**Photometric data:** Please refer to our website for up to date photometric information.

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Dimmable | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|---|
| **130340** | UGR22 TPb SIDELIT (SQUARE) X1 PANEL | 36W | 4000K / 80 | 3600 | N | 110° | 50,000 | 595x595x13 |
| **130342** | UGR22 TPb SIDELIT (SQUARE) X1 PANEL | 36W | 6500K / 80 | 3600 | N | 110° | 50,000 | 595x595x13 |

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

ACCESSORIES



**710502SIDELIT** Emergency Kit for Sidelit panels with Connectors



**110110** 50W Dimmable LED Driver




**711473** Y Type Suspension Kit for Panel



**710941** 37W DALi 2 Dimming Driver



**130344** Loop Through Junction Box with 3 Pin



**710933** Surface Mounted Frame 600x600x64 mm

MEGAMAN®

# GEO 2

## IP65 Dimming LED High Bay with Selectable Wattage and Remote Controllable Sensor


Performa
HIGH BAY


IP65 | IK 08 | Microwave Motion Sensor | Flicker Free ≤3% | Dimmable | CLASS I | 11 PRODUCT DISCOUNT GROUP | Selectable Lumen Output | PUSH-FIT CONNECTOR | PER BOX 1/1

5YR WARRANTY & 2YR ON-SITE WARRANTY



- IP65
- IK08
- Passive cooling structure
- Excellent heat dissipation with graphene housing
- Easy installation with single point hook mounting design
- Eye hook included
- Anti-surge protected fitting
- In-line flex connector with push fit. Allows PCR2000 flex to be connected without using additional adaptable box. Reducing installation time dramatically
- Compatible with microwave sensor
- Flicker free to avoid stroboscopic effect with rotating machines.
- High vandal resistant with IK08
- Reflector & refractor as optional accessories
- Counter balance included with Microwave Motion Sensor to ensure balanced install
- Remote Control sold separately
- Dimming via Microwave Sensor only




**MEGAMAN® GEO 2** microwave sensor detects movement within around 4m radius horizontally when mounted at 16m height and an optimal 16m radius when mounted at 8m height.

SCAN THE QR CODE FOR MORE INFORMATION

**Photometric data:** Please refer to our website for up to date photometric information.

| Order Code | Description | Watts | Colour Temp (K)/ CRI | Lumens (lm) | Dimmable | Beam Angle | Hrs Lamp Life (max) | Dimensions (HxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **710931** | GEO 2 DIMMING HIGH BAY | 70/90/100 125/150W | 4000K / 80 | 10500/13500/15000 18900/21000 | Y | 110° | 50,000 | 201x300 |
| **710931EMG** | GEO 2 DIMMING EMERGENCY HIGH BAY | 70/90/100 125/150W | 4000K / 80 | 10500/13500/15000 18900/21000 | Y | 110° | 50,000 | 201x300 |

ACCESSORIES



**710729** GEO 2 Microwave Motion Sensor



**710971** GEO 2 0-10V Dimming wire 300mm



**190706** 70° Polycarbonate Reflector



**190704** 90° Aluminium Reflector



**710842** GEO 2 Motion Sensor Remote Control



IN-LINE FLEX CONNECTOR WITH PUSH FIT AS STANDARD

MEGAMAN®

# RENZO


## Integrated Plug-and-Play Modular LED Bulkhead in 3 different sizes

Performa
BULKHEAD

IP44 | Flicker Free ≤3% | Switching CCT | 3h | Microwave Motion Sensor | CLASS I | 11 PRODUCT ENCODING GROUP | PUSH-FIT CONNECTOR | PER BOX 1/10

5YR WARRANTY



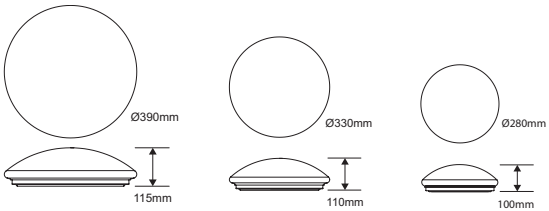


- IP44
- IK03
- Comes with Non-Dimming Driver
- Plug-and-play modular design enhances the installation flexibility
- Able to mix colour temperature through driver
- High power factor >0.9
- MEGAMAN® RENZO with microwave motion sensor can serve as a master device to control others
- Homogeneous light output with durable PMMA cover avoiding yellowing deterioration
- Will not yellow with use
- Part L compliant
- Selectable lumen output (930/1400lm) for RENZO M and (930-2000lm) for RENZO L size
- RENZO S can fit either emergency kit or microwave sensor - M and L can accommodate both
- BESA box mountable

SCAN THE QR CODE FOR MORE INFORMATION

**Photometric data:** Please refer to our website for up to date photometric information.

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Dimmable | Beam Angle | Hrs Lamp Life (max) | Dimensions (DiaxD mm) |
|---|---|---|---|---|---|---|---|---|
| **710264** | 11W RENZO (S) DUAL CCT | 11W | 3000K /80 4000K/80 | 930-1000 | N | 110° | 50,000 | 280x100 |
| **710430** | 10W/15W RENZO (M) DUAL CCT | 10W/15W | 3000K /80 4000K/80 | 930-1400 | N | 110° | 50,000 | 330x110 |
| **710274** | 10W/15W/22W RENZO (L) DUAL CCT | 10W/15W/22W | 3000K /80 4000K/80 | 930-2000 | N | 110° | 50,000 | 390x115 |

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

ACCESSORIES



**710286**
Microwave Motion Sensor

Microwave Motion Sensor
- 3 Levels: 50 lux, 10 lux and 2 lux
- 4 Hold times: 5 secs, 40 secs, 5 mins and 15 mins
- Change sensitivity of sensor installation flexibility



**710267**
Emergency Kit

3 Year Warranty on both Microwave Motion Sensor and Emergency Kit.

**Replacement Covers**

**711169** - S cover
**711170** - M cover
**711171** - L cover

MEGAMAN®

# TONO


## Integrated LED Indoor Batten
## BESA box compatible

Performa
BATTEN

IP20 | Flicker Free ≤3% | CLASS II | 11 PRODUCT DISCOUNT GROUP | PUSH FIT CONNECTOR | PER BOX 1/20 2FT TONO | PER BOX 1/10 3FT-6FT TONO

5YR WARRANTY



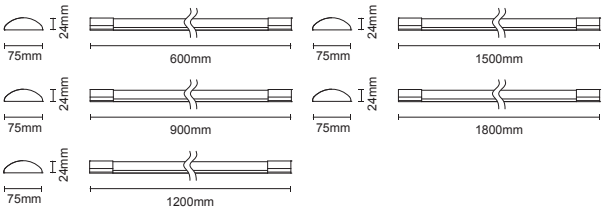


- IP20
- Indoor Integrated LED Batten
- Integrated driver
- Up to 117 lumen per system watt efficacy
- Concealed clip system
- Flicker free (flicker Ratio <3% @100Hz)
- BESA box compatible
- Pre-wired from one end with a 500mm flylead
- Ideal alternative to T5 and T8 fluorescent fitting
- Simple installation and easy maintenance
- Mounting is quick and tidy
- Wide light distribution
- Reduced maintenance costs
- Highly competitively priced LED batten

SCAN THE QR CODE FOR MORE INFORMATION

**Photometric data:** Please refer to our website for up to date photometric information.

| Order Code | Description | Watts | Colour Temp (K) /CRI | Lumens (lm) | Dimmable | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxW xH mm) |
|---|---|---|---|---|---|---|---|---|
| **180380E** | 2ft Indoor Batten | 20W | 3000K / 80 | 2200 | N | 110° | 50,000 | 600x75x24mm |
| **180342E** | 2ft Indoor Batten | 20W | 4000K / 80 | 2200 | N | 110° | 50,000 | 600x75x24mm |
| **180390E** | 2ft Indoor Batten | 20W | 6500K / 80 | 2200 | N | 110° | 50,000 | 600x75x24mm |
| **180382E** | 3ft Indoor Batten | 29W | 3000K / 80 | 3300 | N | 110° | 50,000 | 900x75x24mm |
| **180344E** | 3ft Indoor Batten | 29W | 4000K / 80 | 3300 | N | 110° | 50,000 | 900x75x24mm |
| **180392E** | 3ft Indoor Batten | 29W | 6500K / 80 | 3300 | N | 110° | 50,000 | 900x75x24mm |
| **180384E** | 4ft Indoor Batten | 38W | 3000K / 80 | 4350 | N | 110° | 50,000 | 1200x75x24mm |
| **180346E** | 4ft Indoor Batten | 38W | 4000K / 80 | 4350 | N | 110° | 50,000 | 1200x75x24mm |
| **180394E** | 4ft Indoor Batten | 38W | 6500K / 80 | 4350 | N | 110° | 50,000 | 1200x75x24mm |
| **180386E** | 5ft Indoor Batten | 48W | 3000K / 80 | 5600 | N | 110° | 50,000 | 1500x75x24mm |
| **180348E** | 5ft Indoor Batten | 48W | 4000K / 80 | 5600 | N | 110° | 50,000 | 1500x75x24mm |
| **180396E** | 5ft Indoor Batten | 48W | 6500K / 80 | 5600 | N | 110° | 50,000 | 1500x75x24mm |
| **180388E** | 6ft Indoor Batten | 56W | 3000K / 80 | 6550 | N | 110° | 50,000 | 1800x75x24mm |
| **180350E** | 6ft Indoor Batten | 56W | 4000K / 80 | 6550 | N | 110° | 50,000 | 1800x75x24mm |
| **180398E** | 6ft Indoor Batten | 56W | 6500K / 80 | 6550 | N | 110° | 50,000 | 1800x75x24mm |

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

MEGAMAN®


# HAGON


## IP66 Weatherproof Integrated LED Batten with Dual Lumen Output

Performa BATTEN

IP66 | IK 08 | Flicker Free ≤3% | Switching CCT | 3h | Microwave Motion Sensor | CLASS II | 11 PRODUCT DESIGNER GROUP | PUSH-FIT CONNECTOR | PER BOX 1/18

5YR WARRANTY & 2YR ON-SITE WARRANTY

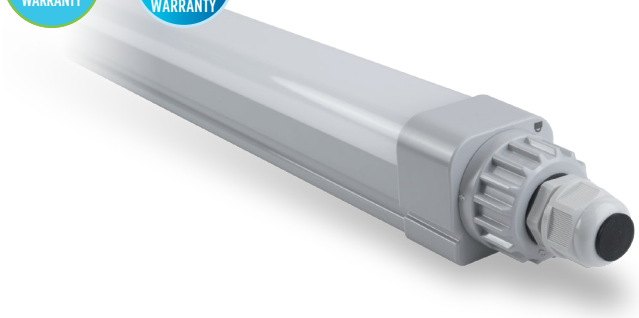

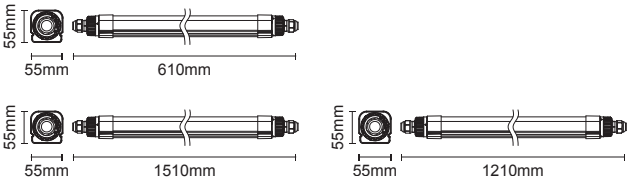


- IP66 Weatherproof protection
- IK08 polycarbonate vandal resistant body
- Outdoor Integrated LED Batten
- Dual Lumen Output
- Concealed clip system
- Flicker free (flicker Ratio <3% @100Hz)
- Easy and flexible installation through sliding stainless steel clips. Enabling use of existing mounting holes to replace conventional light fittings
- Cable entries and through wiring allow for linear series connection
- Additional Live [L1, (L2), E, N] allows for connection of emergency kit and sensor; and also enables the forming of more than 1 group master/slave in PR sensor module (710712), which operate independently of each other
- Ideal for harsh environments and applications

SCAN THE QR CODE FOR MORE INFORMATION

**Photometric data:** Please refer to our website for up to date photometric information.

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Dimmable | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|---|
| **711425** | WEATHERPROOF BATTEN | 17W | 4000K/80 | 2380 | N | 120° | 50,000 | 55x55x610 |
| **711426** | WEATHERPROOF BATTEN | 17W/33W | 4000K/80 | 2380/4600 | N | 120° | 50,000 | 55x55x1210 |
| **711427** | WEATHERPROOF BATTEN | 33W/50W | 4000K /80 | 4600/7000 | N | 120° | 50,000 | 55x55x1510 |

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

ACCESSORIES




**710712**
HAGON & DINO 2 PIR Sensor




**711102**
HAGON & DINO 2 Emergency Kit

5 Year Warranty on both PIR Sensor and Emergency Kit.


MEGAMAN®

# DINO 2 FARM


## IP66 Anti-Corrosive Integrated LED Batten with PIR Sensor and Emergency options


Performa BATTEN

IP66 | IK 04 | Flicker Free ≤3% | 3h | Microwave Motion Sensor | CLASS II | 11 PRODUCT DISCOVERY GROUP | PUSH-FIT CONNECTOR | PER BOX 1/18

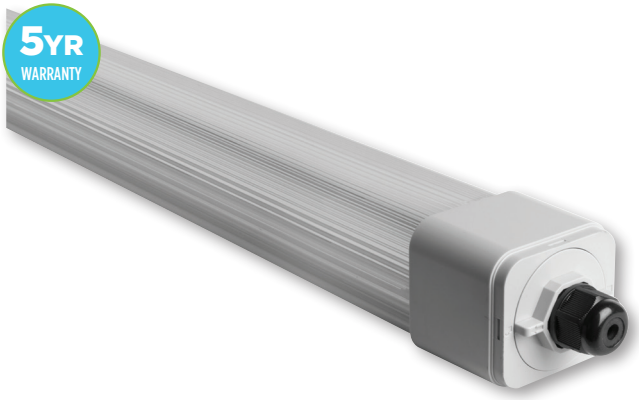


- IP66
- IK04
- Permanent live option
- Chemical resistant housing
- PIR Sensor Module available
- Energy saving efficacies of up to 123lm/W
- Offering 4-pole option
- Ideal low energy alternative to T5 and T8 linear fluorescent luminaires
- Ammonia resistant, making it perfect for the demanding and often harsh farm environments
- Simple fast-fix stainless steel mounting clips for easy installation
- Permanent live to facilitate the use of a non-maintained emergency luminaire and sensor modules
- Option to conceal cable entry
- Control lighting when not in use
- Wide and even light distribution
- Reduced maintenance costs




SCAN THE QR CODE FOR MORE INFORMATION

**Photometric data:** Please refer to our website for up to date photometric information.




DLG certified with ammonia resistant and is applicable for high pressure cleaning with a minimum distance of 15cm.

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Dimmable | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|---|
| **190796** | ANTI-CORROSIVE BATTEN | 35W | 4000K / 80 | 4300 | N | 120° | 50,000 | 1323x60x54 |
| **190798** | ANTI-CORROSIVE BATTEN | 53W | 4000K / 80 | 6500 | N | 120° | 50,000 | 1623x60x54 |

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

ACCESSORIES




**710712**
HAGON & DINO 2 PIR Sensor



**711102**
HAGON & DINO 2 Emergency Kit



**190750**
DINO 2 End Covers



**190740** DINO 2 Suspension Clips (X2)



**190742** DINO 2 Brackets for theft protection

MEGAMAN®

# TEGO 2

## IP65 Fully Fire-Rated Integrated LED Downlight with DBT & Selectable Dual CCT

Performa DOWNLIGHT


IP65 | IK 03 | Switching CCT | Dimmable | DBT | CLASS I | 19 PRODUCT DISCOUNT GROUP | PUSH-FIT CONNECTION | EARTH CONTINUITY

5YR WARRANTY

PER BOX 1/28



- Fully fire-rated 30/60/90 minute
- TEGO 2 Selectable Dual CCT (2800K or 4000K) is easily activated by a simple twist of the lens once the fixture is installed.
- Press lens front cover to change beam angle to 36˚ or 60˚ with Dual Beam Technology (DBT)
- Toolless wiring block and push-in terminal ensure easy install
- Flexible Loop in/Loop out feature
- Range of magnetised bezel cover accessories available in 3 design finishes
- Flicker free ≤ 3%
- Triac Dimming
- No tools. No mess. TEGO 2 removes the need for contractor to 'make good' ceilings
- Aluminium thermal insulation guard included in box




SCAN THE QR CODE FOR MORE INFORMATION

**Photometric data:** Please refer to our website for up to date photometric information.

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Dimmable | Beam Angle | Hrs Lamp Life (max) | Hole Cut-Out (mm) | Dimensions (DiaxD mm) |
|---|---|---|---|---|---|---|---|---|---|
| **711183** | FIRE-RATED DOWNLIGHT | 7.5W | 2800K/80 OR 4000K/80 | 600/650 | Y | 36° & 60° | 50,000 | 68 | 72x90 |

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C


ACCESSORIES



**711085**
TEGO 2 Chromium finish bezel



**711087**
TEGO 2 Brushed Nickel finish bezel



**711088**
TEGO 2 Black finish bezel

MEGAMAN®

# 5W TEGO

## IP65 Fully Fire-Rated Integrated Dimming LED Downlight with Selectable Dual CC


Performa DOWNLIGHT

IP65 | Switching CCT | Dimmable | CLASS II | 11 PRODUCT DESIGNER GROUP | PUSH-FIT CONNECTOR | PER BOX 1/24

**4YR WARRANTY**



- IP65 with fixed bezel
- IP20 when using adjustable/tilt bezel
- TEGO enables easy switch to 3000K or 4000K colour temperature with unique Colour Changing Technology (CCT)
- Toolless wiring block and push-in terminal ensure easy install
- Flexible Loop in/Loop out feature enables for quick connection
- Triac Dimmable as standard
- Range of bezel accessories available in 3 design finishes (White, Chrome & Brushed Nickel)
- Fully fire-rated for 30/60/90 minute ceilings
- 5W version has ability to be tilt adjustable with tilt bezel accessories
- Versatile range of interchangeable bezels allows for multitude of finishes with minimal stock lines and space




SCAN THE QR CODE FOR MORE INFORMATION

**Photometric data:** Please refer to our website for up to date photometric information.

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Dimmable | Beam Angle | Hrs Lamp Life (max) | Hole Cut-Out (mm) | Dimensions (DiaxD mm) |
|---|---|---|---|---|---|---|---|---|---|
| **519030** | FIRE-RATED DOWNLIGHT | 5W | 3000K/80 OR 4000K/80 | 420 | Y | 36° | 50,000 | 73 | 70x85 |

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

ACCESSORIES



519034 TEGO Adjustable White bezel



519036 TEGO Fixed Chrome bezel



519038 TEGO Fixed Brushed Nickel bezel



519040 TEGO Adjustable Chrome bezel



519042 TEGO Adjustable Brushed Nickel bezel



EMG147247 5W-7W GU10 Emergency Pack EMC Compliant

MEGAMAN®

# FR-PRO

## IP65/IP20 Fully Fire-Rated Downlight Can with GU10 Base

Performa DOWNLIGHT

IP65 IP20 EARTH CONTINUITY 24 PRODUCT DISCOUNT GROUP PER BOX 1/24

5YR WARRANTY





- Simple Loop in/ loop out lever connector for easy toolless wiring
- Translucent lid to visibly check wiring if required
- Compact size for small ceiling voids – only 65 mm deep
- 30/60/90 minute fire-rated
- Can house ANY Megaman GU10 lamp – allowing versatility for end user
- IP65 and IP20 bezels available in various colour options – both IP ratings fit same can

SCAN THE QR CODE FOR MORE INFORMATION

**Photometric data:** Please refer to our website for up to date photometric information.

An advanced compact and tool free fire-rated can, designed specifically to save time and add flexibility for installers and end users alike.

NEW

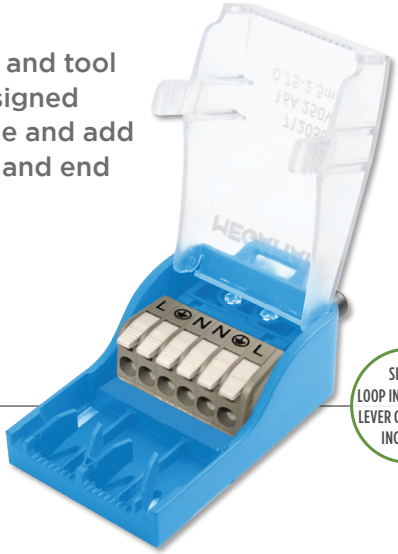


SIMPLE LOOP IN/LOOP OUT LEVER CONNECTOR INCLUDED

| Order Code | Description | Power Rating | Hrs Lamp Life (max) | Hole Cut-out (mm) | Dimensions (DiaxH mm) |
|---|---|---|---|---|---|
| **712038** | IP65/IP20 FIRE-RATED CAN WITH GU10 BASE | Variable depending on GU10 chosen | 50,000 | 68 | 70x65 |

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

See MEGAMAN®'s full range of Professional and Economy Series GU10 LED lamps on pages 50-53.

MEGAMAN®

# FR-PRO BEZELS

## IP65 and IP20 Rated Detachable Bezel Options

Performa DOWNLIGHT

IP65 IP20 24 PRODUCT DISCOUNT GROUP




- Slim twist-lock detachable bezel for quick and easy style change to suit ceiling finish
- A range of 5 different bezel finishes - White,Chrome, Brushed Nickel, Antique Brass and Black
- Ideal for hotels, restaurants, rental accommodation and new builds

SCAN THE QR CODE FOR MORE INFORMATION

**Photometric data:** Please refer to our website for up to date photometric information.

NEW MEGAMAN® FR-PRO fully fire-rated can provides all the style and benefits of a modern integrated LED downlight; but with the extra flexibility of a replaceable GU10 lamp to enable easy install or changeover when required.

ACCESSORIES

NEW

| | | | | |
|---|---|---|---|---|
|  |  |  |  |  |
| 712045 FR-PRO IP65 White bezel | 712046 FR-PRO IP65 Chrome bezel | 712047 FR-PRO IP65 Brushed Nickel bezel | 712048 FR-PRO IP65 Black bezel | 712049 FR-PRO IP65 Antique Brass bezel |
| 712040 FR-PRO IP20 Fixed White bezel | 712041 FR-PRO IP20 Fixed Chrome bezel | 712042 FR-PRO IP20 Fixed Brushed Nickel bezel | 712043 FR-PRO IP20 Fixed Black bezel | 712044 FR-PRO IP20 Fixed Antique Brass bezel |

# Performa

# TEMPUS® EMERGENCY LIGHTING SOLUTIONS



# TEMPUS® Self-Test Emergency Lighting

Performa TEMPUS® is a range of high quality and easy to fit: maintained and non-maintained 3 hour emergency lighting fixtures.

Ideal for UK compliant safe illuminated emergency exit from hotels, schools, hospitals, clubs, offices, shops, multi-story dwellings and other larger buildings.



EMERGENCY IP65 BULKHEAD 22


EMERGENCY METAL EXIT LIGHT BOX 22


EMERGENCY PLASTIC EXIT SIGN 23


EMERGENCY RECESSED EXIT SIGN 23


EMERGENCY HIGH BAY DOWNLIGHT 24


EMERGENCY LOW BAY DOWNLIGHT 24


EMERGENCY OPEN AREA DOWNLIGHT 25


EMERGENCY CORRIDOR DOWNLIGHT 25


EMERGENCY RECESSED OPEN AREA DOWNLIGHT 26


EMERGENCY CORRIDOR DOWNLIGHT 26



ACCESSORIES 27


2YR WARRANTY


MEGAMAN®

# TEMPUS®

## Self-Test 3 Hour Emergency LED Lighting

Performa EMERGENCY LIGHTING






## SELF-TEST EMERGENCY SLIM BULKHEAD

MAINTAINED/
NON-MAINTAINED

- Ni-MH battery included
- Corrosion resistant, durable polycarbonate housing
- Green and red colour status LED indicator
- All direction exit sign stickers included
- Surface mounted installation
- Self-test button located at the bottom of the fixture

SCAN THE QR CODE FOR MORE INFORMATION

2YR WARRANTY


IP65 | IK 03 | CLASS II | 23 PRODUCT DISCOUNT GROUP

PER BOX 1/12

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Battery Duration | IP Rating | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|
| **711052** | SELF-TEST EMERGENCY SLIM BULKHEAD | 4W | 6500K/80 | 140 | 3 hours | IP65 | 352x110x67 |

Operating temperature 0°C to +40°C






## SELF-TEST EMERGENCY METAL EXIT LIGHT BOX

MAINTAINED/
NON-MAINTAINED

- Ni-Cd battery included
- Durable steel housing with anti-corrosion powder coating
- Green and red colour status LED indicator
- Supplied with arrow down legend - other options available*
- Surface mounted installation
- Self-test button located at the bottom of the fixture

SCAN THE QR CODE FOR MORE INFORMATION

2YR WARRANTY

IP20 | IK 03 | CLASS II | 23 PRODUCT DISCOUNT GROUP

PER BOX 1/6

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Battery Duration | IP Rating | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|
| **711051** | SELF-TEST EMERGENCY METAL EXIT LIGHT BOX | 4.5W | 6500K/80 | 35 | 3 hours | IP20 | 190x390x62 |

Operating temperature 0°C to +40°C


*ACCESSORIES - SEE PAGE 27

MEGAMAN®

# TEMPUS®
## Self-Test 3 Hour Emergency LED Lighting

Performa EMERGENCY LIGHTING






## SELF-TEST EMERGENCY PLASTIC EXIT SIGN WALL MOUNTED
MAINTAINED

- Supplied with arrow left/right legend
- 24 hour charge time
- Ni-MH battery included
- Green and red colour status LED indicator
- Polycarbonate construction
- Easy mounting 1-side pictogram options available
- Self-test button located at the bottom of the fixture

SCAN THE QR CODE FOR MORE INFORMATION

2YR WARRANTY

IP20 | IK 03 | CLASS II | 23 PRODUCT DISCOUNT GROUP


PER BOX 1/8

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Battery Duration | IP Rating | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|
| **711050** | SELF-TEST EMERGENCY PLASTIC EXIT SIGN | 3.5W | 6500K/80 | 35 | 3 hours | IP20 | 316x54x196 |

Operating temperature 0°C to +40°C

*ACCESSORIES - SEE PAGE 27






## SELF-TEST EMERGENCY ULTRA SLIM RECESSED EXIT SIGN
MAINTAINED

- Ultra slim 2 sided emergency exit sign
- Ni-MH battery included
- Green and red colour status LED indicator
- Polycarbonate and aluminium construction:
- Green and red colour status LED indicator
- Self-test button located at the bottom of the fixture

SCAN THE QR CODE FOR MORE INFORMATION

2YR WARRANTY

IP20 | IK 03 | CLASS II | 23 PRODUCT DISCOUNT GROUP

PER BOX 1/6

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Battery Duration | IP Rating | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|
| **711049** | SELF-TEST EMERGENCY RECESSED EXIT SIGN | 2.8W | 6500K/80 | 35 | 3 hours | IP20 | 365x100x238 |


Operating temperature 0°C to +40°C

MEGAMAN®

# TEMPUS®
## Self-Test 3 Hour Emergency LED Lighting

Performa EMERGENCY LIGHTING






## SELF-TEST EMERGENCY HIGH BAY DOWNLIGHT
NON-MAINTAINED

- Surface mounted
- Advanced LiFePO4 battery included
- Corrosion resistant, durable polycarbonate housing
- Green and red colour status LED indicator
- Touch self-testing button located at the bottom of fixture
- Overcharge and over-discharge protection, over-temperature protection, short circuit protection

SCAN THE QR CODE FOR MORE INFORMATION

2YR WARRANTY


IP54 | IK 02 | CLASS II | 23 PRODUCT DISCOUNT GROUP

PER BOX 1/40

| Order Code | Description | Watts | Colour (K) | Lumens (lm) | Battery Duration | IP Rating | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|
| **711365** | SELF-TEST EMERGENCY HIGH BAY | 3W | 6000K/80 | 200 | 3 hours | IP54 | 130x130x35 |

Operating temperature 0°C to +40°C






## SELF-TEST EMERGENCY LOW BAY DOWNLIGHT
NON-MAINTAINED

- Compact in size
- Advanced LiFePO4 battery
- Green and red colour status LED indicator
- Touch self-testing button located at the bottom of fixture
- Low Bay optics of 20m max height
- Comply with EN 60598-2-22, UN 38 3 and IES 62133
- Overcharge and over-discharge protection, over- temperature protection, short circuit protection

SCAN THE QR CODE FOR MORE INFORMATION

2YR WARRANTY

IP54 | IK 03 | CLASS II | 23 PRODUCT DISCOUNT GROUP

PER BOX 1/40

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Battery Duration | IP Rating | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|
| **711366** | SELF-TEST EMERGENCY LOW BAY | 3W | 6000K/80 | 200 | 3 hours | IP54 | 130x130x35 |


Operating temperature 0°C to +40°C

MEGAMAN®

# TEMPUS®
## Self-Test 3 Hour Emergency LED Lighting

Performa EMERGENCY LIGHTING






## SELF-TEST EMERGENCY OPEN AREA DOWNLIGHT
NON-MAINTAINED

- Surface mounted
- 16 hour charge time
- Advanced LiFePO4 battery included
- Over-charge and over-discharge protection
- Over-temperature and short circuit protection
- Self-testing button
- 850°C glow-wiring test
- 50,000 hours rated life
- Green and red colour status LED indicator
- SELV Constant current output

SCAN THE QR CODE FOR MORE INFORMATION

2YR WARRANTY


IP54 | IK 03 | CLASS II | 23 PRODUCT DISCOUNT GROUP

PER BOX 1/40

| Order Code | Description | Watts | Colour (K) | Lumens (lm) | Battery Duration | IP Rating | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|
| **711046** | SELF-TEST EMERGENCY OPEN AREA DOWNLIGHT | 1W | 6000K/80 | 130 | 3 hours | IP54 | 130x130x35 |

Operating temperature 0°C to +40°C






## SELF-TEST EMERGENCY CORRIDOR DOWNLIGHT
NON-MAINTAINED

- Surface mounted
- 16 hour charge time
- Advanced LiFePO4 battery included
- Over-charge and over-discharge protection
- Over-temperature and short circuit protection
- Self-testing button
- 850°C glow-wiring test
- 50,000 hours rated life
- Green and red colour status LED indicator
- SELV Constant current output

SCAN THE QR CODE FOR MORE INFORMATION

2YR WARRANTY

IP54 | IK 03 | CLASS II | 23 PRODUCT DISCOUNT GROUP

PER BOX 1/40

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Battery Duration | IP Rating | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|
| **711047** | SELF-TEST EMERGENCY CORRIDOR DOWNLIGHT | 1W | 6000K/80 | 130 | 3 hours | IP54 | 130x130x35 |

Operating temperature 0°C to +40°C


MEGAMAN®

# TEMPUS®

## Self-Test 3 Hour Emergency LED Lighting

Performa EMERGENCY LIGHTING




ø36mm Hole Cut-out

### SELF-TEST EMERGENCY OPEN AREA DOWNLIGHT
NON-MAINTAINED

- Recessed installation
- 16 hour charge time
- Advanced LiFePO4 battery included
- Green and red colour status LED indicator
- Self-test button located at the bottom of the fixture
- Overcharge and over-discharge protection, over-temperature protection, short circuit protection
- 850°C glow-wiring test
- 50,000 hours rated life
- SELV Constant current output

SCAN THE QR CODE FOR MORE INFORMATION

2YR WARRANTY


IP20 | IK 02 | CLASS II | 23 PRODUCT DISCOUNT GROUP

PER BOX 1/40

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Battery Duration | IP Rating | Dimensions (WxDia mm) |
|---|---|---|---|---|---|---|---|
| **711044** | SELF-TEST EMERGENCY OPEN AREA DOWNLIGHT | 1W | 6000K/80 | 120 | 3 hours | IP20 | 23x40 |

Operating temperature 0°C to +40°C




ø36mm Hole Cut-out

### SELF-TEST EMERGENCY CORRIDOR DOWNLIGHT
NON-MAINTAINED

- Recessed installation
- 16 hour charge time
- Advanced LiFePO4 battery included
- Green and red colour status LED indicator
- Self-test button located at the bottom of the fixture
- Overcharge and over-discharge protection, over-temperature protection, short circuit protection
- 850°C glow-wiring test
- 50,000 hours rated life
- SELV Constant current output

SCAN THE QR CODE FOR MORE INFORMATION

2YR WARRANTY

IP20 | IK 02 | CLASS II | 23 PRODUCT DISCOUNT GROUP

PER BOX 1/40

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Battery Duration | IP Rating | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|
| **711045** | SELF-TEST EMERGENCY CORRIDOR DOWNLIGHT | 1W | 6000K/80 | 120 | 3 hours | IP20 | 23x40 |

Operating temperature 0°C to +40°C

# TEMPUS®

Self-Test 3 Hour Emergency LED Lighting

Performa EMERGENCY LIGHTING

## Accessories

| Order Code | Description | IDC Code | Box Quantity |
|---|---|---|---|
| **710478** | EXTRA ARROW LEFT SIGN FOR **711051 SELF-TEST EMERGENCY METAL EXIT LIGHT BOX** | 23 | 1/100 |
| **710479** | EXTRA ARROW RIGHT SIGN FOR **711051 SELF-TEST EMERGENCY METAL EXIT LIGHT BOX** | 23 | 1/100 |
| **710491** | EXTRA ARROW UP SIGN FOR **711051 SELF-TEST EMERGENCY METAL EXIT LIGHT BOX** | 23 | 1/100 |
| **710489** | DIRECTION PVC ARROW LEFT/RIGHT FOR **711050 SELF-TEST EMERGENCY PLASTIC EXIT SIGN** | 23 | 1/100 |
| **710492** | DIRECTION PVC ARROW UP FOR **711050 SELF-TEST EMERGENCY PLASTIC EXIT SIGN** | 23 | 1/100 |

essentials

# VALUE FOR MONEY, RELIABLE, EVERYDAY LED FIXTURE RANGE



# LED Fixtures Range

For cost-effective, staple products, the Essentials range should be every contractor and wholesaler's go-to. Providing reliability over innovation, Essentials solutions are there for the day-to-day, delivering in terms of cost and results for both retrofit and new-build installations.



BERTO BACKLIT UGR<19 LED PANEL 30



KEO IP65 LED HIGH BAY 31



VOSS IP65 LED FLOODLIGHT 32



VOSS WITH PR SENSOR LED FLOODLIGHT 33



KATIA IP40 ULTRA SLIM LED BULKHEAD 34



RONDA IP65 CORROSION FREE LED BULKHEAD 35



GARRON INDOOR LED BATTEN 36



GARRON EMERGENCY INDOOR LED BATTEN 37



ROCCA SINGLE & TWIN OUTPUT IP65 LED BATTEN 38



ROCCA EMERGENCY SINGLE & TWIN OUTPUT IP65 LED BATTEN 39



TEGO SLIM IP65 DIMMING FIRE-RATED DOWNLIGHT 40



KANA IP40 RECESSED SLIM LED DOWNLIGHT 41

3YR WARRANTY

# BERTO BACKLIT


## UGR<19 Square and Rectangular Backlit TPa LED Panels with Non-Dimming Driver

*essentials*
**LED PANEL**

IP40 | CLASS II | 20 PRODUCT DISCOUNT GROUP | UGR 19 | Flicker Free ≤3% | 3h | PUSH-FIT CONNECTOR | PER BOX 2/1* *595x595mm Square Panels | PER BOX 1/4* *595x1195mm Rectangular Panels

5YR WARRANTY ON LED PANEL & DRIVER & 2YR ON-SITE WARRANTY



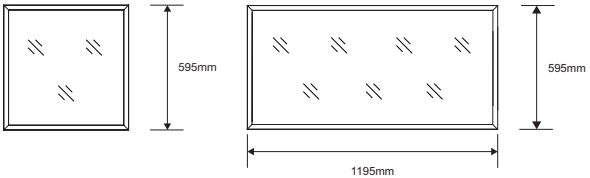


- IP40
- 5 Year warranty on panel & driver
- Surface and suspension mounting kits available separately
- Up to 100 lumen per system watt efficacy
- Perfect for shallow ceiling voids
- Quick & easy installation
- Lightweight LED panel with non discolouring TPa rated diffusers
- Suitable for use in exposed T-grid ceilings
- Ideal for general lighting use
- Long maintenance period and low lumen depreciation
- Can be used as part of a Part L building compliance

SCAN THE QR CODE FOR MORE INFORMATION

**Photometric data:** Please refer to our website for up to date photometric information.

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Dimmable | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|---|
| **710675** | UGR19 TPa BACKLIT (SQUARE) PANEL WITH DRIVER - 2 PACK | 36W | 4000K / 80 | 3600 | N | 110° | 50,000 | 595x595x33 |
| **710676** | UGR19 TPa BACKLIT (SQUARE) PANEL WITH DRIVER - 2 PACK | 36W | 6500K / 80 | 3600 | N | 110° | 50,000 | 595x595x33 |
| **711081** | UGR19 TPa BACKLIT (RECTANGULAR) PANEL WITH DRIVER | 43W | 4000K / 80 | 4600 | N | 120° | 50,000 | 1195x595x33 |
| **711082** | UGR19 TPa BACKLIT (RECTANGULAR) PANEL WITH DRIVER | 43W | 6500K / 80 | 4600 | N | 120° | 50,000 | 1195x595x33 |

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

ACCESSORIES



**710502BACKLIT** Emergency Kit for Backlit panels with Connectors



**110110** 50W Dimmable LED Driver




**711473** Y Type Suspension Kit for Panel



**710941** 37W DALi 2 Dimming Driver



**710940** Loop Through Junction Box with 3 Pin



**710933** Surface Mounted Frame 600x600x64mm
**712002** Surface Mounted Frame 1200x600x64mm

**710993BACKLIT - Spare Driver**

# KEO

## IP65 Integrated LED High Bay with Remote Controller option

*essentials*
**HIGH BAY**

IP65 | IK 08 | Microwave Motion Sensor | Flicker Free ≤3% | 3h | CLASS I | 20 PRODUCT DISCOUNT GROUP | Selectable Lumen Output | PUSH-FIT CONNECTION | PER BOX 1/1

**3YR WARRANTY**

**& 2YR ON-SITE WARRANTY**



- Replacement for traditional high bay in durable die-cast aluminium with anti-corrosion powder coating
- High luminous efficacy with up to 135Olm/W
- Easy installation with single point hook mounting design
- Twist and lock modular microwave motion sensor option
- Surface mounted bracket as optional accessory
- Equipped with 100cm length H05RN-F 3*1.0mm2 power cable
- High surge protection level: 4000V (L-N) ; 6000V (L,N-PE)
- Operation temperature -30˚to +50˚
- Dimming via Microwave Sensor only










SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Description | Watts | Colour Temp (K)/ CRI | Lumens (lm) | Dimmable | Beam Angle | Hrs Lamp Life (max) | Dimensions (HxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **711260** | KEO IP65 HIGH BAY | 100W | 4000K / 80 | 13500 | N | 110° | 50,000 | 175x262 |
| **711260EMG** | KEO IP65 HIGH BAY WITH EMERGENCY | 100W | 4000K / 80 | 13500 | N | 110° | 50,000 | 175x262 |
| **711261** | KEO IP65 HIGH BAY | 150W | 4000K / 80 | 20300 | N | 110° | 50,000 | 175x301 |
| **711261EMG** | KEO IP65 HIGH BAY WITH EMERGENCY | 150W | 4000K / 80 | 20300 | N | 110° | 50,000 | 175x301 |
| **711263** | KEO IP65 HIGH BAY | 200W | 4000K / 80 | 27000 | N | 110° | 50,000 | 175x350 |
| **711263EMG** | KEO IP65 HIGH BAY WITH EMERGENCY | 200W | 4000K / 80 | 27000 | N | 110° | 50,000 | 175x350 |

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

ACCESSORIES



**711264**
Microwave Motion Sensor for KEO




Surface Mounting Bracket
**711321** - 100W KEO
**711322** - 150W KEO
**711323** - 200W KEO



**711320**
KEO High Bay Remote Control

**MEGAMAN® KEO** microwave sensor detects movement within around 4m radius horizontally when mounted at 16m height and an optimal 16m radius when mounted at 6m height.



MEGAMAN®

# VOSS

## IP65 Integrated LED Floodlight
## Pre-flexed with 500mm fly lead

essentials
**FLOODLIGHT**

IP65 | IK 08 | CLASS I | 20 PRODUCT DISCOUNT GROUP

711292 PER BOX 1/40 | 711293 PER BOX 1/30 | 711295 PER BOX 1/16


**3YR WARRANTY**




- IP65 and IK08 rated
- Slim and extra light weight
- Pre-flexed with 500mm fly lead
- Textured diffuser
- Available in 5 different sizes
- Die cast aluminium housing
- Adjustable fixing bracket ±180°
- Wide area floodlight without glare
- Simple installation
- Suitable for outdoor use
- Flexible tilting and positioning
- Corrosion free & UV resistant housing.
- Tempered glass

SCAN THE QR CODE FOR MORE INFORMATION




| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Dimmable | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|---|
| **711285** | VOSS IP65 FLOODLIGHT | 10W | 4000K/80 | 900 | N | 110° | 30,000 | 103x23x104 |
| **711286** | VOSS IP65 FLOODLIGHT | 20W | 4000K/80 | 1800 | N | 110° | 30,000 | 121x24x119 |
| **711288** | VOSS IP65 FLOODLIGHT | 50W | 4000K/80 | 4500 | N | 110° | 30,000 | 206x36x195 |
| **711289** | VOSS IP65 FLOODLIGHT | 100W | 4000K/80 | 9000 | N | 110° | 30,000 | 274x32x238 |
| **711291** | VOSS IP65 FLOODLIGHT | 200W | 4000K/80 | 18000 | N | 110° | 30,000 | 381x40x324 |

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

# VOSS with PIR Sensor

IP54 Integrated LED Floodlight
Pre-flexed with 500mm fly lead

essentials
**FLOODLIGHT**

IP54 | IK 08 | PIR Sensor | CLASS I | 20 PRODUCT DESIGNER GROUP

PER BOX 1/40 — 711285 711286
PER BOX 1/16 — 711288
PER BOX 1/10 — 711289

**3YR WARRANTY**



- Slim and extra light weight
- Pre-flexed with 500mm fly lead
- Textured diffuser
- Available in 3 different sizes
- Die cast housing
- Adjustable fixing bracket +180 °
- Wide area floodlight without glare
- Simple installation
- Suitable for outdoor use
- Flexible tilting and positioning
- Corrosion free & UV resistant housing
- Tempered glass
- Directly connected. PIR Sensor can not be removed

SCAN THE QR CODE FOR MORE INFORMATION


**Photometric data:** Please refer to our website for up to date photometric information.












## SENSOR

**Time: 3 seconds - 8 minutes**
**Sensitivity can be adjusted**
**Lux can be adjusted**

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Dimmable | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|---|
| **711292** | VOSS IP54 FLOODLIGHT WITH PR SENSOR | 11W | 4000K/80 | 900 | N | 110° | 30,000 | 104x45x154 |
| **711293** | VOSS IP54 FLOODLIGHT WITH PR SENSOR | 21W | 4000K/80 | 1800 | N | 110° | 30,000 | 121x45x163 |
| **711295** | VOSS IP65 FLOODLIGHT WITH PR SENSOR | 51W | 4000K/80 | 4500 | N | 110° | 30,000 | 206x45x230 |

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

MEGAMAN®

# KATIA

## IP40 Ultra Slim Integrated LED Indoor Bulkhead

essentials
**BULKHEAD**

IP40 | IK 08 | CLASS II | 20 PRODUCT DISCOUNT GROUP

711329 711330 — PER BOX 1/20

711331 — PER BOX 1/10

711332 — PER BOX 1/8


**3YR WARRANTY**



- Round and ultra slim profile
- Flicker Free
- 4 sizes and wattages to choose from
- Direct alternatives to traditional wall and ceiling lamp
- Easy installation
- Operation temperature -20°C to 40°C

SCAN THE QR CODE FOR MORE INFORMATION

**Photometric data:** Please refer to our website for up to date photometric information.

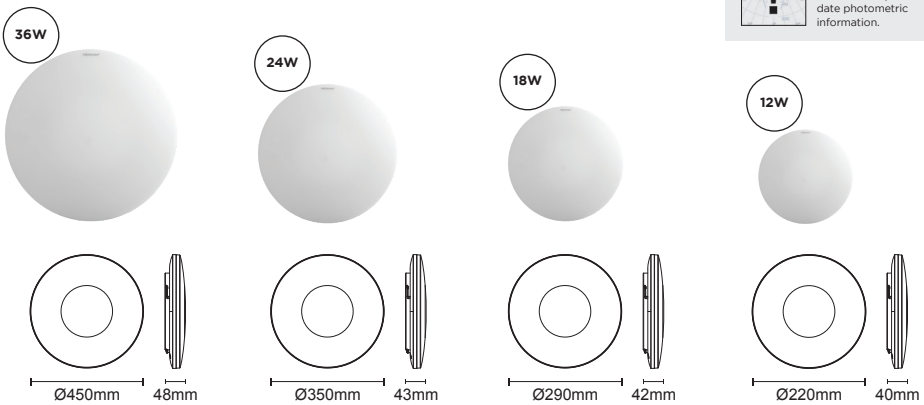


| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Dimmable | Beam Angle | Hrs Lamp Life (max) | Dimensions (DiaxH mm) |
|---|---|---|---|---|---|---|---|---|
| **711329** | KATIA INDOOR BULKHEAD | 12W | 4000K/80 | 1200 | N | 120° | 25,000 | 220x40 |
| **711330** | KATIA INDOOR BULKHEAD | 18W | 4000K/80 | 1800 | N | 120° | 25,000 | 290x42 |
| **711331** | KATIA INDOOR BULKHEAD | 24W | 4000K/80 | 2400 | N | 120° | 25,000 | 350x43 |
| **711332** | KATIA INDOOR BULKHEAD | 36W | 4000K/80 | 3600 | N | 120° | 25,000 | 450x48 |

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

MEGAMAN®

# RONDA

## IP65 Integrated LED Corrosion Free Outdoor Bulkhead

essentials
**BULKHEAD**

IP65 | IK 08 | Flicker Free ≤3% | CLASS II | 20 PRODUCT DISCOUNT GROUP

PER BOX 1/5 — 711411, 711412

PER BOX 1/10 — 711413

**3YR WARRANTY**





- IP65 and IK08 robust corrosion free polycarbonate ring
- Cost effective LED Outdoor Bulkhead solution for mains voltage
- UV resistant opal diffuser
- Up to 92lm/W
- Operation temperature -20°C to 40°C

SCAN THE QR CODE FOR MORE INFORMATION

**Photometric data:** Please refer to our website for up to date photometric information.




| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Dimmable | Beam Angle | Hrs Lamp Life (max) | Dimensions (DiaxH mm) |
|---|---|---|---|---|---|---|---|---|
| **711411** | RONDA IP65 OUTDOOR BULKHEAD | 12W | 4000K/80 | 1100 | N | 120° | 30,000 | 270x95 |
| **711412** | RONDA IP65 OUTDOOR BULKHEAD | 18W | 4000K/80 | 1650 | N | 120° | 30,000 | 320x100 |
| **711413** | RONDA IP65 OUTDOOR BULKHEAD | 24W | 4000K/80 | 2200 | N | 120° | 30,000 | 320x100 |

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

MEGAMAN®

# GARRON

## Integrated LED Indoor Batten
## BESA box compatible

*essentials*
**BATTEN**

IP20 | IK 08 | Flicker Free ≤3% | CLASS I | 20 PRODUCT DISCOUNT GROUP | PER BOX 1/9

**3YR WARRANTY**








- IP20
- IK08
- Replacement for conventional indoor batten
- 4 different lengths - 2ft, 4ft, 5ft and 6ft
- Up to 120 lumens per system watt efficacy
- Easy installation and toolless wiring
- BESA box compatible
- Traditional batten appearance

SCAN THE QR CODE FOR MORE INFORMATION

**Photometric data:** Please refer to our website for up to date photometric information.

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Dimmable | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|---|
| **711338** | GARRON BATTEN (2FT) | 10W | 4000K/80 | 1200 | N | 110° | 30,000 | 620x64x65 |
| **711334** | GARRON BATTEN (2FT) | 17W | 4000K/80 | 2040 | N | 110° | 30,000 | 620x64x65 |
| **711339** | GARRON BATTEN (4FT) | 20W | 4000K/80 | 2400 | N | 110° | 30,000 | 1200x64x65 |
| **711335** | GARRON BATTEN (4FT) | 40W | 4000K/80 | 4800 | N | 110° | 30,000 | 1200x64x65 |
| **711340** | GARRON BATTEN (5FT) | 30W | 4000K/80 | 3600 | N | 110° | 30,000 | 1500x64x65 |
| **711336** | GARRON BATTEN (5FT) | 60W | 4000K/80 | 7200 | N | 110° | 30,000 | 1500x64x65 |
| **711341** | GARRON BATTEN (6FT) | 40W | 4000K/80 | 4800 | N | 110° | 30,000 | 1800x64x65 |
| **711337** | GARRON BATTEN (6FT) | 65W | 4000K/80 | 7800 | N | 110° | 30,000 | 1800x64x65 |

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

MEGAMAN®

# GARRON Emergency


## Integrated LED Indoor Batten
## BESA box compatible

*essentials*
**BATTEN**

IP20 | IK 08 | Flicker Free ≤3% | 3h | CLASS I | 20 PRODUCT DESIGNE GROUP | PER BOX 1/9








- IP20
- IK08
- Built-in 3 hour emergency kit
- Replacement for conventional indoor batten
- 4 different lengths - 2ft, 4ft, 5ft and 6ft
- Up to 118 lumen per system watt efficacy
- Easy installation and toolless wiring
- BESA box compatible
- Traditional batten appearance

SCAN THE QR CODE FOR MORE INFORMATION

**Photometric data:** Please refer to our website for up to date photometric information.

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Dimmable | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|---|
| **712065** | GARRON BATTEN (2FT) | 11W | 4000K/80 | 1200 | N | 110° | 30,000 | 620x64x65 |
| **712061** | GARRON BATTEN (2FT) | 18W | 4000K/80 | 2040 | N | 110° | 30,000 | 620x64x65 |
| **712066** | GARRON BATTEN (4FT) | 21W | 4000K/80 | 2400 | N | 110° | 30,000 | 1200x64x65 |
| **712062** | GARRON BATTEN (4FT) | 41W | 4000K/80 | 4800 | N | 110° | 30,000 | 1200x64x65 |
| **712067** | GARRON BATTEN (5FT) | 31W | 4000K/80 | 3600 | N | 110° | 30,000 | 1500x64x65 |
| **712063** | GARRON BATTEN (5FT) | 61W | 4000K/80 | 7200 | N | 110° | 30,000 | 1500x64x65 |
| **712068** | GARRON BATTEN (6FT) | 41W | 4000K/80 | 4800 | N | 110° | 30,000 | 1800x64x65 |
| **712064** | GARRON BATTEN (6FT) | 66W | 4000K/80 | 7800 | N | 110° | 30,000 | 1800x64x65 |

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

MEGAMAN®

# ROCCA

## IP65 Weatherproof Integrated LED Batten Single and Twin Output

*essentials*
**BATTEN**

IP65 | IK 08 | Flicker Free ≤3% | CLASS I | 20 PRODUCT DISCOUNT GROUP | PER BOX 1/6

3YR WARRANTY


2YR & ON-SITE WARRANTY



- IP65
- IK08
- Replacement for conventional fluorescent weatherproof batten
- 3 different lengths in both single and twin output
- Up to 129 lumen per system watt efficacy
- Easy installation and toolless wiring
- BESA box compatible
- Substantial energy and maintenance savings

SCAN THE QR CODE FOR MORE INFORMATION

**Photometric data:** Please refer to our website for up to date photometric information.




| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Dimmable | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|---|
| **711345** | ROCCA IP65 SINGLE OUTPUT BATTEN | 20W | 4000K/80 | 2500 | N | 110° | 40,000 | 1270x76x83 |
| **711346** | ROCCA IP65 SINGLE OUTPUT BATTEN | 28W | 4000K/80 | 3600 | N | 110° | 40,000 | 1570x76x83 |
| **711347** | ROCCA IP65 SINGLE OUTPUT BATTEN | 34W | 4000K/80 | 4200 | N | 110° | 40,000 | 1865x148x86 |
| **711342** | ROCCA IP65 TWIN OUTPUT BATTEN | 40W | 4000K/80 | 4800 | N | 110° | 40,000 | 1265x102x86 |
| **711343** | ROCCA IP65 TWIN OUTPUT BATTEN | 56W | 4000K/80 | 6000 | N | 110° | 40,000 | 1565x102x86 |
| **711344** | ROCCA IP65 TWIN OUTPUT BATTEN | 70W | 4000K/80 | 9100 | N | 110° | 40,000 | 1865x148x86 |

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

MEGAMAN®

# ROCCA Emergency

## IP65 Weatherproof Integrated LED Batten Single and Twin Output

*essentials*
**BATTEN**

IP65 | IK 08 | Flicker Free ≤3% | 3h | CLASS I | 20 PRODUCT DISCOUNT GROUP | PER BOX 1/6


3YR WARRANTY & 2YR ON-SITE WARRANTY



- IP20
- IK08
- Built-in 3 hour emergency kit
- Replacement for conventional indoor batten
- 3 different lengths in both single and twin output
- Up to 129 lumen per system watt efficacy
- Easy installation and toolless wiring
- BESA box compatible
- Traditional batten appearance

SCAN THE QR CODE FOR MORE INFORMATION

**Photometric data:** Please refer to our website for up to date photometric information.




| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Dimmable | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|---|
| **712120** | ROCCA EMERGENCY IP65 SINGLE OUTPUT BATTEN | 38W | 4000K/80 | 4200 | N | 110° | 40,000 | 1865x148x86 |
| **712069** | ROCCA EMERGENCY IP65 TWIN OUTPUT BATTEN | 44W | 4000K/80 | 4800 | N | 110° | 40,000 | 1265x102x86 |
| **712070** | ROCCA EMERGENCY IP65 TWIN OUTPUT BATTEN | 60W | 4000K/80 | 6000 | N | 110° | 40,000 | 1565x102x86 |
| **712071** | ROCCA EMERGENCY IP65 TWIN OUTPUT BATTEN | 74W | 4000K/80 | 9100 | N | 110° | 40,000 | 1865x148x86 |

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

MEGAMAN®

# TEGO SLIM

## IP65 Fully Fire-Rated Dimming Integrated LED Downlight

essentials **DOWNLIGHT**

IP65 | Dimmable | CLASS II | 21 PRODUCT DISCOUNT GROUP | TOOL-FREE CONNECTION | Flicker Free ≤3% | EARTH CONTINUITY | PER BOX 1/8

**3YR WARRANTY**






- IP65 rated. Ideal for high moisture areas e.g. bathrooms
- Toolless wiring block and push-in terminal ensure easy install
- Flexible Loop in/Loop out feature enables for quick connection
- Triac Dimmable as standard
- Up to 86 lumen per system watt efficacy
- Available in either White or Brushed Nickel finishes
- Fully fire-rated for 30/60/90 minute ceilings
- Slim and compact design ideal for shallow ceiling recesses
- Competitively priced
- Great value 10 Pack

SCAN THE QR CODE FOR MORE INFORMATION

**Photometric data:** Please refer to our website for up to date photometric information.




| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Dimmable | Beam Angle | Hrs Lamp Life (max) | Dimensions (DiaxH mm) |
|---|---|---|---|---|---|---|---|---|
| **711128** | TEGO SLIM FR DIMMING DOWNLIGHT BRUSHED NICKEL - 10 PACK | 5.5W | 2800K/80 | 450 | Y | 90° | 25,000 | 83x51 |
| **711142** | TEGO SLIM FR DIMMING DOWNLIGHT BRUSHED NICKEL - 10 PACK | 5.5W | 4000K/80 | 450 | Y | 90° | 25,000 | 83x51 |
| **711126** | TEGO SLIM FR DIMMING DOWNLIGHT WHITE - 10 PACK | 5.5W | 2800K/80 | 450 | Y | 90° | 25,000 | 83x51 |
| **711140** | TEGO SLIM FR DIMMING DOWNLIGHT WHITE - 10 PACK | 5.5W | 4000K/80 | 450 | Y | 90° | 25,000 | 83x51 |

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

MEGAMAN®

# KANA

## IP40 Slim Recessed Integrated LED Downlight

essentials **DOWNLIGHT**

IP40 | IK 04 | Flicker Free ≤3% | CLASS II | 20 PRODUCT DISCOUNT GROUP

PER BOX 1/60 — 711417, 711418, 711419

PER BOX 1/40 — 711420, 711421


**3YR WARRANTY**



- IP40 and IK03 rated
- Compact and slim recessed integrated LED downlight ideal for limited ceiling depths
- Flicker Free
- Up to 80 lumen per system watt efficacy
- Replacement for traditional CFL downlights
- No external driver required
- Delivers uniform light distribution
- Range of sizes allowing retrofit for many conventional downlights in existing ceiling cut-outs

SCAN THE QR CODE FOR MORE INFORMATION

**Photometric data:** Please refer to our website for up to date photometric information.

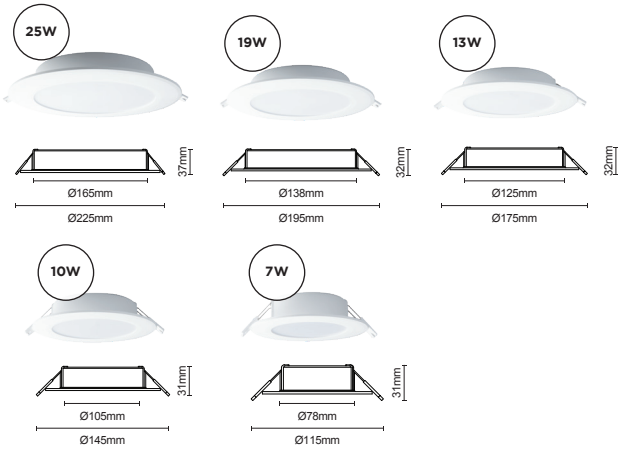


ACCESSORIES




**EMG147247**
5W-7W GU10
Emergency Pack
EMC Compliant

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Dimmable | Beam Angle | Hrs Lamp Life (max) | Dimensions (DiaxH mm) |
|---|---|---|---|---|---|---|---|---|
| **711417** | KANA RECESSED DOWNLIGHT | 7W | 4000K/80 | 560 | N | 120° | 30,000 | 115x31 |
| **711418** | KANA RECESSED DOWNLIGHT | 10W | 4000K/80 | 800 | N | 120° | 30,000 | 145x31 |
| **711419** | KANA RECESSED DOWNLIGHT | 13W | 4000K/80 | 1040 | N | 120° | 30,000 | 175x32 |
| **711420** | KANA RECESSED DOWNLIGHT | 19W | 4000K/80 | 1520 | N | 120° | 30,000 | 195x32 |
| **711421** | KANA RECESSED DOWNLIGHT | 25W | 4000K/80 | 2000 | N | 120° | 30,000 | 225x37 |

Output and lamp life stated are maximum 'up to' figures achieved. Operating temperature -30°C to +40°C

essentials

# TEMPUS® EMERGENCY LIGHTING SOLUTIONS



# TEMPUS® Emergency Lighting

MEGAMAN® Essentials TEMPUS® is a cost effective, economy range of easy to install, maintained and non-maintained 3 hour emergency lighting solutions.

Ideal for UK compliant safe illuminated emergency exit from hotels, schools, hospitals, clubs, offices, shops, multi-story dwellings and other larger buildings.



EMERGENCY IP65 SLIM BULKHEAD 44


EMERGENCY METAL EXIT LIGHT BOX 44


EMERGENCY PLASTIC EXIT SIGN 45


EMERGENCY SUSPENDED EXIT SIGN 45


EMERGENCY DOUBLE SIDED RECESSED EXIT SIGN 46


EMERGENCY TWIN SPOT IP65 LIGHT 46


EMERGENCY OPEN AREA DOWNLIGHT 47


EMERGENCY CORRIDOR DOWNLIGHT 47


EMERGENCY RECESSED OPEN AREA DOWNLIGHT 48


EMERGENCY RECESSED CORRIDOR DOWNLIGHT 48


ACCESSORIES 49



2YR WARRANTY

MEGAMAN®

# TEMPUS®
## 3 Hour Emergency LED Lighting

essentials
**EMERGENCY LIGHTING**






## EMERGENCY SLIM BULKHEAD
MAINTAINED/
NON-MAINTAINED

- Ni-MH battery included
- Corrosion resistant, durable polycarbonate housing
- Green and red colour status LED indicator
- All direction exit sign stickers included
- Surface mounted installation

SCAN THE QR CODE FOR MORE INFORMATION

2YR WARRANTY


IP65 | IK 03 | CLASS II | 23 PRODUCT DISCOUNT GROUP

PER BOX 1/12

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Battery Duration | IP Rating | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|
| **710474** | EMERGENCY SLIM BULKHEAD | 4W | 6500K/80 | 140 | 3 hours | IP65 | 352x110x67 |

Operating temperature 0°C to +40°C






## EMERGENCY METAL EXIT LIGHT BOX
MAINTAINED/
NON-MAINTAINED

- Ni-Cd battery included
- Durable steel housing with anti-corrosion powder coating
- Green and red colour status LED indicator
- Supplied with arrow down legend - other options available*
- Surface mounted installation

SCAN THE QR CODE FOR MORE INFORMATION

2YR WARRANTY

IP20 | IK 03 | CLASS II | 23 PRODUCT DISCOUNT GROUP

PER BOX 1/6

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Battery Duration | IP Rating | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|
| **710476** | EMERGENCY METAL EXIT LIGHT BOX | 5W | 6500K/80 | 35 | 3 hours | IP20 | 190x390x62 |


Operating temperature 0°C to +40°C

*ACCESSORIES - SEE PAGE 49

# TEMPUS®
## 3 Hour Emergency LED Lighting

essentials
EMERGENCY LIGHTING






## EMERGENCY EXIT PLASTIC SIGN WALL MOUNTED
MAINTAINED

- Supplied with arrow left/right legend
- 24 hour charge time
- Ni-MH battery included
- Green and red colour status LED indicator
- Polycarbonate construction
- Easy mounting 1-side pictogram options available
- Self-test button located at the bottom of the fixture

SCAN THE QR CODE FOR MORE INFORMATION

2YR WARRANTY

IP20 | IK 03 | CLASS II | 23 PRODUCT DISCOUNT GROUP


PER BOX 1/8

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Battery Duration | IP Rating | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|
| **710488** | EMERGENCY EXIT PLASTIC SIGN | 3.5W | 6500K/80 | 35 | 3 hours | IP20 | 316x54x196 |

Operating temperature 0°C to +40°C

*ACCESSORIES - SEE PAGE 49






## EMERGENCY EXIT PLASTIC SUSPENDED SIGN
MAINTAINED

- Ceiling and cord suspended emergency exit sign
- 24 hour charge time
- Ni-MH battery included
- Green colour status LED indicator
- Polycarbonate construction
- Light in weight for easy install
- Max. 350mm length suspension cord
- Easy mounting 2-side pictograms options available

SCAN THE QR CODE FOR MORE INFORMATION

2YR WARRANTY

IP20 | IK 03 | CLASS II | 23 PRODUCT DISCOUNT GROUP

PER BOX 1/8

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Battery Duration | IP Rating | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|
| **710487** | EMERGENCY EXIT PLASTIC SIGN | 3.5W | 6500K/80 | 35 | 3 hours | IP20 | 316x54x196 |


Operating temperature 0°C to +40°C

*ACCESSORIES - SEE PAGE 49

# TEMPUS®
## 3 Hour Emergency LED Lighting

essentials
EMERGENCY LIGHTING






## EMERGENCY ULTRA SLIM DOUBLE SIDED RECESSED EXIT SIGN
MAINTAINED

- 24 hour charge time
- Included advanced high specification Ni-MH battery
- Polycarbonate and aluminium construction
- Double sided pictogram recessed emergency exit sign
- Green colour status LED indicator
- Light in weight for easy install

SCAN THE QR CODE FOR MORE INFORMATION

2YR WARRANTY


IP20 | IK 03 | CLASS II | 23 PRODUCT DISCOUNT GROUP

PER BOX 1/6

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Battery Duration | IP Rating | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|
| **710978** | EMERGENCY DOUBLE SIDED RECESSED EXIT SIGN | 2.8W | 6500K/80 | 35 | 3 hours | IP20 | 365x238x100 |

Operating temperature 0°C to +40°C






## EMERGENCY TWIN SPOT LIGHT
NON-MAINTAINED

- 24 hour charge time
- Included advanced high specification Ni-Cd battery
- Polycarbonate diffuser, corrosion resistant
- Rotate and tilt lighting direction
- Green colour status LED indicator
- Light in weight for easy install

SCAN THE QR CODE FOR MORE INFORMATION

2YR WARRANTY

IP65 | IK 03 | CLASS II | 23 PRODUCT DISCOUNT GROUP

PER BOX 1/5

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Battery Duration | IP Rating | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|
| **710485** | EMERGENCY TWIN SPOT LIGHT | 2.3W | 6500K/80 | 400 | 3 hours | IP65 | 300x82x294 |


Operating temperature 0°C to +40°C

MEGAMAN®

# TEMPUS®
## 3 Hour Emergency LED Lighting

essentials
EMERGENCY LIGHTING






## EMERGENCY OPEN AREA DOWNLIGHT
NON-MAINTAINED

- Surface mounted
- 16 hour charge time
- Advanced LiFePO4 battery included
- Over-charge and over-discharge protection
- Over-temperature and short circuit protection
- Self-testing button
- 50,000 hours rated life
- Green and red colour status LED indicator
- SELV Constant current output

SCAN THE QR CODE FOR MORE INFORMATION

2YR WARRANTY


IP54 | IK 03 | CLASS II | 23 PRODUCT DISCOUNT GROUP

PER BOX 1/40

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Battery Duration | IP Rating | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|
| **710482** | EMERGENCY OPEN AREA DOWNLIGHT | 1W | 6000K/80 | 130 | 3 hours | IP54 | 130x130x35 |

Operating temperature 0°C to +40°C






## EMERGENCY CORRIDOR DOWNLIGHT
NON-MAINTAINED

- Surface mounted
- 16 hour charge time
- Advanced LiFePO4 battery included
- Over-charge and over-discharge protection
- Over-temperature and short circuit protection
- Self-testing button
- 50,000 hours rated life
- Green and red colour status LED indicator
- SELV Constant current output

SCAN THE QR CODE FOR MORE INFORMATION

2YR WARRANTY

IP54 | IK 03 | CLASS II | 23 PRODUCT DISCOUNT GROUP

PER BOX 1/40

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Battery Duration | IP Rating | Dimensions (LxWxH mm) |
|---|---|---|---|---|---|---|---|
| **710483** | EMERGENCY CORRIDOR DOWNLIGHT | 1W | 6000K/80 | 130 | 3 hours | IP54 | 130x130x35 |


Operating temperature 0°C to +40°C

MEGAMAN®

# TEMPUS®
## 3 Hour Emergency LED Lighting

essentials
EMERGENCY LIGHTING




ø36mm Hole Cut-out

## EMERGENCY OPEN AREA DOWNLIGHT
NON-MAINTAINED

- Recessed installation
- 16 hour charge time
- Advanced LiFePO4 battery included
- Green and red colour status LED indicator
- Self-test button located at the bottom of the fixture
- Overcharge and over-discharge protection, over-temperature protection, short circuit protection
- 50,000 hours rated life
- SELV Constant current output

SCAN THE QR CODE FOR MORE INFORMATION

2YR WARRANTY


IP20 | IK 02 | CLASS II | 23 PRODUCT DISCOUNT GROUP

PER BOX 1/40

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Battery Duration | IP Rating | Dimensions (WxDia mm) |
|---|---|---|---|---|---|---|---|
| **710480** | EMERGENCY OPEN AREA DOWNLIGHT | 1W | 6000K/80 | 120 | 3 hours | IP20 | 23x40 |

Operating temperature 0°C to +40°C




ø36mm Hole Cut-out

## EMERGENCY CORRIDOR DOWNLIGHT
NON-MAINTAINED

- Recessed installation
- 16 hour charge time
- Advanced LiFePO4 battery included
- Green and red colour status LED indicator
- Self-test button located at the bottom of the fixture
- Overcharge and over-discharge protection, over-temperature protection, short circuit protection
- 50,000 hours rated life
- SELV Constant current output

SCAN THE QR CODE FOR MORE INFORMATION

2YR WARRANTY

IP20 | IK 02 | CLASS II | 23 PRODUCT DISCOUNT GROUP

PER BOX 1/40

| Order Code | Description | Watts | Colour Temp (K)/CRI | Lumens (lm) | Battery Duration | IP Rating | Dimensions (WxDia mm) |
|---|---|---|---|---|---|---|---|
| **710481** | EMERGENCY CORRIDOR DOWNLIGHT | 1W | 6000K/80 | 120 | 3 hours | IP20 | 23x40 |

Operating temperature 0°C to +40°C

# TEMPUS®
3 Hour Emergency
LED Lighting

essentials
EMERGENCY
LIGHTING

## Accessories

| Order Code | Description | IDC Code | Box Quantity |
|---|---|---|---|
| **710478** | EXTRA ARROW LEFT SIGN FOR **710476 EMERGENCY METAL EXIT LIGHT BOX** | 23 | 1/100 |
| **710479** | EXTRA ARROW RIGHT SIGN FOR **710476 EMERGENCY METAL EXIT LIGHT BOX** | 23 | 1/100 |
| **710491** | EXTRA ARROW UP SIGN FOR **710476 EMERGENCY METAL EXIT LIGHT BOX** | 23 | 1/100 |
| **710489** | DIRECTION PVC ARROW LEFT/RIGHT FOR **710487/710488 EMERGENCY PLASTIC EXIT SIGN** | 23 | 1/100 |
| **710492** | DIRECTION PVC ARROW UP FOR **710487/710488 EMERGENCY PLASTIC EXIT SIGN** | 23 | 1/100 |

# LED LAMPS

## ECONOMY AND PROFESSIONAL LEDs FOR ALL APPLICATIONS



# Economy & Professional LED Lamps



GU10s 52-55


OPAL GLS 60-63


FILAMENT GOLF BALL 72


G4 & G9 79


MR16 56


OPAL CANDLE 64-65


FILAMENT ST64 74


CLUSTERLITE® 80-81


AR111 57


OPAL GOLF BALL 66-67


FILAMENT GLOBE 75


OPAL REFLECTOR 58


FILAMENT GLS 68-69


T8 TUBES 76-77


PAR20/PAR30/PAR38 59


FILAMENT CANDLE 70-71


GX53 78


MEGAMAN®'s comprehensive range of Economy and Professional LED lamps that are designed to meet the needs and demands of various domestic and commercial applications.

With up to 3 years warranty and 50,000 hours rated life.

MEGAMAN®

# GU10
PAR16 LED Lamps
with 2 Year Warranty

**ECONOMY**
SERIES



## 4.2W GU10
PAR16 LED

- 98 LM/WATT

01 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **140510E** | 4.2W | 2700K/80 | 410 | N | GU10 | 36° | 15,000 | 55x50 |
| **140512E** | 4.2W | 4000K/80 | 410 | N | GU10 | 36° | 15,000 | 55x50 |
| **140514E** | 4.2W | 6500K/80 | 410 | N | GU10 | 36° | 15,000 | 55x50 |



## 5W GU10 DIMMING
PAR16 LED

- 82LM/WATT


Dimmable | 01 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **140500E** | 5W | 2700K /80 | 410 | Y | GU10 | 36° | 25,000 | 55x50 |
| **140502E** | 5W | 4000K/80 | 410 | Y | GU10 | 36° | 25,000 | 55x50 |
| **711920** | 5W | 6500K/80 | 410 | Y | GU10 | 36° | 25,000 | 55x50 |

PHOTOMETRIC DATA


140510E / 140512E / 140514E




| m | Lux | Ø cm |
|---|---|---|
| 0.5 | 2720 | 32 |
| 1 | 680 | 65 |
| 1.5 | 302 | 97 |
| 2 | 170 | 130 |

Beam angle = 36°

140500E / 140502E / 711920




| m | Lux | Ø cm |
|---|---|---|
| 0.5 | 2720 | 32 |
| 1 | 680 | 65 |
| 1.5 | 302 | 97 |
| 2 | 170 | 130 |

Beam angle = 36°

MEGAMAN®

# GU10
PAR16 LED Lamps
with 2 Year Warranty

**ECONOMY**
SERIES




## 4.2W GU10
PAR16 LED **5 PACK**

- 86LM/WATT

01 PRODUCT DISCOUNT GROUP

PER BOX 5/20


2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **710390E** | 4.2W | 2700K/80 | 360 | N | GU10 | 36° | 15,000 | 55x50 |
| **710391E** | 4.2W | 4000K/80 | 360 | N | GU10 | 36° | 15,000 | 55x50 |
| **711921** | 4.2W | 6500K/80 | 360 | N | GU10 | 36° | 15,000 | 55x50 |

PHOTOMETRIC DATA

710390E / 710391E / 711921




| m | Lux | Ø cm |
|---|---|---|
| 0.5 | 2720 | 32 |
| 1 | 680 | 65 |
| 1.5 | 302 | 97 |
| 2 | 170 | 130 |

Beam angle = 36°

MEGAMAN®

# GU10
PAR16 LED Lamps
with 2 Year Warranty

**ECONOMY**
SERIES



## 4.3W GU10 DIMMING
PAR16 74MM LED

- 106LM/WATT
- Improved Energy Class E rating

Dimmable | 01 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **141510E** | 4.3W | 2700K/80 | 460 | Y | GU10 | 90° | 25,000 | 74x50 |
| **141580E** | 4.3W | 4000K/80 | 460 | Y | GU10 | 90° | 25,000 | 74x50 |



## 4.7W GU10 COMPACT GLASS FINISH DIMMING
PAR16 LED

- 83LM/WATT


Dimmable | 01 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **142220E** | 4.7W | 2700K/80 | 390 | Y | GU10 | 36° | 15,000 | 55x50 |
| **142222E** | 4.7W | 4000K/80 | 390 | Y | GU10 | 36° | 15,000 | 55x50 |
| **142224E** | 4.7W | 6500K/80 | 390 | Y | GU10 | 36° | 15,000 | 55x50 |

PHOTOMETRIC DATA


141510E / 141580E




| m | Lux | Ø cm |
|---|---|---|
| 0.5 | 640 | 100 |
| 1 | 160 | 200 |
| 1.5 | 71 | 300 |
| 2 | 40 | 400 |

Beam angle = 90°

142220E / 142222E / 142224E




| m | Lux | Ø cm |
|---|---|---|
| 0.5 | 2600 | 32 |
| 1 | 650 | 65 |
| 1.5 | 289 | 97 |
| 2 | 163 | 130 |

Beam angle = 36°

MEGAMAN®

# GU10
PAR16 LED Lamps
with 3 Year Warranty

**PROFESSIONAL** SERIES



## 5.5W GU10 DIMMING
PAR16 LED

- 91LM/WATT

Dimmable | 01 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 3YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **140504E** | 5.5W | 2700K/80 | 500 | Y | GU10 | 36° | 25,000 | 55x50 |
| **140506E** | 5.5W | 4000K/80 | 500 | Y | GU10 | 36° | 25,000 | 55x50 |
| **140508E** | 5.5W | 6500K/80 | 500 | Y | GU10 | 36° | 25,000 | 55x50 |



## 5.3W GU10 DIMMING
## DUAL BEAM 24°/35°
PAR16 LED

- 104LM/WATT


DBT | U-DIM | 01 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 3YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **140516E** | 5.3W | 2700K/80 | 550 | Y | GU10 | 24°/ 35° | 25,000 | 56x50 |
| **140518** | 5.3W | 4000K/80 | 550 | Y | GU10 | 24°/ 35° | 25,000 | 56x50 |

PHOTOMETRIC DATA


140504E / 140506E / 140508E




| m | Lux | Ø cm |
|---|---|---|
| 0.5 | 2720 | 32 |
| 1 | 680 | 65 |
| 1.5 | 302 | 97 |
| 2 | 170 | 130 |


Beam angle = 36°

140516E / 140518




| m | Lux | Ø cm |
|---|---|---|
| 0.5 | 12000 | 21 |
| 1 | 3000 | 43 |
| 1.5 | 1333 | 64 |
| 2 | 750 | 85 |

Beam angle = 24°




| m | Lux | Ø cm |
|---|---|---|
| 0.5 | 6600 | 32 |
| 1 | 1650 | 63 |
| 1.5 | 733 | 95 |
| 2 | 413 | 126 |

Beam angle = 35°

MEGAMAN®

# MR16
LED Lamps
with 2 Year Warranty

**ECONOMY**
SERIES



## 4.4W MR16
GLASS NON-DIMMING LED

- 93LM/WATT

01 PRODUCT DISCOUNT GROUP

PER BOX 1/60


2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **142640E** | 4.4W | 2700K/80 | 410 | N | MR16 | 36° | 15,000 | 46x50 |
| **142642E** | 4.4W | 4000K/80 | 410 | N | MR16 | 36° | 15,000 | 46x50 |

PHOTOMETRIC DATA

142640E / 142642E




| m | Lux | Ø cm |
|---|---|---|
| 0.5 | 1520 | 32 |
| 1 | 380 | 65 |
| 1.5 | 169 | 97 |
| 2 | 95 | 130 |

Beam angle = 36°

MEGAMAN®

# AR111
LED Lamps
with 3 Year Warranty

**PROFESSIONAL** SERIES



## 11.5W G53 DIMMING DUAL BEAM 24°/45° G53 LED

- 82LM/WATT

DBT · U-DIM · 01 PRODUCT DISCOUNT GROUP · PER BOX 1/30 · 3YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **142620E** | 11.5W | 2800K/80 | 900/950 | Y | G53 | 24°/ 45° | 40,000 | 58x111 |



## 11W GU10 DIMMING DUAL BEAM 24°/45° GU10 LED

- 86LM/WATT


DBT · U-DIM · 01 PRODUCT DISCOUNT GROUP · PER BOX 1/24 · 3YR WARRANTY


SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **142624E** | 11W | 2700K/80 | 870/950 | Y | GU10 | 24°/ 45° | 40,000 | 82x111 |
| **142626E** | 11W | 4000K/80 | 870/950 | Y | GU10 | 24°/ 45° | 40,000 | 82x111 |


PHOTOMETRIC DATA


142620E




142624E / 142626E



MEGAMAN®

# OPAL REFLECTOR
LED Lamps
with 2 Year Warranty

**ECONOMY**
SERIES



## 4.9W R50
## OPAL REFLECTOR
NON-DIMMING LED

- 96LM/WATT

01 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **711721** | 4.9W | 2700K/80 | 470 | N | E14 | 100° | 15,000 | 81x50 |



## 4.9W R63
## OPAL REFLECTOR
NON-DIMMING LED

- 96LM/WATT

01 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **709894** | 4.9W | 2700K/80 | 470 | N | E27 | 100° | 15,000 | 102x63 |



## 8.6W R80
## OPAL REFLECTOR
NON-DIMMING LED

- 94LM/WATT

01 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **709224** | 8.6W | 2700K/80 | 810 | N | E27 | 100° | 15,000 | 110x80 |

MEGAMAN®

# PAR20, PAR30 & PAR38
LED Lamps
with 2 Year Warranty

**ECONOMY**
SERIES



## 7W PAR20 36° REFLECTOR
NON-DIMMING LED

- 94LM/WATT

IP65 | 01 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **711726** | 7W | 3000K/80 | 660 | N | E27 | 36° | 15,000 | 63x90 |



## 11W PAR30 36° REFLECTOR
NON-DIMMING LED

- 95LM/WATT

IP65 | 01 PRODUCT DISCOUNT GROUP | PER BOX 1/24 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **711496** | 11W | 3000K/80 | 1050 | N | E27 | 36° | 15,000 | 95x105 |



## 16W PAR38 36° REFLECTOR
NON-DIMMING LED

- 100LM/WATT

IP65 | 01 PRODUCT DISCOUNT GROUP | PER BOX 1/24 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **711489** | 16W | 3000K/80 | 1600 | N | E27 | 36° | 15,000 | 120x135 |

MEGAMAN®

# OPAL CLASSIC
GLS LED Lamps
with 2 Year Warranty

**ECONOMY**
SERIES



## 4.8W OPAL CLASSIC
GLS LED

- 98 LM/WATT

330° | 13 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **143360E** | 4.8W | 2700K/80 | 470 | N | E27 | 330° | 15,000 | 109x60 |
| **143362E** | 4.8W | 2700K/80 | 470 | N | B22 | 330° | 15,000 | 109x60 |

MEGAMAN®

# OPAL CLASSIC
GLS LED Lamps
with 2 Year Warranty

**ECONOMY**
SERIES



## 8.6W OPAL CLASSIC
GLS LED

- 94 LM/WATT

330° | 13 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **143316E** | 8.6W | 2700K/80 | 810 | N | E27 | 330° | 15,000 | 109x60 |
| **143318E** | 8.6W | 2700K/80 | 810 | N | B22 | 330° | 15,000 | 109x60 |
| **143370E** | 8.6W | 4000K/80 | 810 | N | B22 | 330° | 15,000 | 109x60 |
| **143372E** | 8.6W | 4000K/80 | 810 | N | E27 | 330° | 15,000 | 109x60 |
| **143374E** | 8.6W | 6500K/80 | 810 | N | E27 | 330° | 15,000 | 109x60 |
| **143376E** | 8.6W | 6500K/80 | 810 | N | B22 | 330° | 15,000 | 109x60 |



## 8.5W OPAL CLASSIC
**DIMMING** GLS LED

- 95LM/WATT

Dimmable | 330° | 13 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **711181** | 8.5W | 2700K/80 | 810 | Y | B22 | 330° | 25,000 | 109x60 |
| **711182** | 8.5W | 2700K/80 | 810 | Y | E27 | 330° | 25,000 | 109x60 |
| **711115** | 8.5W | 4000K/80 | 810 | Y | B22 | 330° | 25,000 | 109x60 |
| **711116** | 8.5W | 4000K/80 | 810 | Y | E27 | 330° | 25,000 | 109x60 |
| **711925** | 8.5W | 6500K/80 | 810 | Y | B22 | 330° | 25,000 | 109x60 |
| **711262** | 8.5W | 6500K/80 | 810 | Y | E27 | 330° | 25,000 | 109x60 |

MEGAMAN®

# OPAL CLASSIC
GLS LED Lamps
with 2 Year Warranty

**ECONOMY**
SERIES



## 9.6W OPAL CLASSIC
GLS LED

- 110 LM/WATT

330° | 13 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **142532E** | 9.6W | 2700K 80 | 1055 | N | E27 | 330° | 15,000 | 109x60 |
| **142534E** | 9.6W | 2700K/80 | 1055 | N | B22 | 330° | 15,000 | 109x60 |




## 9.6W OPAL CLASSIC
GLS LED **TRADE 10 PACK**

- 110LM/WATT

330° | 13 PRODUCT DISCOUNT GROUP | PER BOX 1/6 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **710464E** | 9.6W | 2700K/80 | 1055 | N | B22 | 330° | 15,000 | 109x60 |
| **710466E** | 9.6W | 2700K/80 | 1055 | N | E27 | 330° | 15,000 | 109x60 |
| **710467E** | 9.6W | 4000K/80 | 1055 | N | E27 | 330° | 15,000 | 109x60 |
| **710465E** | 9.6W | 4000K/80 | 1055 | N | B22 | 330° | 15,000 | 109x60 |
| **711922** | 9.6W | 6500K/80 | 1055 | N | E27 | 330° | 15,000 | 109x60 |
| **711923** | 9.6W | 6500K/80 | 1055 | N | B22 | 330° | 15,000 | 109x60 |

MEGAMAN®

# OPAL CLASSIC
GLS LED Lamps
with 2 Year Warranty

**ECONOMY**
SERIES



## 13.3W OPAL CLASSIC
GLS LED

- 114 LM/WATT

330° | 13 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **148390E** | 13.3W | 2700K/80 | 1521 | N | E27 | 330° | 15,000 | 114x60 |
| **148392E** | 13.3W | 2700K/80 | 1521 | N | B22 | 330° | 15,000 | 114x60 |

MEGAMAN®

# OPAL CANDLE
LED Lamps
with 2 Year Warranty

**ECONOMY**
SERIES



## 2.9W OPAL CANDLE
NON-DIMMING LED

- 86LM/WATT

330° | 13 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **143300E** | 2.9W | 2700K/80 | 250 | N | E14 | 330° | 15,000 | 100x35 |
| **143302E** | 2.9W | 2700K/80 | 250 | N | E27 | 330° | 15,000 | 100x35 |
| **143304E** | 2.9W | 2700K/80 | 250 | N | B15 | 330° | 15,000 | 100x35 |
| **143306E** | 2.9W | 2700K/80 | 250 | N | B22 | 330° | 15,000 | 100x35 |



## 2.9W OPAL CANDLE
**DIMMING** LED

- 86LM/WATT

Dimmable | 330° | 13 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **711163** | 2.9W | 2700K / 80 | 250 | Y | E14 | 330° | 25,000 | 100x35 |

MEGAMAN®

# OPAL CANDLE
LED Lamps
with 2 Year Warranty

**ECONOMY**
SERIES



## 4.9W OPAL CANDLE
NON-DIMMING LED

- 96LM/WATT

330° | 13 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **143308E** | 4.9W | 2700K / 80 | 470 | N | E14 | 330° | 15,000 | 100x35 |
| **143310E** | 4.9W | 2700K / 80 | 470 | N | E27 | 330° | 15,000 | 100x35 |
| **143312E** | 4.9W | 2700K / 80 | 470 | N | B15 | 330° | 15,000 | 100x35 |
| **143314E** | 4.9W | 2700K / 80 | 470 | N | B22 | 330° | 15,000 | 100x35 |
| **143350E** | 4.9W | 4000K / 80 | 470 | N | E14 | 330° | 15,000 | 100x35 |
| **143352E** | 4.9W | 4000K / 80 | 470 | N | E27 | 330° | 15,000 | 100x35 |
| **143354E** | 4.9W | 4000K / 80 | 470 | N | B15 | 330° | 15,000 | 100x35 |
| **143356E** | 4.9W | 4000K / 80 | 470 | N | B22 | 330° | 15,000 | 100x35 |



## 5.5W OPAL CANDLE
**DIMMING** LED

- 86LM/WATT

Dimmable | 330° | 13 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **711403** | 5.5W | 2700K/80 | 470 | Y | E14 | 330° | 25,000 | 100x35 |
| **711107** | 5.5W | 2700K/80 | 470 | Y | B22 | 330° | 25,000 | 100x35 |
| **711511** | 5.5W | 2700K/80 | 470 | Y | E27 | 330° | 25,000 | 100x35 |
| **711512** | 5.5W | 2700K/80 | 470 | Y | B15 | 330° | 25,000 | 100x35 |
| **711108** | 5.5W | 4000K/80 | 470 | Y | E14 | 330° | 25,000 | 100x35 |

MEGAMAN®

# OPAL GOLF BALL
LED Lamps
with 2 Year Warranty

**ECONOMY**
SERIES




## 2.9W OPAL GOLF BALL
NON-DIMMING LED

- 86LM/WATT

330° | 13 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **143390E** | 2.9W | 2700K/80 | 250 | N | E14 | 330° | 15,000 | 87x45 |
| **143392E** | 2.9W | 2700K/80 | 250 | N | E27 | 330° | 15,000 | 87x45 |
| **143394E** | 2.9W | 2700K/80 | 250 | N | B22 | 330° | 15,000 | 87x45 |

MEGAMAN®

# OPAL GOLF BALL
LED Lamps
with 2 Year Warranty

**ECONOMY**
SERIES




## 5.5W OPAL GOLF BALL
## DIMMING LED

- 85LM/WATT

330°

13 PRODUCT DISCOUNT GROUP

PER BOX 1/60

2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **711109** | 5.5W | 2700K/80 | 470 | Y | B22 | 330° | 25,000 | 87x45 |
| **711110** | 5.5W | 4000K/80 | 470 | Y | B22 | 330° | 25,000 | 87x45 |
| **711111** | 5.5W | 2700K/80 | 470 | Y | E14 | 330° | 25,000 | 87x45 |
| **711112** | 5.5W | 4000K/80 | 470 | Y | E14 | 330° | 25,000 | 87x45 |
| **711113** | 5.5W | 2700K/80 | 470 | Y | E27 | 330° | 25,000 | 87x45 |
| **711114** | 5.5W | 4000K/80 | 470 | Y | E27 | 330° | 25,000 | 87x45 |

MEGAMAN®

# FILAMENT CLASSIC
GLS LED Lamps
with 2 Year Warranty

**ECONOMY**
SERIES



## 4W FILAMENT CLASSIC
NON-DIMMING GLS LED

- 118LM/WATT

360° | 13 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **146210E** | 4W | 2700K/80 | 470 | N | E27 | 360° | 15,000 | 104x60 |
| **146376E** | 4W | 2700K/80 | 470 | N | B22 | 360° | 15,000 | 104x60 |

MEGAMAN®

# FILAMENT CLASSIC
GLS LED Lamps
with 2 Year Warranty

**ECONOMY**
SERIES



## 6.8W FILAMENT CLASSIC
NON-DIMMING GLS LED

- 119LM/WATT

360° | 13 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **146212E** | 6.8W | 2700K/80 | 810 | N | E27 | 360° | 15,000 | 104x60 |
| **707171E** | 6.8W | 2700K/80 | 810 | N | B22 | 360° | 15,000 | 104x60 |



## 7.2W FILAMENT CLASSIC
**DIMMING** GLS LED

- 113LM/WATT

Dimmable | 360° | 13 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **711166** | 7.2W | 2700K/80 | 810 | Y | E27 | 360° | 15,000 | 104x60 |
| **712087** | 7.2W | 2700K/80 | 810 | Y | B22 | 360° | 15,000 | 104x60 |

MEGAMAN®

# FILAMENT CANDLE
LED Lamps
with 2 Year Warranty

**ECONOMY**
SERIES



## 2.1W FILAMENT CANDLE
NON-DIMMING LED

- 119LM/WATT

360° | 03 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **146222E** | 2.1W | 2700K/80 | 250 | N | E14 | 360° | 15,000 | 97x35 |

MEGAMAN®

# FILAMENT CLASSIC
GLS LED Lamps
with 2 Year Warranty

**ECONOMY**
SERIES



## 4W FILAMENT CANDLE
NON-DIMMING LED

- 112LM/WATT

360° | 03 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **146224E** | 4W | 2700K/80 | 470 | N | E14 | 360° | 15,000 | 97x35 |
| **710506E** | 4W | 2700K/80 | 470 | N | B22 | 360° | 15,000 | 97x35 |
| **709927E** | 4W | 2700K/80 | 470 | N | E27 | 360° | 15,000 | 97x35 |
| **710505E** | 4W | 2700K/80 | 470 | N | B15 | 360° | 15,000 | 97x35 |



## 4.2W FILAMENT CANDLE
**DIMMING** LED

- 112LM/WATT

Dimmable | 360° | 03 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **711370** | 4.2W | 2700K/80 | 470 | Y | E27 | 360° | 15,000 | 97x35 |
| **710509E** | 4.2W | 2700K/80 | 470 | Y | B22 | 360° | 15,000 | 97x35 |
| **711371** | 4.2W | 2700K/80 | 470 | Y | B15 | 360° | 15,000 | 97x35 |
| **146226E** | 4.2W | 2700K/80 | 470 | Y | E14 | 360° | 15,000 | 97x35 |

MEGAMAN®

# FILAMENT GOLF BALL
LED Lamps
with 2 Year Warranty

**ECONOMY**
SERIES



## 4W FILAMENT GOLF BALL
NON-DIMMING LED

- 118LM/WATT

360° | 03 PRODUCT DISCLOSURE GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **146230E** | 4W | 2700K/80 | 470 | N | E14 | 360° | 15,000 | 79x45 |
| **709926E** | 4W | 2700K/80 | 470 | N | E27 | 360° | 15,000 | 79x45 |
| **712090** | 4W | 2700K/80 | 470 | N | B15 | 360° | 15,000 | 79x45 |
| **712091** | 4W | 2700K/80 | 470 | N | B22 | 360° | 15,000 | 79x45 |



## 4.2W FILAMENT GOLF BALL
**DIMMING** LED

- 112LM/WATT

Dimmable | 360° | 03 PRODUCT DISCLOSURE GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **711385** | 4.2W | 2700K/80 | 470 | Y | E14 | 360° | 15,000 | 79x45 |
| **711455** | 4.2W | 2700K/80 | 470 | Y | E27 | 360° | 15,000 | 79x45 |
| **712088** | 4.2W | 2700K/80 | 470 | Y | B15 | 360° | 15,000 | 79x45 |
| **712089** | 4.2W | 2700K/80 | 470 | Y | B22 | 360° | 15,000 | 79x45 |



MEGAMAN®

# FILAMENT ST64
LED Lamps
with 2 Year Warranty

**ECONOMY**
SERIES



## 4W FILAMENT ST64
NON-DIMMING LED

- 118LM/WATT

360° | 03 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **146234E** | 4W | 2700K/80 | 470 | N | E27 | 360° | 15,000 | 140x64 |



## 6.8W FILAMENT ST64
NON-DIMMING LED

- 119LM/WATT

360° | 03 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **146236E** | 6.8W | 2700K/80 | 810 | N | E27 | 360° | 15,000 | 140x64 |



## 7.2W FILAMENT ST64
**DIMMING** LED

- 113LM/WATT

Dimmable | 360° | 03 PRODUCT DISCOUNT GROUP | PER BOX 1/60 | 2YR WARRANTY


SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **712092** | 7.2W | 2700K/80 | 810 | Y | E27 | 360° | 15,000 | 140x64 |

MEGAMAN®

# FILAMENT GLOBE
LED Lamps
with 2 Year Warranty

**ECONOMY**
SERIES



## 4W FILAMENT GLOBE
NON-DIMMING LED

- 210LM/WATT

360° | 03 PRODUCT DISCOUNT GROUP | PER BOX 1/24 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **712093** | 4W | 2700K/80 | 840 | N | E27 | 360° | 50,000 | 137x95 |



## 7.2W FILAMENT GLOBE
**DIMMING** LED

- 112LM/WATT

Dimmable | 360° | 03 PRODUCT DISCOUNT GROUP | PER BOX 1/24 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **710026** | 7.2W | 2700K/80 | 810 | Y | E27 | 360° | 15,000 | 137x95 |

MEGAMAN®

# T8 TUBES
LED Lamps
with 3 Year Warranty

**PROFESSIONAL** SERIES



## 9-24.5W T8 TUBE SHATTERPROOF LED

**New flexible range of MEGAMAN® Professional T8 LED tube lamps with shatterproof PET coating as standard*.**

- 123-147LM/WATT
- Magnetic Ballast Compatible
- No rewiring needed. Ideal for quick, safe and easy retrofit

SHATTERPROOF · 330° · 13 PRODUCT WARRANTY GROUP · 3YR WARRANTY


SCAN THE QR CODE FOR MORE INFORMATION


| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **711926** | 9W | 4000K / 80 | 1150 | N | G13 | 330° | 30,000 | 603x28 (2FT) |
| **711927** | 9W | 6500K / 80 | 1150 | N | G13 | 330° | 30,000 | 603x28 (2FT) |
| **711928** | 16W | 4000K / 80 | 2000 | N | G13 | 330° | 30,000 | 1212x28 (4FT) |
| **711929** | 16W | 6500K / 80 | 2000 | N | G13 | 330° | 30,000 | 1212x28 (4FT) |
| **711930** | 22W | 4000K / 80 | 2700 | N | G13 | 330° | 30,000 | 1513x28 (5FT) |
| **711931** | 22W | 6500K / 80 | 2700 | N | G13 | 330° | 30,000 | 1513x28 (5FT) |
| **711932** | 24.5W | 4000K / 80 | 3100 | N | G13 | 330° | 30,000 | 1779x28 (6FT)* |
| **711933** | 24.5W | 6500K / 80 | 3100 | N | G13 | 330° | 30,000 | 1779x28 (6FT)* |


*6FT size not available in shatterproof tubes

NO REWIRING NEEDED

SINGLE ENDED INPUT



MEGAMAN®

# T8 MICROWAVE SENSOR TUBES with 3 Year Warranty

**PROFESSIONAL** SERIES



## 6.5-20W T8 TUBE SHATTERPROOF LED WITH MICROWAVE SENSOR

**Automatically dims down to 2W after 30 seconds of non-detection**

- 123-147LM/WATT
- Magnetic Ballast Compatible
- No rewiring needed. Ideal for quick, safe and easy retrofit

Microwave Motion Sensor | SHATTERPROOF | 330° | 13 PRODUCT DECISION GROUP | 3YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **711394** | 6.5W | 4000K/80 | 900 | N | G13 | 330° | 50,000 | 603x28 (2FT) |
| **711936** | 12W | 4000K/80 | 1800 | N | G13 | 330° | 50,000 | 1212x28 (4FT) |
| **711939** | 18W | 4000K/80 | 2700 | N | G13 | 330° | 50,000 | 1513x28 (5FT) |
| **711940** | 20W | 4000K/80 | 3100 | N | G13 | 330° | 50,000 | 1779x28 (6FT)* |


*6FT size not available in shatterproof tubes


Full Output

2W STAND-BY

New flexible range of MEGAMAN® Professional T8 LED tube lamps with shatterproof PET coating as standard*.


Microwave Sensor option automatically dims down to 2W after 30 seconds of non-detection for a safe and intelligent solution, to even greater long-term energy and cost savings.



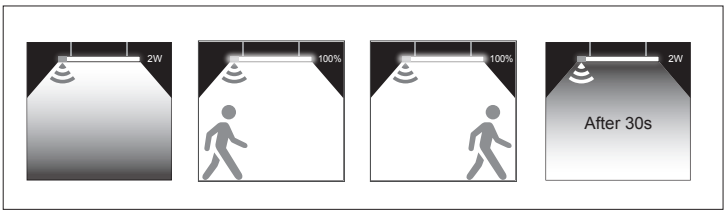
NO REWIRING NEEDED

SINGLE ENDED INPUT



MEGAMAN®

# GX53
LED Lamps
with 2 Year Warranty

**ECONOMY**
SERIES



## 3.2W GX53
NON-DIMMING LED

- 100LM/WATT

01 PRODUCT DISCOUNT GROUP

PER BOX 1/60

2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|
| **147365E** | 3.2W | 2700K/80 | 300 | N | GX53 | 15,000 | 24x75 |
| **147379E** | 3.2W | 4000K/80 | 300 | N | GX53 | 15,000 | 24x75 |

MEGAMAN®

# G4 & G9
LED Lamps
with 2 Year Warranty

**ECONOMY**
SERIES



## 1.7W G4
12V
NON-DIMMING LED

- 105LM/WATT

13 PRODUCT DISCOUNT GROUP | PER BOX 1/180 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **711180** | 1.7W | 2700K/80 | 180 | N | G4 | 330° | 15,000 | 40x10 |



## 2.1W G9
NON-DIMMING LED

- 100LM/WATT

13 PRODUCT DISCOUNT GROUP | PER BOX 1/180 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **142400E** | 2.1W | 2700K/80 | 180 | N | G9 | 330° | 15,000 | 43x19 |



## 2.5W G9
**DIMMING** LED

- 150LM/WATT

Dimmable | 13 PRODUCT DISCOUNT GROUP | PER BOX 1/180 | 2YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Beam Angle | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|---|
| **142403E** | 2.5W | 2700K/80 | 300 | Y | G9 | 330° | 25,000 | 56x18 |

MEGAMAN®

# CLUSTERLITE®
LED Lamps
with 3 Year Warranty

**PROFESSIONAL**
SERIES



## 32W CLUSTERLITE®
PASSIVE COOLING LED

- 131LM/WATT
- IP20

06 PRODUCT DISCOUNT GROUP

PER BOX 1/24

3YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|
| **804610** | 32W | 4000K/80 | 4200 | N | E27 | 30,000 | 196x63 |

MEGAMAN®

# CLUSTERLITE®
LED Lamps
with 3 Year Warranty

**PROFESSIONAL** SERIES



## 22W CLUSTERLITE®
ACTIVE COOLING LED

- 136LM/WATT
- IP20

06 PRODUCT DISCOUNT GROUP | PER BOX 1/24 | 3YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|
| **711746** | 22W | 4000K/80 | 3000 | N | E27 | 45,000 | 196x63 |



## 33W CLUSTERLITE®
ACTIVE COOLING LED

- 152LM/WATT
- IP20

06 PRODUCT DISCOUNT GROUP | PER BOX 1/24 | 3YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|
| **804606** | 33W | 4000K/80 | 5000 | N | E27 | 30,000 | 188x63 |



## 46W CLUSTERLITE®
ACTIVE COOLING LED

- 152LM/WATT
- IP20

06 PRODUCT DISCOUNT GROUP | PER BOX 1/24 | 3YR WARRANTY

SCAN THE QR CODE FOR MORE INFORMATION

| Order Code | Watts | Colour (K) /CRI | Lumens (lm) | Dimmable | Lamp Base | Hrs Lamp Life (max) | Dimensions (LxDia mm) |
|---|---|---|---|---|---|---|---|
| **804608** | 46W | 4000K/80 | 7000 | N | E27 | 30,000 | 225x63 |



140518
141510E
141580E
142220E
142222E
142224E
142400E
142403E
142532E
142534E
142620E
142624E
142626E
142640E
142642E
143300E
143302E
143304E
143306E
143308E

MEGAMAN®

# PRODUCT GUIDE INDEX

To find the page that the MEGAMAN® LED fixture or LED lamp is within the product guide, use the product order code listed in the following index pages.

MEGAMAN®

# PRODUCT GUIDE INDEX


| PRODUCT CODE | PAGE NUMBER |
|---|---|
| 110110 | 10/30 |
| 130340 | 10 |
| 130342 | 10 |
| 130344 | 10 |
| 140500E | 52 |
| 140502E | 52 |
| 140504E | 55 |
| 140506E | 55 |
| 140508E | 55 |
| 140510E | 52 |
| 140512E | 52 |
| 140514E | 52 |
| 140516E | 55 |
| 140518 | 55 |
| 141510E | 54 |
| 141580E | 54 |
| 142220E | 54 |
| 142222E | 54 |
| 142224E | 54 |
| 142400E | 79 |
| 142403E | 79 |
| 142532E | 62 |
| 142534E | 62 |
| 142620E | 57 |
| 142624E | 57 |
| 142626E | 57 |
| 142640E | 56 |
| 142642E | 56 |
| 143300E | 64 |
| 143302E | 64 |
| 143304E | 64 |
| 143306E | 64 |
| 143308E | 65 |
| 143310E | 65 |
| 143312E | 65 |
| 143314E | 65 |
| 143316E | 61 |
| 143318E | 61 |
| 143350E | 65 |
| 143352E | 65 |
| 143354E | 65 |

| PRODUCT CODE | PAGE NUMBER |
|---|---|
| 143356E | 65 |
| 143360E | 60 |
| 143362E | 60 |
| 143370E | 61 |
| 143372E | 61 |
| 143374E | 61 |
| 143376E | 61 |
| 143390E | 66 |
| 143392E | 66 |
| 143394E | 66 |
| 146210E | 68 |
| 146212E | 69 |
| 146222E | 70 |
| 146224E | 71 |
| 146226E | 71 |
| 146230E | 72 |
| 146234E | 74 |
| 146236E | 74 |
| 146376E | 68 |
| 147365E | 78 |
| 147379E | 78 |
| 148390E | 63 |
| 148392E | 63 |
| 180342E | 13 |
| 180344E | 13 |
| 180346E | 13 |
| 180348E | 13 |
| 180350E | 13 |
| 180380E | 13 |
| 180382E | 13 |
| 180384E | 13 |
| 180386E | 13 |
| 180388E | 13 |
| 180390E | 13 |
| 180392E | 13 |
| 180394E | 13 |
| 180396E | 13 |
| 180398E | 13 |
| 190704 | 11 |
| 190706 | 11 |
| 190740 | 15 |

| PRODUCT CODE | PAGE NUMBER |
|---|---|
| 190742 | 15 |
| 190750 | 15 |
| 190796 | 15 |
| 190798 | 15 |
| 519030 | 17 |
| 519034 | 17 |
| 519036 | 17 |
| 519038 | 17 |
| 519040 | 17 |
| 519042 | 17 |
| 707171E | 69 |
| 709224 | 58 |
| 709894 | 58 |
| 709926E | 72 |
| 709927E | 71 |
| 710264 | 12 |
| 710267 | 12 |
| 710274 | 12 |
| 710286 | 12 |
| 710390E | 53 |
| 710391E | 53 |
| 710430 | 12 |
| 710464E | 62 |
| 710465E | 62 |
| 710466E | 62 |
| 710467E | 62 |
| 710474 | 44 |
| 710476 | 44 |
| 710478 | 27/49 |
| 710479 | 27/49 |
| 710480 | 48 |
| 710481 | 48 |
| 710482 | 47 |
| 710483 | 47 |
| 710485 | 46 |
| 710487 | 45 |
| 710488 | 45 |
| 710489 | 27/49 |
| 710491 | 27/49 |
| 710492 | 27/49 |
| 710502BACKLIT | 30 |
| 710502SIDELIT | 10 |

| PRODUCT CODE | PAGE NUMBER |
|---|---|
| 710505E | 71 |
| 710506E | 71 |
| 710509E | 71 |
| 710675 | 30 |
| 710676 | 30 |
| 710712 | 14/15 |
| 710729 | 11 |
| 710842 | 11 |
| 710931 | 11 |
| 710931EMG | 11 |
| 710933 | 10/30 |
| 710940 | 30 |
| 710941 | 10/30 |
| 710971 | 11 |
| 710978 | 46 |
| 711044 | 26 |
| 711045 | 26 |
| 711046 | 25 |
| 711047 | 25 |
| 711049 | 23 |
| 711050 | 23 |
| 711051 | 22 |
| 711052 | 22 |
| 711081 | 30 |
| 711082 | 30 |
| 711085 | 16 |
| 711087 | 16 |
| 711088 | 16 |
| 711102 | 14/15 |
| 711107 | 65 |
| 711108 | 65 |
| 711109 | 67 |
| 711110 | 67 |
| 711111 | 67 |
| 711112 | 67 |
| 711113 | 67 |
| 711114 | 67 |
| 711115 | 61 |
| 711116 | 61 |
| 711126 | 40 |
| 711128 | 40 |

| PRODUCT CODE | PAGE NUMBER |
|---|---|
| 711140 | 40 |
| 711142 | 40 |
| 711163 | 64 |
| 711166 | 69 |
| 711180 | 79 |
| 711181 | 61 |
| 711182 | 61 |
| 711183 | 16 |
| 711260 | 31 |
| 711260EMG | 31 |
| 711261 | 31 |
| 711261EMG | 31 |
| 711262 | 61 |
| 711263 | 31 |
| 711263EMG | 31 |
| 711264 | 31 |
| 711285 | 32 |
| 711286 | 32 |
| 711288 | 32 |
| 711289 | 32 |
| 711291 | 32 |
| 711292 | 33 |
| 711293 | 33 |
| 711295 | 33 |
| 711320 | 31 |
| 711321 | 31 |
| 711322 | 31 |
| 711323 | 31 |
| 711329 | 34 |
| 711330 | 34 |
| 711331 | 34 |
| 711332 | 34 |
| 711334 | 36 |
| 711335 | 36 |
| 711336 | 36 |
| 711337 | 36 |
| 711338 | 36 |
| 711339 | 36 |
| 711340 | 36 |
| 711341 | 36 |
| 711342 | 38 |
| 711343 | 38 |

MEGAMAN®

# PRODUCT GUIDE INDEX


| PRODUCT CODE | PAGE NUMBER |
|---|---|
| 711344 | 38 |
| 711345 | 38 |
| 711346 | 38 |
| 711347 | 38 |
| 711365 | 24 |
| 711366 | 24 |
| 711370 | 71 |
| 711371 | 71 |
| 711385 | 72 |
| 711403 | 65 |
| 711411 | 35 |
| 711412 | 35 |
| 711413 | 35 |
| 711417 | 41 |
| 711418 | 41 |
| 711419 | 41 |
| 711420 | 41 |
| 711421 | 41 |
| 711425 | 14 |
| 711426 | 14 |
| 711427 | 14 |
| 711455 | 72 |
| 711473 | 10/30 |
| 711489 | 59 |
| 711496 | 59 |
| 711511 | 65 |
| 711512 | 65 |
| 711721 | 58 |
| 711726 | 59 |
| 711746 | 81 |
| 711920 | 52 |
| 711921 | 53 |
| 711922 | 62 |
| 711923 | 62 |
| 711925 | 61 |
| 711926 | 76 |
| 711927 | 76 |
| 711928 | 76 |
| 711929 | 76 |
| 711930 | 76 |
| 711931 | 76 |
| 711932 | 76 |

| PRODUCT CODE | PAGE NUMBER |
|---|---|
| 711933 | 76 |
| 711934 | 77 |
| 711936 | 77 |
| 711939 | 77 |
| 711940 | 77 |
| 712002 | 30 |
| 712038 | 18 |
| 712040 | 19 |
| 712041 | 19 |
| 712042 | 19 |
| 712043 | 19 |
| 712044 | 19 |
| 712045 | 19 |
| 712046 | 19 |
| 712047 | 19 |
| 712048 | 19 |
| 712049 | 19 |
| 712061 | 37 |
| 712062 | 37 |
| 712063 | 37 |
| 712064 | 37 |
| 712065 | 37 |
| 712066 | 37 |
| 712067 | 37 |
| 712068 | 37 |
| 712069 | 39 |
| 712070 | 39 |
| 712071 | 39 |
| 712087 | 69 |
| 712088 | 72 |
| 712089 | 72 |
| 712090 | 72 |
| 712091 | 72 |
| 712092 | 74 |
| 712093 | 75 |
| 712120 | 39 |
| 804606 | 81 |
| 804608 | 81 |
| 804610 | 80 |
| EMG147247 | 17/41 |



MEGAMAN®

MEGAMAN®



Megaman (UK) Limited
Megaman House
2 Quadrant Park
Mundells
Welwyn Garden City
Herts AL7 1FS

T: +44 (0)1707 386000
E: sales@megamanuk.com
W: www.megamanuk.com

Follow us
**@megamanukltd**

© MEGAMAN® (UK) LTD JANUARY 2024

**All information stated is correct at the time of printing and subject to change without prior notice.**